


Mini Box Cove LED

Submittal

Project Name _____ SO # _____


Pattern-4 Sided Coffer Corner

Fixture Type _____ PO# _____

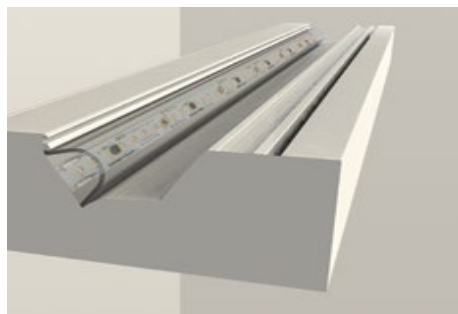

Ordering Information

| WG-MBC | PC | | | | | | | SM | |
|--------|-----------------|---------------|------------------|--|------------------------------------|---|---------------------|-------|----------------------|
| Model | Type | Length | LED ³ | Color | Voltage | Power | Diffuser | Mount | Options ² |
| WG-MBC | PC ² | A x B x A x B | L M H | 827 830 835 840 927 930 935 940 | UNV 120 | S D010 D3W DES DFPN | S (STD) OF SF | SM | |

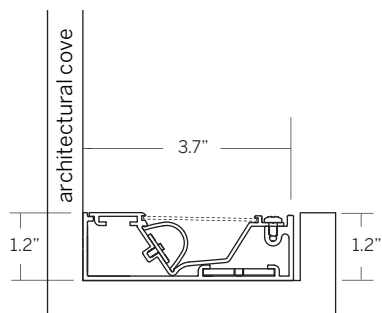

Luminaire

- Indirect cove system featuring clean box profile for continuous lighting inside coves or as stand alone cove system.
- White LED light source.
- Lengths and angles factory cut to exact field dimensions.
- Powder coat painted white - RAL 9010.
- Snap-on satin diffuser optimized for forward distribution (standard).

Type

- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners²

Length

- A, B, C = specify feet & inches to the nearest 0.25" (i.e. 6' 5.5")

LED³

- L = Low Power (3W/ft)
- M = Mid Power (6W/ft)
- H = High Power (10W/ft)

Color

80+ CRI minimum

- 827 = 2700K
- 830 = 3000K
- 835 = 3500K
- 840 = 4000K
- For 90+ CRI specify 927, 930, etc

Voltage

- UNV = 120-277V
- 120 = 120V (DFPN only)

Power Supply (remote)

- S = Standard driver, 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- D3W = Lutron, 1%, 3-wire fluorescent dimming, 120-277V
- DES = Lutron, 1%, EcoSystem E1/E2 digital dimming, 120-277V
- DFPN = Lutron 1% forward phase with neutral, 120V only

Diffuser


- S = Snap-on satin diffuser (standard)
- OF = Opal flat diffuser
- SF = Satin flat diffuser

Mounting

- SM = Surface

Options²

- Contact factory for emergency lighting options

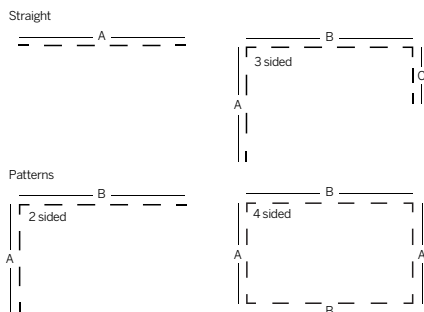

Customer Approval

| | |
|---|------------------|
| <input type="checkbox"/> Approved | Company _____ |
| <input type="checkbox"/> Approved corrections noted | Signature _____ |
| <input type="checkbox"/> Revise and Resubmit | Print Name _____ |
| | Date _____ |

Original Submission Date _____

- 1 Standard setup assumes the cove ends at a perpendicular wall and the led board is set back from the end to minimize light on the perpendicular wall. Contact us for options.
- 2 See pattern specs sheet.
- 3 Wattage shown does not include power supplies/drivers.

Mini Box Cove LED

Submittal

Project Name _____ SO # _____

Pattern-4 Sided Coffe Corner

Fixture Type _____ PO# _____

| System | Qty. | Overall Length | |
|--------|-------|----------------|-------|
| | | 'A' | 'B' |
| 1 | _____ | _____ | _____ |
| 2 | _____ | _____ | _____ |
| 3 | _____ | _____ | _____ |
| 4 | _____ | _____ | _____ |

Customer Approval

☐

Approved

☐

Approved with
corrections noted

☐

Revise and Resubmit

Company _____

Signature _____

Print Name _____

Date _____

* overall length of finished mounting surface

