


| SB SPOKE BRACKET SPECIFICATIONS | | | | | |
|---------------------------------|---------------|-----------------------|--------------------------|------------------------------|-------------------|
| CATALOG # | BRACKET TENON | BRACKET EPA (SQ. FT.) | MAX. LUMINAIRE WT. (LBS) | MAX. LUMINAIRE EPA (SQ. FT.) | SHIP WEIGHT (LBS) |
| SB-19 | 1 @ 90 | 0.3 | 125 | 6.0 | 8 |

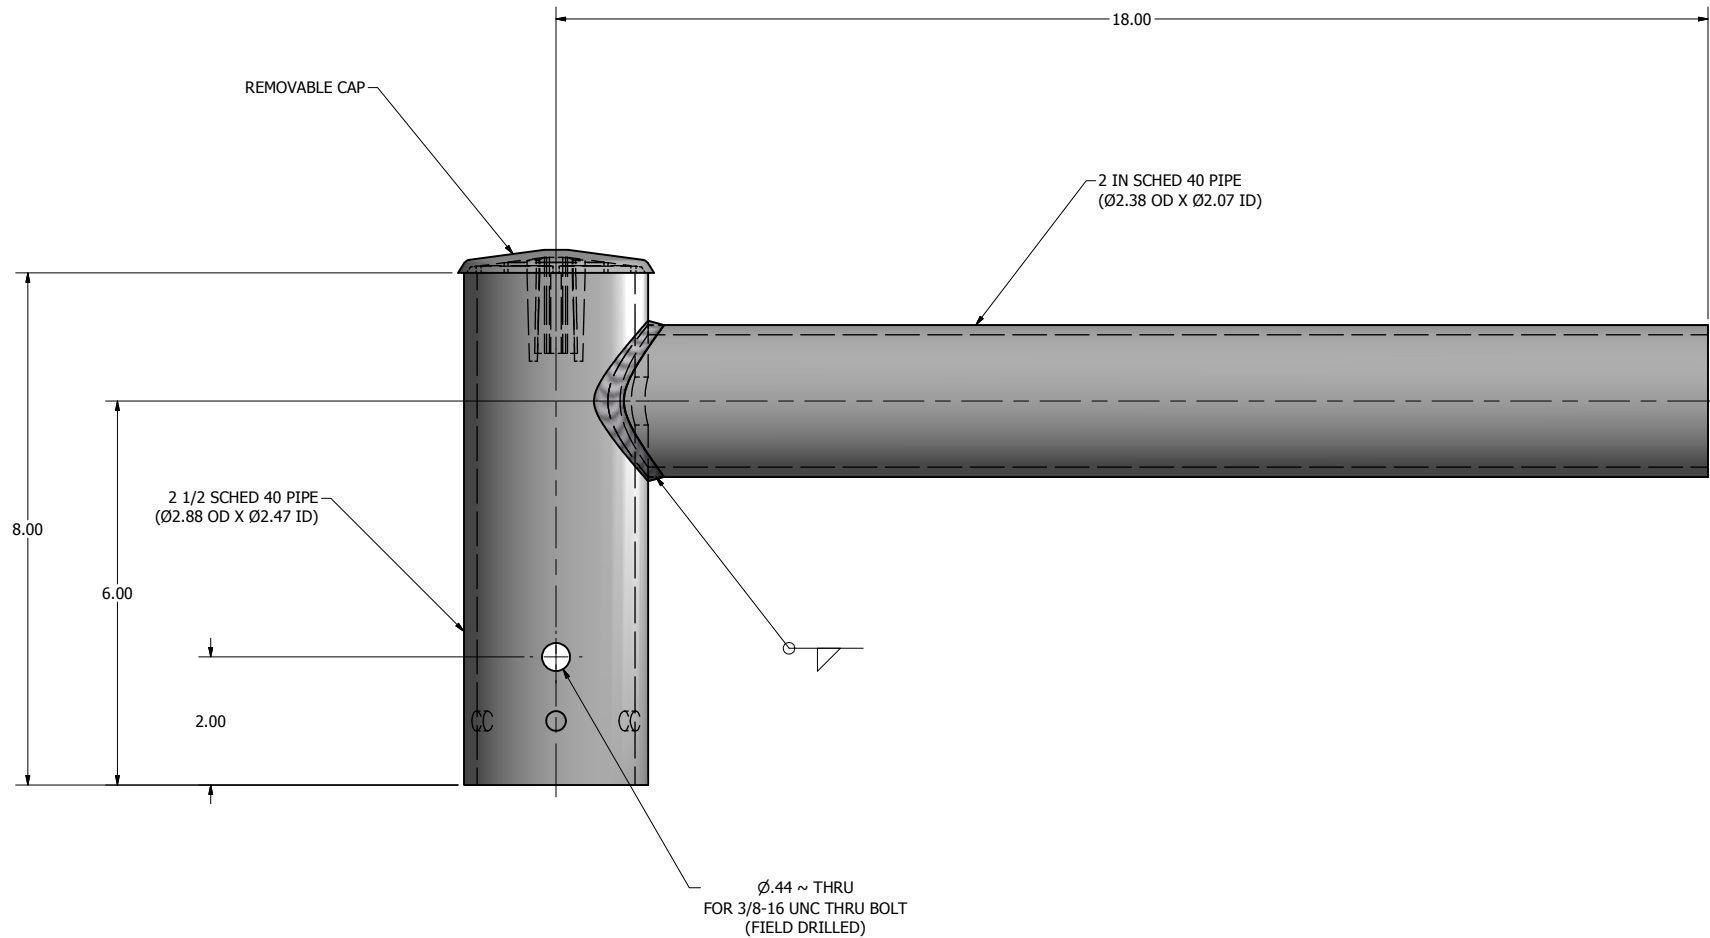

NOTE: SB SERIES POLE TOP MOUNTING BRACKETS SLIP FIT 2 IN PIPE TENONS (Ø2.38 OD). BRACKET ARMS ARE CONSTRUCTED OF 2 IN PIPE. BRACKETS ARE FINISHED TO MATCH POLE.

BRACKETS CATALOGED ARE CONSTRUCTED OF STEEL AND ARE DESIGNED FOR USE WITH STEEL OR ALUMINUM POLES. IF ALUMINUM BRACKETS ARE REQUIRED FOR ALUMINUM POLES, CONTACT YOUR REPRESENTATIVE.

| | | | | | | | | |
|------------------|-------------------|-------------|--|---|---------|---|--|--|
| <p>HAND HOLE</p> | DRAWN: M. HARVALA | 2/9/2015 | <p>UNITED LIGHTING STANDARDS A DWM COMPANY</p> | 23171 Groesbeck Hwy. Warren, MI 48089 P: (586) 774-5650 F: (586) 774-5706 www.unitedlightingstandards.com | | SOME GEOGRAPHICAL AREAS HAVE SPECIAL WIND CONDITIONS THAT CAN CREATE WIND INDUCED VIBRATIONS CAUSING A FATIGUE PROBLEM. NO METHOD HAS YET BEEN FOUND FOR PREDICTING DESTRUCTIVE LIGHTING POLE VIBRATION. THESE CONDITIONS ARE UNIQUE AND CANNOT BE GUARANTEED AGAINST, AND ARE THE RESPONSIBILITY OF A LOCAL SITE ENGINEER. | | |
| | CHECKED | | | | TITLE: | | | |
| | REVISION: | | | DATE: | | | | |
| | APPROVED: | | | | | | | |
| | QUOTE: | | | | | | | |
| | S.O.# | | | | | | | |
| REF: | | SCALE: NONE | | CATALOG: | | | | |
| | | | | DWG NO: SB-19 | SIZE: C | SHEET 1 OF 1 | | |