
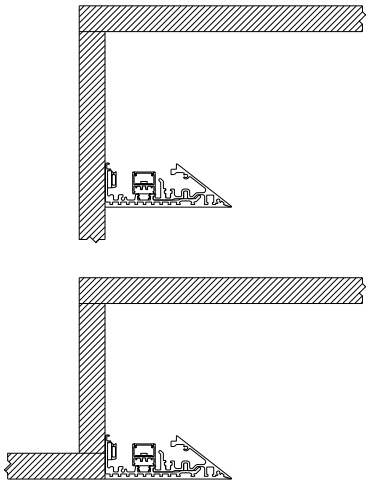


# 20 Mini Edgeless Cove



Gypsum Ceiling Mounting Options.  
4" minimum offset, 12" typical offset.  
Can be installed in Cove or Coffin.

## Ordering Information

WG-20MEC	RPT						SD		
Model	Fixation	Pattern	Length	Power <sup>1</sup>	CRI/ CCT <sup>2</sup>	Driver <sup>3</sup>	Lens	Finish	Options
WG-20MEC	RPT	S <sup>1</sup> PC <sup>2</sup> PR <sup>2</sup> PZ <sup>2</sup>	A A x B A x B x C A x B x A x B	L M	927 930 935 940	X S D010 L3DAE L3DOE DFPN	SD (std)	W (std) B G F	CDC

## Luminaire

- Continuous, evenly illuminated snap-in lens without visible LED pattern.
- Continuous mounting to any desired length (within 1/4").
- Satin Diffuser (standard) for maximum efficiency and spot free lens.
- Lengths and angles factory cut to exact field dimensions.
- Standard and custom corners.
- Field replaceable LED boards.

## Fixation

- RPT = Recessed plaster trim

## Pattern

- S = Straight run<sup>1</sup>
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PZ = Non-standard patterns and/or corners other than 90°, consult factory<sup>2</sup>

## Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

## LED<sup>3</sup>

- L = 3.2W/ft low power (24V)
- M = 6.4W/ft medium power (24V)

## Color/Lumens<sup>4</sup>

90+ CRI minimum (Low/Mid)

- 927 = 2700K, (224/413 lm/ft)
- 930 = 3000K, (231/426 lm/ft)
- 935 = 3500K, (235/435 lm/ft)
- 940 = 4000K, (238/439 lm/ft)

## Driver (remote)<sup>5</sup>

- X = No driver, ordered separately
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC

## Lens

- SD = Satin clear diffuser (standard)

## Finish

- W = White, 20% gloss, RAL9010 (standard)
- B = Black, 20% gloss
- G = Gray, 20% gloss
- F = Custom finished trim, specify RAL

## Options

- CDC = Clear dust cover

## Emergency

- Emergency LED driver available, order separately.

- Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options
- See pattern spec sheet.
- Wattage shown does not include power supplies/drivers.
- Delivered lumens with satin clear diffuser shown.
- See power supply spec sheet.