





20 Linear Perimeter Regressed Narrow Lens

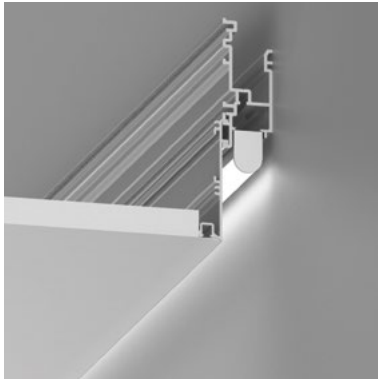


Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)



Recessed Return Trim (RRT)



Recessed Grid Trim (RGT9/RGT15)

Ordering Information

Model	Fixation	Pattern	Length	Power ¹	CRI/CCT ²	Driver ³	Lens	Finish	Options
WG-20LPR	RPT RBT RRT RGT9 RGT15	S	A	L M	927 930 935 940	X S D010 L3DAE L3DOE DFPN	NL16	W (std) B G F	BEC FEC PEC

Luminaire

- Continuous, Narrow Lens regressed to the ceiling plane.
- Opal Diffuser for even illumination and no LED appearance. Satin diffuser for high efficiency and minimum LED appearance.
- Field replaceable LED boards.
- 90+ CRI, 3 steps MacAdam.
- Lengths factory cut to exact field dimensions specified to 0.25".
- Supplied with 4' class 2 plenum rated feed cable per fixture lengths.

Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim
- RRT = Recessed Return Trim
- RGT9 = Recessed Grid Trim 9/16"
- RGT15 = Recessed Grid Trim 15/16"

Pattern

- S = Straight run (light insert provided in stand alone units up to 96").

Length

- A = specify inches to the nearest 0.25" (i.e. 72.25")

Power¹

- L = 3.2W/ft low power (24V)
- M = 6.4W/ft mid power (24V)

CRI/CCT²

- 90+ CRI (low/mid power)
- 927 = 2700K, (225/415 lm/ft)
 - 930 = 3000K, (232/429 lm/ft)
 - 935 = 3500K, (237/437 lm/ft)
 - 940 = 4000K, (239/442 lm/ft)

Driver (remote)³

- X = No driver, ordered separately
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC

Lens

- NL16 = Linear narrow lens, 16 degree

Finish

- W = White, 20% gloss, RAL9010 (standard)
- B = Black, 20% gloss
- G = Gray, 20% gloss
- F = Custom finished trim, specify RAL

Options

- BEC = Bezel end caps
- FEC = Flat end caps
- PEC = Plaster-in end caps

Emergency

- Emergency LED driver available, order separately.

¹ Wattage shown does not include power supplies/drivers.

² Delivered lumens with narrow lens shown.

³ Remote power supply required. See power supply page for details.

