


# Mini Box Cove LED

Submittal

Project Name \_\_\_\_\_ SO # \_\_\_\_\_


Pattern - 3 Sided Coffer Corner

Fixture Type \_\_\_\_\_ PO# \_\_\_\_\_

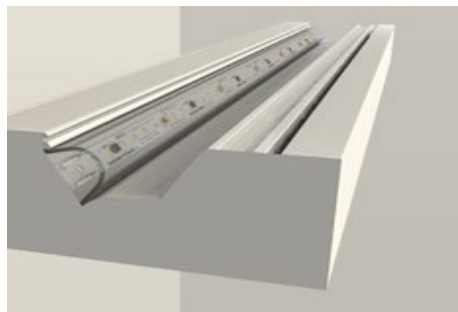

## Ordering Information

| WG-MBC | PC              |           |                  |  |                                    |   |                     | SM    |                      |
|--------|-----------------|-----------|------------------|--|------------------------------------|---|---------------------|-------|----------------------|
| Model  | Type            | Length    | LED <sup>3</sup> | Color  | Voltage                            | Power                                   | Diffuser            | Mount | Options <sup>2</sup> |
| WG-MBC | PC <sup>2</sup> | A x B x C | L<br>M<br>H      | 827<br>830<br>835<br>840<br>927<br>930<br>935<br>940 | UNV<br><br><br><br><br><br><br>120 | S<br>D010<br>D3W<br>DES<br><br><br>DFPN | S (STD)<br>OF<br>SF | SM    | LEC<br>REC<br>LREC   |

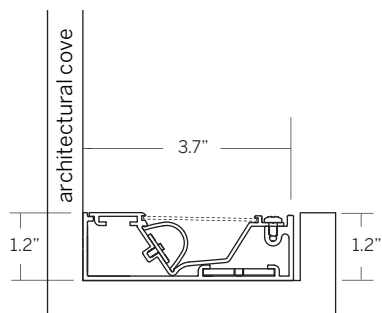

## Luminaire

- Indirect cove system featuring clean box profile for continuous lighting inside coves or as stand alone cove system.
- White LED light source.
- Lengths and angles factory cut to exact field dimensions.
- Powder coat painted white - RAL 9010.
- Snap-on satin diffuser optimized for forward distribution (standard).

## Type

- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners<sup>2</sup>

## Length

- A, B, C = specify feet & inches to the nearest 0.25" (i.e. 6' 5.5")

## LED<sup>3</sup>

- L = Low Power (3W/ft)
- M = Mid Power (6W/ft)
- H = High Power (10W/ft)

## Color

80+ CRI minimum

- 827 = 2700K
- 830 = 3000K
- 835 = 3500K
- 840 = 4000K
- For 90+ CRI specify 927, 930, etc

## Voltage

- UNV = 120-277V
- 120 = 120V (DFPN only)

## Power Supply (remote)

- S = Standard driver, 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- D3W = Lutron, 1%, 3-wire fluorescent dimming, 120-277V
- DES = Lutron, 1%, EcoSystem E1/E2 digital dimming, 120-277V
- DFPN = Lutron 1% forward phase with neutral, 120V only

## Diffuser

- S = Snap-on satin diffuser (standard)
- OF = Opal flat diffuser
- SF = Satin flat diffuser


## Mounting

- SM = Surface

## Options<sup>2</sup>

- LEC = Left end cap
- REC = Right end cap
- LREC = Left & Right end caps
- Contact factory for emergency lighting options

- 1 Standard setup assumes the cove ends at a perpendicular wall and the led board is set back from the end to minimize light on the perpendicular wall. Contact us for options.
- 2 See pattern specs sheet.
- 3 Wattage shown does not include power supplies/drivers.

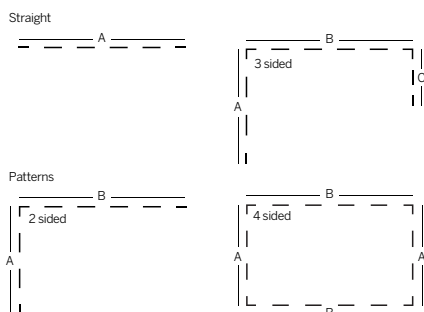

## Customer Approval

☐

Approved

☐

Approved corrections noted

☐

Revise and Resubmit

Company \_\_\_\_\_

Signature \_\_\_\_\_

Print Name \_\_\_\_\_

Date \_\_\_\_\_

Original Submission Date \_\_\_\_\_

# Mini Box Cove LED

Submittal

Project Name \_\_\_\_\_ SO # \_\_\_\_\_

Pattern - 3 Sided Coffered Corner

Fixture Type \_\_\_\_\_ PO# \_\_\_\_\_

| System | Qty.  | Overall Length |       |       |
|--------|-------|----------------|-------|-------|
|        |       | 'A'            | 'B'   | 'C'   |
| 1      | _____ | _____          | _____ | _____ |
| 2      | _____ | _____          | _____ | _____ |
| 3      | _____ | _____          | _____ | _____ |
| 4      | _____ | _____          | _____ | _____ |

## Customer Approval

☐

Approved

☐

Approved with  
corrections noted

☐

Revise and Resubmit

Company \_\_\_\_\_

Signature \_\_\_\_\_

Print Name \_\_\_\_\_

Date \_\_\_\_\_

\*overall length of finished mounting surface

