





#### **USE OF PRODUCT**

The 4" Prime Adjustable Series Downlight is the ideal product for architectural energy efficient lighting in commercial and residential applications where adjustability is required. Available in an assortment of color temperatures, optics, lumen outputs, and dimmable driver options.

#### LED ENGINE

LED engine available with CREE LEDs in 2700K, 3000K, 3500K, or 4000K in standard 93+ CRI. 2 Step MacAdam ellipse allows for color consistency between fixtures. LED mounted to aluminum heat sink for maximum life output and thermal management. Light engine provides a quick disconnect with locking strain relief to housing.

#### FRAME CONSTRUCTION

Constructed from 16 gauge heavy duty powder coated cold rolled steel frame with a large access junction box.

#### **ADJUSTMENT**

Light engine allows for hot aiming from 0-35º. Housing provides for 360º locking rotation Aperture collar adjusts 15º ± horizontally within frame for square ceiling alignment

Collar notch allows for easy alignment for square applications.

Aperture collar compatible up to 1 1/2" ceiling thickness. Accommodation for 2" or 3" ceiling thickness available upon request.

#### **OPTICS**

Field replaceable optical lens available in 18º, 30º, 50º, and 80°. Easily achieve narrow spot to wide flood beam pattern. Option for frosted, honeycomb, or solite filter (2 maximum).

#### DIMMING

Available in 8 driver selections. (ID) Standard all-inclusive ELV, Triac, and 0-10V dimming driver called Intelligent Drive, 120-277V. (PEQ0) Lutron Hi-Lume Premier Ecosystem 0.1% w/soft on, fade to black dimming, 120-277V. (LDE1) Lutron Hi-Lume 1% Ecosystem with soft on, fade to black dimming, 120-277V. (LTE) Lutron Hi-Lume 1% 2-wire, 120V. (L3DA) Hi-lume 1% EcoSystem/3-Wire L3D Driver (EEI) eldoLED Eco 1% Dim (0-10V), 120-277V. (EDIO) eldoLED Solo 0.1% Dim(0-10V), 120-277V. (EDID) eldoLED Solo 0.1% Dim(DALI), 120-277V.

#### THERMAL MANAGEMENT

Ambient temperatures at fixture location should not exceed -20° to 40°C

#### **EMERGENCY BATTERY**

Optional emergency battery available for a minimum of 90 minutes with both integral or remote test switch in 800 or 1700 delivered lumens.

#### TRIM OPTIONS

- All trims are self flanged die cast or anodized.
- Trim includes standard frosted acrylic diffuser.
- 12% lumens increase if remove standard frosted acrylic diffuser in field.
- Optical Enhancer reflects light evenly across the diffusion lens.
- Trims available in round or square in an assortment of standard or made to order finishes.

#### LABELS/COMPLIANCE/WARRANTY

- CSA Listed for US and Canada
- Energy Star
- Dry/Damp/Wet location rated.
- Title 24, JA8 Compliant
- 5 Year limited warranty













# ORDERING INFORMATION

Series	Apperture Size	Lumens	Color Temperature	Voltage	Dimming	Optical Lens	Filter
RPA PRIME Series	4 - 4"	10L <sup>1</sup> - 1055 lm 12L <sup>1</sup> - 1250 lm 16L <sup>1</sup> - 1645 lm 21L <sup>1</sup> - 2170 lm 25L <sup>1</sup> - 2495 lm 31L - 3105 lm 34L - 3475 lm 40L - 4030 lm	<b>27</b> - 2700K <b>30</b> - 3000K <b>35</b> - 3500K <b>40</b> - 4000K	UNV - 120-277 120 - 20V 347 <sup>2</sup> - 347V	ID <sup>3</sup> Standard all-inclusive ELV, Triac, and 0-10 dimming driver (Intelligent Drive)  PEQ0 <sup>4</sup> Lutron Hi-Lume Premier Ecosystem 0.1% soft on, fade to black dimming Lutron Hi-Lume 1% Ecosystem with soft of fade to black dimming Lutron Hi-Lume 1% 2-wire L3DA Hi-lume 1% Ecosystem/3-Wire L3D Driver ELIOA eldoLED Eco 1% Dim (0-10V)  EDIO <sup>6,7,8</sup> eldoLED Solo 0.1% Dim (0-10L)	30 - 30° 50 - 50° 80 - 80°	None - Leave blan F - Frosted filter H - Honey comb S - Solite filter

## **Housing Type**

NC - Non-IC New Construction

IC10 - Air-tight New Construction

### Aperture

RFA - Round Flanged Adjustable

### Frame Accessories

C - C-Channel bar hanger

B - Flat bar hanger

WJ1 - Wood Joist

### Collar

Options

WL - Wet Location

Blank - 1.5" Depth

**20** - 2" Depth 30 - 3" Depth

MTO - Made to order

### Options

EI8 - Emergency battery with integral switch(800 Lumens)

ER8 - Emergency battery with remote switch (800 Lumens)

EI17 - Emergency battery with integral switch(1700 Lumens)

FCJS-E - Vive wireless individual controller(Ecosystem)

FCJS-0 - Vive wireless individual controller(0-10)

### TRIM ORDERING INFORMATION

Aperture Size / Shape / Trim Type / Style

4RFO - 4" Round Flange Open 4RFA - 4" Round Flange Accent

### **Bevel / Flange Finish**

W-W - White bevel / white flange

H-W - Haze bevel / white flange

B-B - Black bevel / black flange H-H - Haze bevel / Haze flange

S-S - Specular clear bevel / Specular clear flange

S-W - Specular clear bevel / white flange

**WE-WE** - Wheat bevel / wheat flange

MTO - Made to order

ER17 - Emergency battery with remote switch (1700 Lumens)

CP10 - Chicago Plenum

1. Compatible with IC new construction housing.

2. Step down transformer required.

Intelligent Drive is the standard driver
 Driver must not exceed 1645 lm

5. 120V only.

Inapplicable to 4030 Lumen offering.
 Must specify logarithmic or linear eldoLED diver.

8. Confirm dimming curve: linear or logarithmic

Without standard frosted acrylic diffuser.

10. Compatible up to 2170 lum



Integer Lights continually works to improve products and reserves the right to make changes which may alter the performance, appearance or specification of products.




### **LUMEN CHART**

Wattage	Delivered Lumens	Voltage	CRI
11W	1055 lm	120 - 277V	93+
16W	1250 lm	120 - 277V	93+
20W	1645 lm	120 - 277V	93+
30W	2170 lm	120 - 277V	93+
31W	2495 lm	120 - 277V	93+
38W	3105 lm	120 - 277V	93+
45W	3473 lm	120 - 277V	93+
58W	4030 lm	120 - 277V	93+


# **MULTIPLIERS**

Color Temperature	Lumen Multiplier
2700K	0.93
3000K	1.00
3500K	1.07
4000K	1.15


# **TRIM DIMENSION**

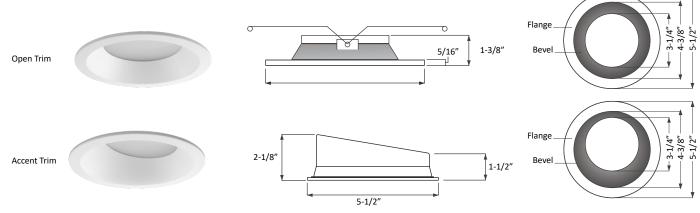

# **LED HOLDER & FILTER DIMENSION**

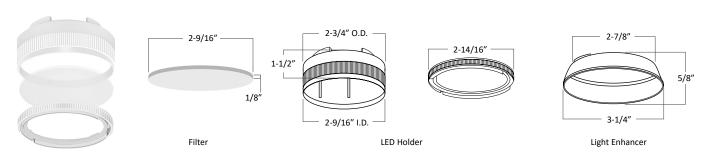

# **HOUSING DIMENSION**

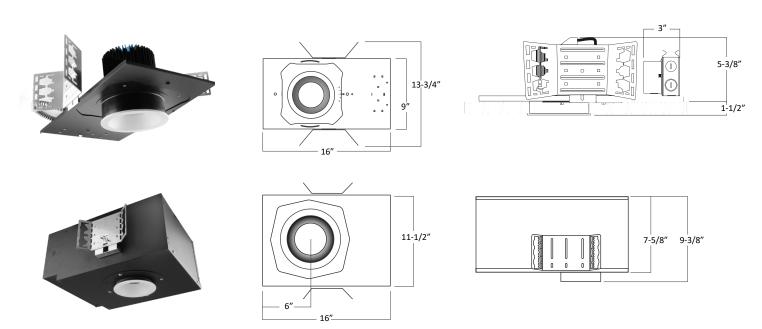




<sup>\*</sup>Above chart, ordering information, and IES File name reflect delivered lumens based 3000K and 30° optical lens.
\*\*Lumens will vary based on CCT, optical lens, and bevel finish.



# **COLLAR DEPTH PER CEILING THICKNESS**



# **FRAME ACCESSORIES**

