


# AX2WUD LED 2" Wall Mount Architectural Up/Down



CATALOG #: \_\_\_\_\_

TYPE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

## FEATURES

- Sleek, linear, ADA Compliant design incorporates clean lines and slim styling
- Slightly wrapped lens creates glowing edge and smooth illumination
- Attractive source of direct and indirect lighting for use in offices, hallways, conference rooms and medical facilities
- Suspended and wall mount styles add design flexibility and continuity
- Available with Avi-on wireless fixture controls
- Made Right Here® in the USA



ORDERING EXAMPLE: AX2WUD - 4 - L33/835U/L33/835D - S - OPTIONS - CONTROL/DIM - UNV

## ORDERING INFO

SERIES	LENGTH	LUMEN PACKAGE (EXAMPLE: L33/835U/L33/835D)				FIXTURE TYPE
AX2WUD	4 4'	Specify lumen packages: U for Uplight and D for Downlight				F Electrical feeder unit <sup>[1]</sup>
	8 8'	LUMENS <sup>[4]</sup>	CRI	CCT	U or D	J Joiner unit <sup>[2]</sup>
		4'	8 80	27 2700K	U Uplight	S Stand-alone unit <sup>[3]</sup>
		L16 1,600lm	9 90 <sup>[5]</sup>	30 3000K	D Downlight	
		L24 2,400lm		35 3500K		
		L33 3,300lm		40 4000K		
		8'		50 5000K		
		L33 3,300lm				
		L50 5,000lm				
		L66 6,600lm				

## SPECIFICATIONS

- HOUSING – Extruded aluminum.
- SHIELDING – Frosted acrylic lens.
- FINISH –Matte, smooth silver sparkle (ALUM) standard. All other colors default to textured finish. Polyester powder coat bonded to phosphate-free, multi-stage pretreated metal. All parts painted after fabrication to facilitate installation, increase efficiency, and inhibit corrosion.
- ELECTRICAL – High-quality mid-power LED boards. L70 at 60,000 hours per IES TM-21.
- MOUNTING – Wall.
- LISTINGS –
  - cCSAus certified as luminaire suitable for dry or damp locations.
  - ADA Compliant
  - Complies with the Buy American Act and other federal regulations. Request certification at [hew.com/baa](http://hew.com/baa).
- WARRANTY – 5-year limited warranty, see [hew.com/warranty](http://hew.com/warranty).

## OPTIONS <sup>[6]</sup>

**EM/10WRM (L\_\_)** Remote mount 10-watt emergency battery  
Additional lower lumen packages available. <sup>[8]</sup>  
Example: 3,000 nominal lumens =  
AX2WUD-4-L33/835U/L33/835D-S-(L30)

## CONTROL <sup>[7]</sup>

– None  
**AVI-LVFA** Avi-on wireless fixture control. Up and down switch together. <sup>[9]</sup>  
**AVI-LVFA-CS2-PIR** Avi-on wireless fixture control with PIR motion and daylight sensor. Up and down switch together. <sup>[10]</sup>  
**AVI-LVFAU/D** Avi-on wireless fixture control. Up and down switch separately. <sup>[11]</sup>  
**AVI-LVFAU/D-CS2-PIR** Avi-on wireless fixture control with PIR motion and daylight sensor. Up and down switch separately. <sup>[12]</sup>

## DRIVER <sup>[13]</sup>

**DIM** Up and down switch and dim together  
**DRV** Non-dimming, up and down switch together  
**DA** Driver with 12V auxiliary power, without external dimming wires. Up and down switch together. <sup>[14]</sup>  
**DAU/D** Driver with 12V auxiliary power, without external dimming wires. Up and down switch separately. <sup>[15]</sup>

## VOLTAGE

**120** 120V  
**277** 277V  
**UNV** 120-277V



## NOTES

- Quick-connect wiring harness, two end plates, field installed.
- Quick-connect wiring harness, no end plates
- Two end plates installed
- Lumens based on 80 CRI/3500K CCT. Actual lumens may vary +/-5%, additional lumen packages available, see options.
- Extended lead times may apply. Consult factory for availability.
- See page 3 for FINISH OPTIONS.
- Sensor recommended for use in downlight orientation only. See page 3 for SENSOR PLACEMENT DETAILS. See page 4 for AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS.
- Specify in increments of 100 nominal lumens. Option must be specified with next higher lumen package.
- DA and DAU/D Drivers only.
- DA and DAU/D Drivers only.
- DA and DAU/D Drivers only.
- DA and DAU/D Drivers only.
- Not available with DIMU/DIMD. See page 3 for ADDITIONAL DRIVER OPTIONS.
- Avi-on Controls only.
- Avi-on Controls only.




# AX2WUD LED

## 2" Wall Mount Architectural Up/Down

### PHOTOMETRY

AX2WUD-4-L33/835U/L33/835D-S-ASY-DIMU/DIMD-UNV Report #: 18756.0; 03/18/15 | Total Luminaire Output: 5789 lumens; 82.8 Watts | Efficacy: 69.9 lm/W | 84.5 CRI; 3514K CCT

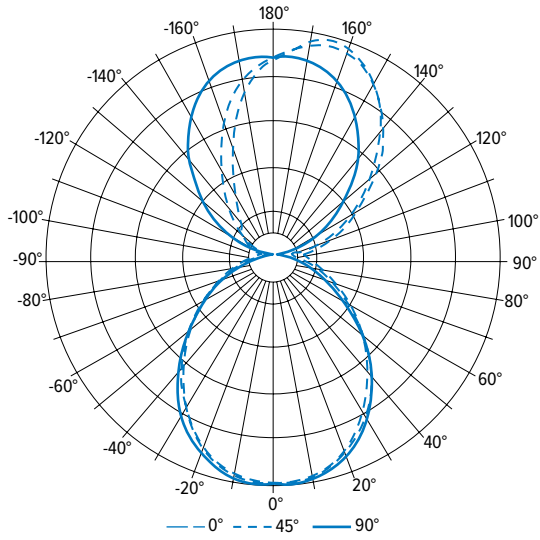

VERTICAL ANGLE	HORIZONTAL ANGLE					ZONAL LUMENS
	0°	45°	90°	135°	180°	
0	1251	1251	1251	1251	1251	
5	1250	1252	1257	1235	1251	119
15	1187	1195	1206	1185	1188	336
25	1056	1068	1096	1054	1048	494
35	872	916	921	881	863	559
45	695	700	706	680	661	524
55	509	501	477	472	474	431
65	363	344	283	300	315	311
75	244	209	120	162	192	188
85	169	105	16	60	82	87
90	160	94	0	37	61	
95	219	156	38	58	94	113
105	333	280	142	104	131	199
115	483	442	277	165	170	295
125	651	616	454	234	213	393
135	844	802	623	344	258	457
145	1000	1002	803	479	348	473
155	1146	1133	947	666	529	420
165	1199	1173	1043	870	767	290
175	1104	1105	1077	1026	986	102
180	1067	1067	1067	1067	1067	

LUMEN SUMMARY	ZONE	LUMENS	% FIXTURE
	0 - 30	949	16
	0 - 40	1508	26
	0 - 60	2463	43
	0 - 90	3048	53
	90 - 120	606	11
	90 - 150	999	17
	90 - 180	1929	33
	0 - 180	5789	100

### MOUNTING DETAILS


#### SIDE VIEW




NOMINAL LENGTH	ACTUAL LENGTH (A)
4'	48-1/16"
8'	91-1/8"

#### MOUNTING


J-Box (not provided) mounted **horizontally** (if attaching to existing vertical J-box, J-box cover will be partially visible below fixture).

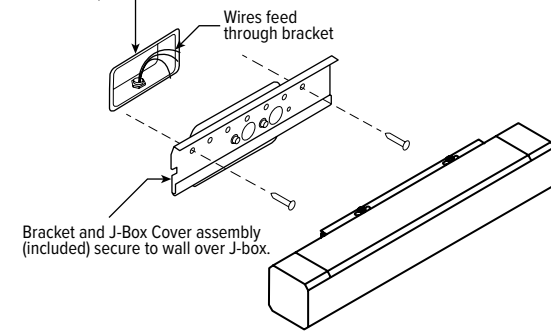

#### CONTINUOUS ROW FIXTURES




#### ROW MOUNTING

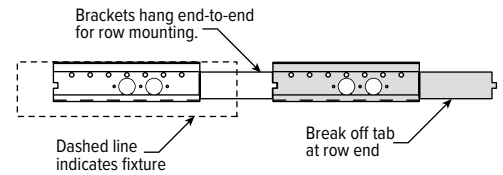

### FIXTURE DETAILS


#### EM/10WRM

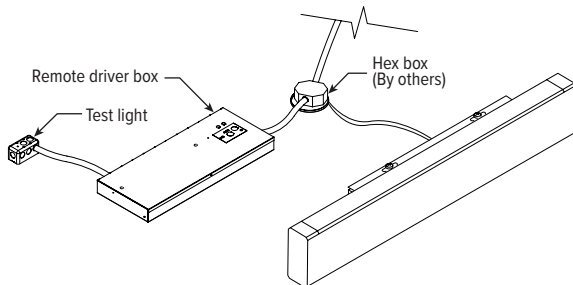

# AX2WUD LED

## 2" Wall Mount Architectural Up/Down

### FINISH OPTIONS

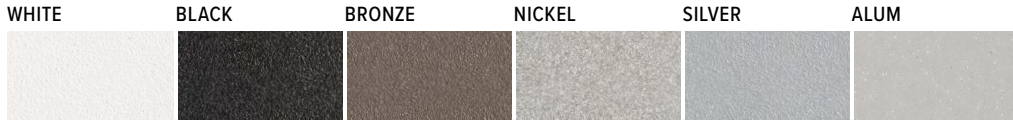


For custom color, please specify RAL code or a manufacturer code with description. All custom colors other than RAL require two sample swatches, minimum 1" square.

### ADDITIONAL DRIVER OPTIONS

Note: Lumen restrictions apply, consult product builder at [hew.com/product-builder](http://hew.com/product-builder).

CATALOG NUMBER	DESCRIPTION
DRV	Driver prewired for non-dimming applications; entire fixture switches together
DIM	Dimming driver prewired for 0-10V low voltage applications; entire fixture switches and dims together
DRVU/DRVD	Driver prewired for non-dimming applications; up and down portions switch separately
DRVU/DIMD	Driver prewired for non-dimming applications; up and down portions switch separately; 0-10V on down portion only
DIMU/DRVD	Up and down portions switch separately; dimming driver prewired for 0-10V low voltage applications on up portion only
DRVDIMU	Entire fixture switches together; dimming driver prewired for 0-10V low voltage applications on up portion only
DRVDIMD	Entire fixture switches together; dimming driver prewired for 0-10V low voltage applications on down portion only
DIM1	1% dimming driver prewired for 0-10V low voltage applications
DIM LINE	Line voltage dimming driver (TRIAC and ELV compatible, 120V only)
DIM TRC	Line voltage dimming driver (TRIAC compatible, 120V only)
DIM LINEU/DIM LINED	Line voltage switching and line voltage dimming; up and down portions switch separately
DIM LINEU/DRVD	Up and down portions switch separately; line voltage dimming on up portion only
DRVU/DIM LINED	Up and down portions switch separately; line voltage dimming on down portion only
DA	Driver with 12V auxiliary power, without external dimming wires. Up and down switch together.
DAU/D	Driver with 12V auxiliary power, without external dimming wires. Up and down switch separately.

### SENSOR PLACEMENT DETAILS



SEE NEXT PAGE FOR CONTROL DETAILS.



# AX2WUD LED 2" Wall Mount Architectural Up/Down

## AVI-ON BLUETOOTH WIRELESS CONTROL DETAILS

### FEATURES

#### Simple

- Gateway-free distributed control
- Factory pre-commissioning
- Contractor friendly installation
- Occupancy/vacancy/daylight sensing

#### Scalable

- Virtually unlimited network size
- Spans small offices to large warehouses
- Flexible control strategies

#### Secure

- Optional cloud connectivity
- UL IoT platinum security rating
- DLC 5.0 compliant

### DIGITAL INSTALLATION TOOLS

Avi-On mobile apps provide intuitive, quick installation and commissioning. Pro tools are available to qualified installers.



Commissioning Mobile App




Zone Scanner Web App



Commissioning Pro App

### SYSTEM COMPONENTS

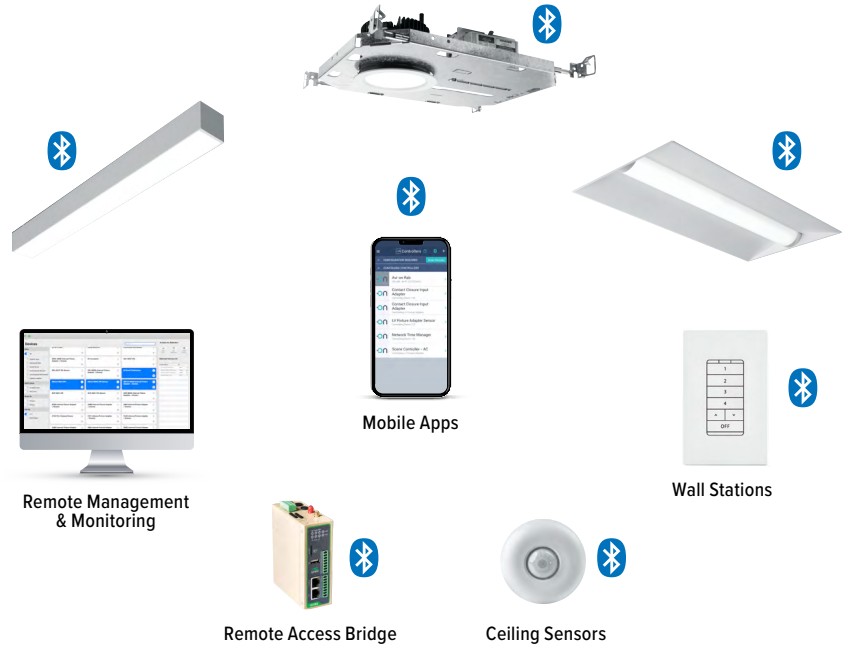

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Avi-on is under license. Other trademarks and trade names are those of their respective owners.

### ACCESSORIES

WALL STATIONS	
AVI-2401AC	Scene controller - numbered 1-4, 120-277VAC
AVI-2402BAT	Scene controller - numbered 1-4, battery powered
AVI-2401AC-2	Dimmer with presets - percentages, 120-277VAC
AVI-2402BAT-2	Dimmer with presets - percentages, battery powered
AVI-2401AC-3	On/off/dimming, 120-277VAC
AVI-2402BAT-3	On/off/dimming, battery powered

NETWORK	
AVI-RAB-LTE	Remote access bridge – LTE connection
AVI-2001RAB-01-C	Remote access bridge – Wifi connection
AVI-KIT-NTM	Network time manager with battery backup

CEILING MOUNT SENSORS	
AVI-KIT-SEN-DUCM	PIR motion and ultrasonic sensor kit
AVI-KIT-SEN-ICM	PIR motion and photocell sensor kit

For load controllers and additional accessory info, see [hew.com/avi-on](http://hew.com/avi-on)



**AVI-LVFA-CS2-PIR** Avi-on wireless fixture control with PIR motion and daylight sensor. Up and down switched together. DA Driver only.

**AVI-LVFAU/D-CS2-PIR** Avi-on wireless fixture control with PIR motion and daylight sensor. Up and down switched separately. DA Driver only.

SPECIFICATIONS	
TYPE	PIR Motion + Daylight
MOUNTING HEIGHT	8' – 10'
DETECTION ANGLE	360°
TEMPERATURE RANGE	-30° to 50°C
RELATIVE HUMIDITY	10 to 80% non-condensing
IP RATING	IP20
MANUFACTURER	Avi-On

### SENSOR COVERAGE PATTERNS

#### Side View



### SENSOR DETAIL



Dimensions: 13/16" x 2-1/4"

