

CAT:	FEET:
------	-------

TYPE:	PROJECT:
-------	----------



A patented, ADA compliant, co-extruded bullnose step light with contrasting stripe or 100 % black (consult factory) and single or double row of LEDs.

Feature

- Softstep II Titanium Plus + Light Step is an illuminated, pliable bullnose designed for secure foot placement 3' - 12' lengths with a reflective edge for delineation and patrons' safety.
- An LED top and bottom row is recommended for 90° indoor steps more than 4' in length.
- Pre-cut and assembled according to specification.
- Optional illuminated row indicator is available (see Page 2).
- Matching field-cutttable wireway with contrasting grey stripe is available in 8' lengths.
- Soft-molded end caps complete the integrated system. Individually replaceable LED PCBs easily snap into Titanium modules for easy and economical maintenance.

Mounting

Easy glue and screw down installation with recommended construction adhesives.

Applications


Required for 90° indoor steps.
Available in custom lengths up to 12 feet.

Warranty

5 years



Profile Dimensions

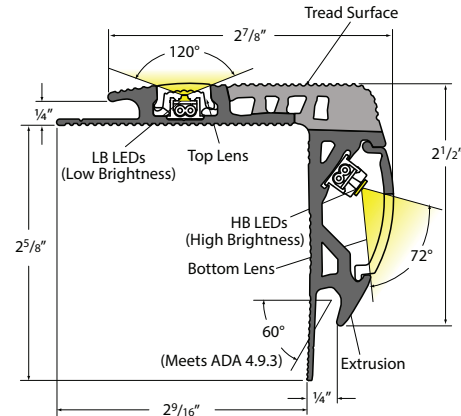


Technical Information

LED Spacing O.C. Step Top Row Indicator	4"	6"	9"	12"
Watts/ft	0.0072	0.0048	0.0026	0.0024

LED Spacing O.C. Bottom Row Illuminator	4"	6"	9"	12"
*Lumens/ft	16.2	10.4	6.4	4.4
*Watts/ft	0.65	0.44	0.28	0.22
*Lumen/watt	25			
CRI	>80/TYP83			
Kelvin Temp	1900K, 2700K, 3000K, 3500K, 4000K (+/-80K) 3SDCM, Red, Blue, Amber			
Rated Life	75,000 hrs.			
**Max Ordering Length	12'			
Order Increments	6"			
Operating Voltage	12V DC			
Power Supply	Class 2			
Dimmable	Yes			

* 3000K Sample
** Available in 6" increments up to 12'. Specify when ordering.

Required Field Conditions

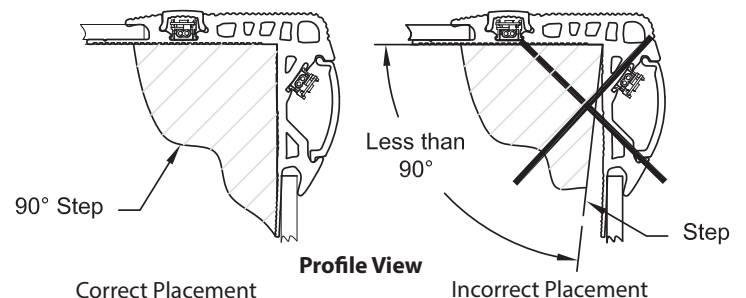

Note: If step riser is not 90°, consult factory.

Recommended Power Supplies

ADUL - NON DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-D	Indoor / Damp	100-277V AC 5ø60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-D				2	2x60W	2x5A
	ADUL-240-3-5-12-D				3	3x60W	3x5A
	ADUL-320-4-5-12-D				4	4x60W	4x5A

ADUL - 0-10V DIMMING

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DOT	Indoor / Damp	100-277V AC 5ø60 HZ	12V DC	1	60W	5A
	ADUL-150-2-5-12-DOT				2	2x60W	2x5A
	ADUL-240-3-5-12-DOT				3	3x60W	3x5A
	ADUL-320-4-5-12-DOT				4	4x60W	4x5A

ADUL - DMX SINGLE ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-80-1-5-12-DIN	Indoor / Damp	100-277V AC 5ø60 Hz	12V DC	1	60W	5A
	ADUL-150-2-5-12-DIN				2	2x60W	2x5A
	ADUL-240-3-5-12-DIN				3	3x60W	3x5A

ADUL - DMX MULTI ADDRESS

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	CIRCUIT CAPACITY
ADUL Series Class 2 Transformer	ADUL-150-2-5-12-DIN-2	Indoor / Damp	100-277V AC 5ø60 Hz	12V DC	2	2x60W	2x5A
	ADUL-240-3-5-12-DIN-3				3	3x60W	3x5A
	ADUL-320-4-5-12-DIN-4				4	4x60W	4x5A

INFINITY - MLV / ELV / 0-10V / PWM / TRIAC

DESCRIPTION	CAT NO	APPLICATION	PRIMARY VOLTAGE	SECONDARY VOLTAGE	CIRCUIT BREAKERS	MAX LOAD	MIN LOAD	CIRCUIT CAPACITY
Infinity Series Class 2 Transformer	INF-J-30-1-2.5-12	Indoor / Outdoor	100 - 277V AC	12VDC	1	30W	3W	2.5A
	INF-J-60-1-5-12				1	60W	6W	5A
	INF-J-180-3-5-12				3	3x60W	3x6W	3x5A
	INF-J-300-5-5-12				5	5x60W	5x6W	5x5A

Recommended Dimmers

DIMMING - 0-10V

DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
0-10V Dimmer	DIM-LD-010	Indoor	12V/24V DC	12V/24V DC	30 mA max. output (sink only)

DIMMING - MLV


DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
MLV Dimmer	N-600	Indoor	120V AC	120V AC	450W
	N-1000				800W
	N-1500				1200W
	D-600				450W
	M-600				450W
	M-1000				800W

DIMMING - ELV


DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT VOLTAGE	MAX LOAD
ELV Dimmer	ME-600	Indoor	120V AC	120V AC	450W
	DE-300				300W

DIMMING - DMX


DESCRIPTION	CAT NO	APPLICATION	INPUT VOLTAGE	OUTPUT PROTOCOL	MAX UNIVERSE
DMX Controller	TVOQ-1-WH	Indoor	5V DC	DMX 512	1
	TVOQ-2-BK		6V DC		
	TVOQ-2-WH				
	TVOQ-10-BK-7		6-7V DC		2
	TVOQ-10-WH-7				



TVOQ-1-WH
WH (White only)



TVOQ-10-XX-7
XX = BK (Black), WH (White)



TVOQ-2-XX
XX = BK (Black), WH (White)

Ordering Information


PRODUCT CODE	LED SPACING	LED COLOR TOP ROW	LED COLOR BOTTOM ROW	END CAP LEFT	END CAP RIGHT	POWER FEED	EXT COLOR	*FIXTURE LENGTH
SP								
SP = Softstep II Titanium Plus +	04 = 4" O.C. 06 = 6" O.C. 09 = 9" O.C. 12 = 12" O.C.	NL = No LED 19 = 1900K 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K AM = Amber RD = Red BL = Blue	NL = No LED 19 = 1900K 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K AM = Amber RD = Red BL = Blue	S = Carpet to Edge C = Carpet to Carpet N = No End Cap	S = Carpet to Edge C = Carpet to Carpet N = No End Cap	L = Left R = Right	B = All Black T = Two Tone	3.0 = 3' 3.5 = 3.5' 4.0 = 4' 4.5 = 4.5' 5.0 = 5' 5.5 = 5.5' 6.0 = 6'

*Available in 6" increments up to 12'

Optional Row Indicator Information

*For ordering details see sample organizing chart below.

Figure (A) Example figure shows Row Indicators on middle staircase, steps 10, 13, and 16.

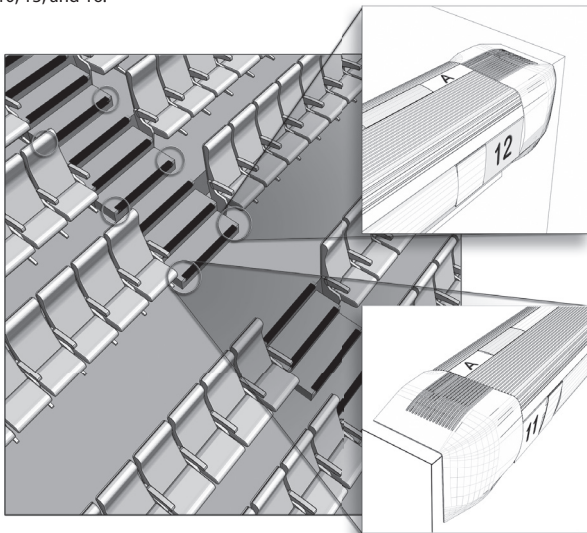

Character Designation

When selecting Row Indicators for your SoftStep II™ Titanium Plus + installation, here are some examples and guides to make your ordering process easier.

Within the figure (A) illustration we have offered an example spreadsheet to help organize your needs when designing row indicators into your venue. Your spreadsheet should reflect the call out and placement of each step by row and it's number that requires an indicator as shown in figure (A).

When looking at a seating layout from the stage or screen perspective, usually the first chair on the left side of the first row would be A1. In our illustration we have an orchestra pit section, so our Row A and seat 1 to 11 start on the isle. Seats A11 and A12 are separated by the middle staircase and reflect that design in the Row Indicators as shown.

With every venue, each auditorium has its own unique design parameters. To assist you, the SoftStep II™ Titanium Plus + row indicators offer THREE CHARACTER placements of any letter or number combination you desire. Defining those character call outs is as easy as listing them in a spreadsheet as shown in figure (B).

To help organize and clarify your need for row indicators, it is important to create a spreadsheet that reflects the placement of row indicators in your working drawings or blueprints. Our figure (A) example shows the placement of row indicators on steps 10, 13 and 16 in the middle staircase.


Figure (B)

SAMPLE ORGANIZING CHART							
PROJECT:		CUSTOMER:			INSTALLER:		
AUDITORIUM	STAIRCASE	STEP NUMBER	COLOR	UPPER LEFT	LOWER LEFT	UPPER RIGHT	LOWER RIGHT
3	MIDDLE	10	A	A	11	A	12
3	MIDDLE	13	A	B	11	B	12
3	MIDDLE	16	A	C	11	C	12

Row Indicator Ordering Information

PRODUCT CODE	OPTION	PLACEMENT	LED COLOR	ROW INDICATOR POSITION
SP	RI			
SP = Softstep II Titanium	RI = Row Indicator	BTH = Both LWR = Lower UPR = Upper	19 = 1900K 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K AM = Amber RD = Red BL = Blue	B = Both L = Left R = Right


Upper

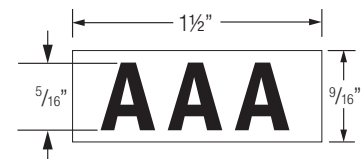


Lower




Mounting Accessories




ST-LENS-C-12
Clear top lens, 12'
ST-LENS-B-12
Bronze top lens, 12'
ST-LL-12
Lower lens, 12'
ST-BS-12
Base Extrusion 12', Grey Tread
ST-BS-BK-12
Base Extrusion 12', All Black




CARPET TO EDGE END CAP
ST-EC-L
Left End Cap
ST-EC-R
Right End Cap




WW-CC-BK-8
Carpet to Carpet Base and Cover 8' - Black
WW-CC-GY-8
Carpet to Carpet Base and Cover 8' - Grey
WW-CW-BK-8
Carpet to Wall Base and Cover 8' - Black
WW-CW-GY-8
Carpet to Wall Base and Cover 8' - Grey
WW-CW-BS-8
Base Only, Carpet to Wall, Black, 8'
WW-CC-BS-8
Base Only, Carpet to Carpet, Black, 8'
WW-TC-CL-8
Lens Cover Only, Clear, 8'
WW-TC-BK-8
Lens Cover Only, Black, 8'
WW-TC-BZ-8
Lens Cover Only, Bronze, 8'
WW-TC-GY-8
Lens Cover Only, Gray, 8'




WW-CE-BK-8
Carpet to Edge Base and Cover 8' - Black
WW-CE-GY-8
Carpet to Edge Base and Cover 8' - Gray
WW-CE-BS-8
Base Only, Carpet To Edge, Black, 8'
WW-TC-CL-8
Lens Cover Only, Clear, 8'
WW-TC-BK-8
Lens Cover Only, Black, 8'
WW-TC-BZ-8
Lens Cover Only, Bronze, 8'
WW-TC-GY-8
Lens Cover Only, Gray, 8'




BS-CC-8
Wall wireway, 8' Black Base & Conduit Cover



CARPET TO CARPET END CAP
ST-CC-EC-L
Left End Cap, Carpet-To-Carpet
ST-CC-EC-R
Right End Cap, Carpet-To-Carpet




STP-EXTNDR-12
SoftStep Landing Tread Extender, 12'



ST-R-12
Step Reducer, 12' (shown)
TM-3/16
Concrete Screw 3/16" x 1 1/4"
RONDB-5/32
Concrete Drill Bit 5/32" Dia




EXTRUSION ADHESIVE
ADH-MB-75AM-10
Extrusion adhesive, 10.1 oz tubes, sold individually. 30 per case.
ADH-MB-75AM-29
Extrusion adhesive, 29 oz tubes, sold individually. 12 per case.




END CAP ADHESIVE
ADH-5-CA
Clear liquid adhesive for end caps. 5 oz tube.


Replacement Parts




REPLACEMENT LED PCB (TOP ROW)
TT-LED-19
1900K
TT-LED-27
2700K
TT-LED-30
3000K
TT-LED-35
3500K
TT-LED-40
4000K
TT-LED-AM
Amber
TT-LED-BL
Blue
TT-LED-RD
Red




REPLACEMENT LED PCB (BOTTOM ROW)
TT-LED-19-B
1900K
TT-LED-27-B
2700K
TT-LED-30-B
3000K
TT-LED-35-B
3500K
TT-LED-40-B
4000K
TT-LED-AM-B
Amber
TT-LED-BL-B
BLUE
TT-LED-RD-B
Red



OPTIONAL ROW INDICATOR REPLACEMENT LAMP
RI-LED-19
1900K
RI-LED-27
2700K
RI-LED-30
3000K
RI-LED-35
3500K
RI-LED-40
4000K
RI-LED-AM
Amber
RI-LED-BL
Blue
RI-LED-RD
Red



REPLACEMENT STRAND WITH LED (Top Row)
TT-STP-04-STRD-XX
Replacement Strand - 4" O.C., Available in XX = 19/27/30/35/40/RD/BL/AM
TT-STP-06-STRD-XX
Replacement Strand - 6" O.C., Available in XX = 19/27/30/35/40/RD/BL/AM
TT-STP-09-STRD-XX
Replacement Strand - 9" O.C., Available in XX = 19/27/30/35/40/RD/BL/AM
TT-STP-12-STRD-XX
Replacement Strand - 12" O.C., Available in XX = 19/27/30/35/40/RD/BL/AM



REPLACEMENT STRAND WITH LED (Bottom Row)
TT-STP-04-STRD-XX-B
Replacement Strand - 4" O.C., Available in XX = 19/27/30/35/40/RD/BL/AM
TT-STP-06-STRD-XX-B
Replacement Strand - 6" O.C., Available in XX = 19/27/30/35/40/RD/BL/AM
TT-STP-09-STRD-XX-B
Replacement Strand - 9" O.C., Available in XX = 19/27/30/35/40/RD/BL/AM
TT-STP-12-STRD-XX-B
Replacement Strand - 12" O.C., Available in XX = 19/27/30/35/40/RD/BL/AM

TT-PH
Power harness with lead wire & crimp connector