

## Report of Test

**LLIA001159-006A**


Indoor Distribution Photometry Test Report

Catalog Number: MLR3-HO-K35-80-4-XX-AL1-UNV

Recessed ceiling mounted, extruded aluminum housing with steel endcaps, formed white enamel aluminum reflector, translucent white plastic enclosure.

144 white LEDs, One Osram PrevaLED Bar LED board.

One Osram Optotronic OTi 30/120-277/1A0 DIM-L G2 LED driver labeled as 620mA

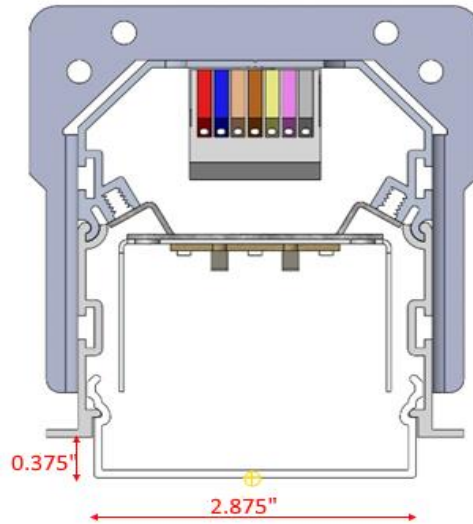

Prepared For:

Precision Architectural Lighting  
4830 Timber Creek Drive  
Houston, TX 77017, USA


| Performance Summary |          |                |                 |
|---------------------|----------|----------------|-----------------|
| Input Voltage       | 120.0 V  | Luminous Flux  | 3959.6 Lumens   |
| Input Current       | 0.2929 A | Total Efficacy | 113.8 Lm/W      |
| Input Power         | 34.78 W  | Downward Flux  | 3775.4 Lumens   |
| Frequency           | 60.00 Hz | Downward Flux  | 95.3 % of Total |
| Power Factor        | 0.990    |                |                 |
| Current THD         | 6.5 %    |                |                 |

This test report was issued by LightLab International Allentown, LLC without alterations or erasures.


Test date: 08/29/2019

Report date: 09/04/2019


Signed: \_\_\_\_\_



Report of Test  
LLIA001159-006A

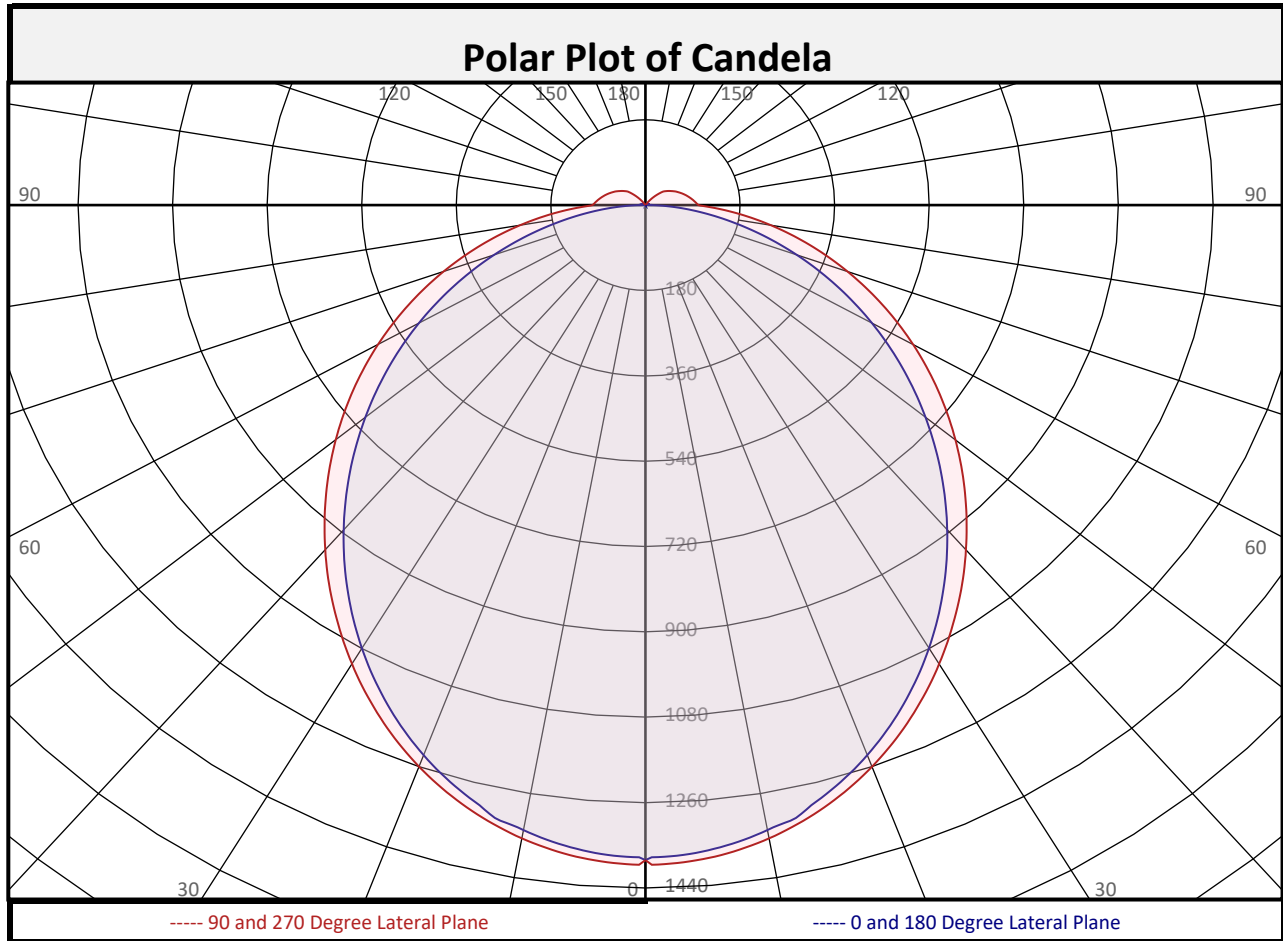

| Zonal Flux Summary |               |                  |  |                 |               |                  |  |                 |               |                  |
|--------------------|---------------|------------------|--|-----------------|---------------|------------------|--|-----------------|---------------|------------------|
| Zone (Deg Vert)    | Flux (Lumens) | Percent of Total |  | Zone (Deg Vert) | Flux (Lumens) | Percent of Total |  | Zone (Deg Vert) | Flux (Lumens) | Percent of Total |
| 0-10               | 130.2         | 3.3%             |  | 90-100          | 62.9          | 1.6%             |  | 0-20            | 497.5         | 12.6%            |
| 10-20              | 367.3         | 9.3%             |  | 100-110         | 51.4          | 1.3%             |  | 0-30            | 1040          | 26.3%            |
| 20-30              | 542.1         | 13.7%            |  | 110-120         | 37.0          | 0.9%             |  | 0-40            | 1674          | 42.3%            |
| 30-40              | 634.0         | 16.0%            |  | 120-130         | 23.2          | 0.6%             |  | 0-60            | 2891          | 73.0%            |
| 40-50              | 641.5         | 16.2%            |  | 130-140         | 8.9           | 0.2%             |  | 0-80            | 3638          | 91.9%            |
| 50-60              | 575.6         | 14.5%            |  | 140-150         | 0.8           | 0.0%             |  | 10-90           | 3645          | 92.1%            |
| 60-70              | 452.3         | 11.4%            |  | 150-160         | 0.0           | 0.0%             |  | 20-50           | 1818          | 45.9%            |
| 70-80              | 295.2         | 7.5%             |  | 160-170         | 0.0           | 0.0%             |  | 40-90           | 2102          | 53.1%            |
| 80-90              | 137.1         | 3.5%             |  | 170-180         | 0.0           | 0.0%             |  | 60-90           | 884.7         | 22.3%            |
| 0-90               | 3775          | 95.3%            |  | 90-180          | 184.2         | 4.7%             |  | 0-180           | 3960          | 100.0%           |




## Report of Test

### LLIA001159-006A

Luminous Intensity (Candela) Table

|                         |      | Lateral (C-Plane) Angles |      |      |      |      |       |      |       |      |
|-------------------------|------|--------------------------|------|------|------|------|-------|------|-------|------|
|                         |      | 0                        | 22.5 | 45   | 67.5 | 90   | 112.5 | 135  | 157.5 | 180  |
| Vertical (Gamma) Angles | 0    | 1381                     | 1381 | 1381 | 1381 | 1381 | 1381  | 1381 | 1381  | 1381 |
|                         | 2.5  | 1374                     | 1374 | 1377 | 1383 | 1389 | 1383  | 1377 | 1374  | 1374 |
|                         | 5    | 1366                     | 1367 | 1371 | 1377 | 1382 | 1377  | 1371 | 1367  | 1366 |
|                         | 7.5  | 1354                     | 1356 | 1359 | 1366 | 1371 | 1366  | 1359 | 1356  | 1354 |
|                         | 10   | 1338                     | 1340 | 1344 | 1351 | 1356 | 1351  | 1344 | 1340  | 1338 |
|                         | 12.5 | 1324                     | 1323 | 1324 | 1332 | 1337 | 1332  | 1324 | 1323  | 1324 |
|                         | 15   | 1294                     | 1297 | 1301 | 1309 | 1315 | 1309  | 1301 | 1297  | 1294 |
|                         | 17.5 | 1266                     | 1268 | 1280 | 1283 | 1289 | 1283  | 1280 | 1268  | 1266 |
|                         | 20   | 1235                     | 1237 | 1245 | 1255 | 1260 | 1255  | 1245 | 1237  | 1235 |
|                         | 22.5 | 1200                     | 1203 | 1212 | 1223 | 1228 | 1223  | 1212 | 1203  | 1200 |
|                         | 25   | 1162                     | 1166 | 1177 | 1188 | 1193 | 1188  | 1177 | 1166  | 1162 |
|                         | 27.5 | 1122                     | 1127 | 1139 | 1152 | 1157 | 1152  | 1139 | 1127  | 1122 |
|                         | 30   | 1079                     | 1085 | 1099 | 1115 | 1117 | 1115  | 1099 | 1085  | 1079 |
|                         | 32.5 | 1035                     | 1042 | 1058 | 1073 | 1077 | 1073  | 1058 | 1042  | 1035 |
|                         | 35   | 989                      | 998  | 1015 | 1029 | 1035 | 1029  | 1015 | 998   | 989  |
|                         | 37.5 | 942                      | 952  | 971  | 986  | 992  | 986   | 971  | 952   | 942  |
|                         | 40   | 893                      | 906  | 925  | 942  | 948  | 942   | 925  | 906   | 893  |
|                         | 42.5 | 845                      | 859  | 879  | 898  | 904  | 898   | 879  | 859   | 845  |
|                         | 45   | 795                      | 811  | 834  | 853  | 860  | 853   | 834  | 811   | 795  |
|                         | 47.5 | 746                      | 763  | 787  | 808  | 815  | 808   | 787  | 763   | 746  |
| 50                      | 696  | 715                      | 740  | 763  | 770  | 763  | 740   | 715  | 696   |      |
| 52.5                    | 646  | 666                      | 694  | 717  | 724  | 717  | 694   | 666  | 646   |      |
| 55                      | 597  | 618                      | 647  | 671  | 679  | 671  | 647   | 618  | 597   |      |
| 57.5                    | 547  | 570                      | 600  | 625  | 633  | 625  | 600   | 570  | 547   |      |
| 60                      | 498  | 522                      | 554  | 580  | 588  | 580  | 554   | 522  | 498   |      |
| 62.5                    | 449  | 474                      | 507  | 534  | 543  | 534  | 507   | 474  | 449   |      |
| 65                      | 400  | 427                      | 462  | 489  | 498  | 489  | 462   | 427  | 400   |      |
| 67.5                    | 353  | 380                      | 416  | 444  | 453  | 444  | 416   | 380  | 353   |      |
| 70                      | 306  | 334                      | 371  | 400  | 409  | 400  | 371   | 334  | 306   |      |
| 72.5                    | 260  | 290                      | 328  | 357  | 366  | 357  | 328   | 290  | 260   |      |
| 75                      | 216  | 247                      | 285  | 314  | 323  | 314  | 285   | 247  | 216   |      |
| 77.5                    | 174  | 205                      | 244  | 272  | 282  | 272  | 244   | 205  | 174   |      |
| 80                      | 134  | 166                      | 204  | 233  | 242  | 233  | 204   | 166  | 134   |      |
| 82.5                    | 97   | 129                      | 166  | 194  | 203  | 194  | 166   | 129  | 97    |      |
| 85                      | 63   | 95                       | 131  | 157  | 166  | 157  | 131   | 95   | 63    |      |
| 87.5                    | 32   | 63                       | 97   | 122  | 131  | 122  | 97    | 63   | 32    |      |
| 90                      | 5    | 35                       | 68   | 93   | 101  | 93   | 68    | 35   | 5     |      |



## Report of Test

LLIA001159-006A

Luminous Intensity (Candela) Table

|                         |       | Lateral (C-Plane) Angles |      |    |      |     |       |     |       |     |
|-------------------------|-------|--------------------------|------|----|------|-----|-------|-----|-------|-----|
|                         |       | 0                        | 22.5 | 45 | 67.5 | 90  | 112.5 | 135 | 157.5 | 180 |
| Vertical (Gamma) Angles | 90    | 5                        | 35   | 68 | 93   | 101 | 93    | 68  | 35    | 5   |
|                         | 92.5  | 5                        | 33   | 65 | 89   | 97  | 89    | 65  | 33    | 5   |
|                         | 95    | 5                        | 32   | 63 | 86   | 94  | 86    | 63  | 32    | 5   |
|                         | 97.5  | 5                        | 30   | 61 | 83   | 90  | 83    | 61  | 30    | 5   |
|                         | 100   | 5                        | 29   | 58 | 80   | 87  | 80    | 58  | 29    | 5   |
|                         | 102.5 | 5                        | 27   | 56 | 77   | 83  | 77    | 56  | 27    | 5   |
|                         | 105   | 5                        | 26   | 53 | 73   | 80  | 73    | 53  | 26    | 5   |
|                         | 107.5 | 5                        | 24   | 51 | 70   | 77  | 70    | 51  | 24    | 5   |
|                         | 110   | 4                        | 20   | 48 | 66   | 73  | 66    | 48  | 20    | 4   |
|                         | 112.5 | 4                        | 15   | 46 | 63   | 70  | 63    | 46  | 15    | 4   |
|                         | 115   | 4                        | 11   | 43 | 60   | 66  | 60    | 43  | 11    | 4   |
|                         | 117.5 | 4                        | 6    | 40 | 56   | 63  | 56    | 40  | 6     | 4   |
|                         | 120   | 4                        | 3    | 37 | 53   | 59  | 53    | 37  | 3     | 4   |
|                         | 122.5 | 3                        | 3    | 33 | 50   | 56  | 50    | 33  | 3     | 3   |
|                         | 125   | 3                        | 3    | 26 | 46   | 52  | 46    | 26  | 3     | 3   |
|                         | 127.5 | 3                        | 2    | 20 | 43   | 49  | 43    | 20  | 2     | 3   |
|                         | 130   | 2                        | 2    | 14 | 37   | 45  | 37    | 14  | 2     | 2   |
|                         | 132.5 | 2                        | 2    | 9  | 30   | 38  | 30    | 9   | 2     | 2   |
|                         | 135   | 2                        | 0    | 3  | 23   | 31  | 23    | 3   | 0     | 2   |
|                         | 137.5 | 0                        | 0    | 0  | 17   | 24  | 17    | 0   | 0     | 0   |
| 140                     | 0     | 0                        | 0    | 10 | 17   | 10  | 0     | 0   | 0     |     |
| 142.5                   | 0     | 0                        | 0    | 4  | 10   | 4   | 0     | 0   | 0     |     |
| 145                     | 0     | 0                        | 0    | 0  | 3    | 0   | 0     | 0   | 0     |     |
| 147.5                   | 0     | 0                        | 0    | 0  | 0    | 0   | 0     | 0   | 0     |     |
| 150                     | 0     | 0                        | 0    | 0  | 0    | 0   | 0     | 0   | 0     |     |
| 152.5                   | 0     | 0                        | 0    | 0  | 0    | 0   | 0     | 0   | 0     |     |
| 155                     | 0     | 0                        | 0    | 0  | 0    | 0   | 0     | 0   | 0     |     |
| 157.5                   | 0     | 0                        | 0    | 0  | 0    | 0   | 0     | 0   | 0     |     |
| 160                     | 0     | 0                        | 0    | 0  | 0    | 0   | 0     | 0   | 0     |     |
| 162.5                   | 0     | 0                        | 0    | 0  | 0    | 0   | 0     | 0   | 0     |     |
| 165                     | 0     | 0                        | 0    | 0  | 0    | 0   | 0     | 0   | 0     |     |
| 167.5                   | 0     | 0                        | 0    | 0  | 0    | 0   | 0     | 0   | 0     |     |
| 170                     | 0     | 0                        | 0    | 0  | 0    | 0   | 0     | 0   | 0     |     |
| 172.5                   | 0     | 0                        | 0    | 0  | 0    | 0   | 0     | 0   | 0     |     |
| 175                     | 0     | 0                        | 0    | 0  | 0    | 0   | 0     | 0   | 0     |     |
| 177.5                   | 0     | 0                        | 0    | 0  | 0    | 0   | 0     | 0   | 0     |     |
| 180                     | 0     | 0                        | 0    | 0  | 0    | 0   | 0     | 0   | 0     |     |



## Report of Test

### LLIA001159-006A


| Coefficients of Utilization/Room Utilization - Zonal Cavity Method |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |    |    |    |    |
|--|-----|-----|-----|-----|--|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|--|----|----|----|----|
| Effective Floor Cavity Reflectance 0.20                            |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |    |    |    |    |
| RC   | 80  |     |     |     |  | 70  |     |     |     |  | 50  |     |     |  | 30  |     |     |  | 10 |    |    | 0  |
| RW   | 70  | 50  | 30  | 10  |  | 70  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50 | 30 | 10 | 0  |
| RCR  |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |    |    |    |    |
| 0  | 118 | 118 | 118 | 118 |  | 115 | 115 | 115 | 115 |  | 109 | 109 | 109 |  | 103 | 103 | 103 |  | 98 | 98 | 98 | 95 |
| 1  | 107 | 102 | 97  | 93  |  | 104 | 99  | 95  | 91  |  | 94  | 91  | 88  |  | 89  | 87  | 84  |  | 85 | 83 | 81 | 78 |
| 2  | 97  | 89  | 82  | 76  |  | 94  | 86  | 80  | 74  |  | 82  | 77  | 72  |  | 78  | 74  | 70  |  | 74 | 71 | 67 | 65 |
| 3  | 88  | 78  | 69  | 63  |  | 86  | 76  | 68  | 62  |  | 72  | 66  | 60  |  | 69  | 63  | 59  |  | 66 | 61 | 57 | 55 |
| 4  | 81  | 69  | 60  | 53  |  | 78  | 67  | 59  | 53  |  | 64  | 57  | 51  |  | 61  | 55  | 50  |  | 59 | 53 | 49 | 47 |
| 5  | 75  | 62  | 53  | 46  |  | 72  | 60  | 52  | 45  |  | 58  | 50  | 44  |  | 55  | 49  | 44  |  | 53 | 47 | 43 | 40 |
| 6  | 69  | 55  | 46  | 40  |  | 67  | 54  | 46  | 40  |  | 52  | 45  | 39  |  | 50  | 43  | 38  |  | 48 | 42 | 38 | 35 |
| 7  | 64  | 50  | 42  | 35  |  | 62  | 49  | 41  | 35  |  | 47  | 40  | 35  |  | 45  | 39  | 34  |  | 44 | 38 | 33 | 31 |
| 8  | 59  | 46  | 37  | 32  |  | 58  | 45  | 37  | 31  |  | 43  | 36  | 31  |  | 42  | 35  | 30  |  | 40 | 34 | 30 | 28 |
| 9  | 56  | 42  | 34  | 28  |  | 54  | 41  | 34  | 28  |  | 40  | 33  | 28  |  | 39  | 32  | 27  |  | 37 | 31 | 27 | 25 |
| 10   | 52  | 39  | 31  | 26  |  | 51  | 38  | 31  | 26  |  | 37  | 30  | 25  |  | 36  | 29  | 25  |  | 35 | 29 | 25 | 23 |

For absolute test reports, RUs are expressed as a percentage of total lumen output. For relative test reports, CUs are expressed as a percentage of total lamp output. Calculations were based on published IES procedures, and are based on the zonal cavity method. Basic assumptions: 1) Room surfaces are lambertian reflectors. 2) Incident flux on each surface is uniformly distributed. 3) The room is spectrally neutral. When luminaires are not evenly distributed throughout the room, or do not exhibit lateral symmetry, CU values may differ from actual performance.

| Circle of Light Plot |                           |   |            |  |
|----------------------|---------------------------|---|------------|--|
| Height(ft)           | Illuminance at Nadir (fc) | Ground-level distance to half-of-nadir illuminance (ft) |            |  |
|                      |                           | 0-180 deg   | 90-270 deg |  |
| 6.0                  | 38.4                      | 7.02  | 7.24       |  |
| 8.0                  | 21.6                      | 9.36  | 9.65       |  |
| 10.0                 | 13.8                      | 11.70   | 12.06      |  |
| 12.0                 | 9.6                       | 14.03   | 14.47      |  |
| 14.0                 | 7.0                       | 16.37   | 16.88      |  |
| 16.0                 | 5.4                       | 18.71   | 19.29      |  |


| Average Luminance (cd/m <sup>2</sup> ) |             |              |              |
|--|-------------|--------------|--------------|
|  | 0 deg Plane | 45 deg Plane | 90 deg Plane |
| 0                                      | 24363       | 24363        | 24363        |
| 45                                     | 19676       | 18123        | 17868        |
| 55                                     | 18134       | 16438        | 16236        |
| 65                                     | 16429       | 14642        | 14530        |
| 75                                     | 14288       | 12534        | 12605        |
| 85                                     | 11736       | 9855         | 10210        |

| Spacing Criterion |     |
|-------------------|-----|
| 0 degree plane:   | 1.2 |
| 90 degree plane:  | 1.2 |
| 180 degree plane: | 1.2 |
| 270 degree plane: | 1.2 |




## Report of Test LLIA001159-006A

### Iso-Illuminance Plot

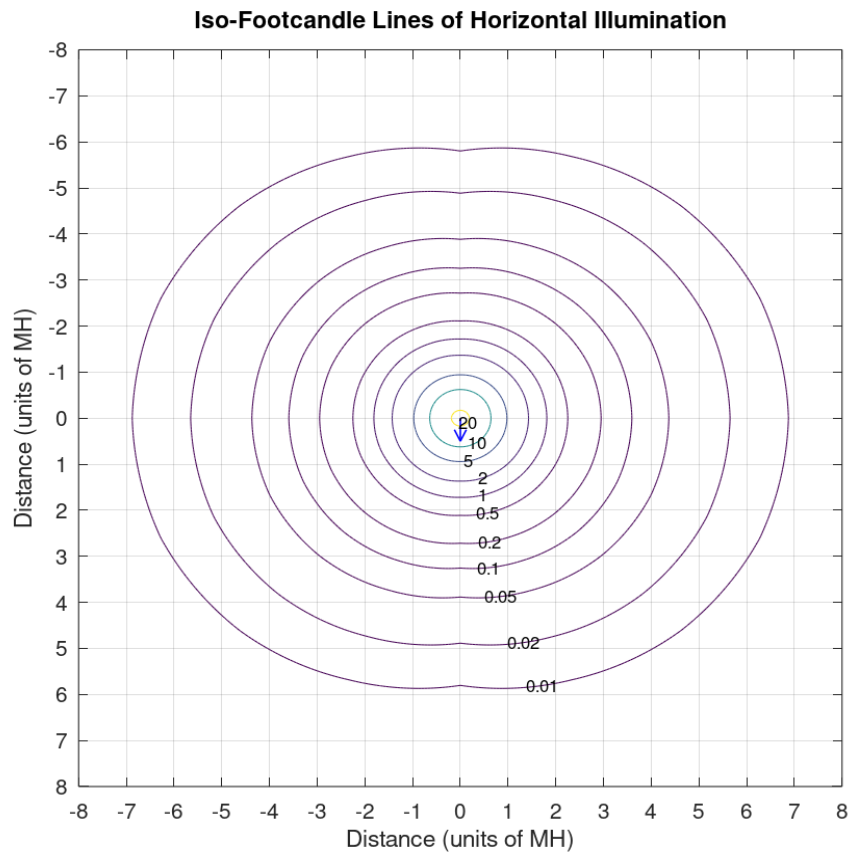


The isofootcandle values shown in the plot above are based on a mounting height of  $h = 8.0$  feet. Grid values show multiples of mounting height. The isoilluminance contour lines are expressed in units of footcandles. The values expressed are based on the direct light from a single unit without the contribution of room reflections.



Report of Test  
LLIA001159-006A

**Additional Pictures of Test Subject**





## Report of Test

### LLIA001159-006A

Test Distance                    9.5 m  
Ambient Temperature        25.3 °C

#### Notes

The laboratory has not participated in the selection of samples to be tested. All testing is performed on the understanding that the significance of the report is limited to the extent that the test sample is representative of production units.

Tested in accordance with the applicable sections of publications: IES LM-79-08 and ANSI C82.77-10:2014. Format of reports and angular increments based on IES LM-41-14 and LM-46-04.

The luminous intensity values, and other derived quantities, contained in this report are based on the absolute data, as measured.

Prorating the performance of the sample for the use of other component combinations (such as lamp / LED / Ballast / driver), or for use in different environmental conditions than that tested, may produce erroneous results.

This report is free of erasures and corrections.

Photometric intensity values are reported using the CIE C-Gamma coordinate system as defined in CIE publication number 121.

This report may contain data that are not covered by the NVLAP accreditation. Quantities marked with ‡ are not covered.

This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the Federal Government.





## Report of Test

**LLIA001159-006B**

Integrating Sphere Report

Catalog Number: MLR3-HO-K35-80-4-XX-AL1-UNV

Recessed ceiling mounted, extruded aluminum housing with steel endcaps,  
formed white enamel aluminum reflector, translucent white plastic enclosure.

144 white LEDs, One Osram PrevaLED Bar LED board.

One Osram Optotronic OTi 30/120-277/1A0 DIM-L G2 LED driver labeled as 620mA



### Performance Summary

|              |           |
|--------------|-----------|
| Voltage      | 120.0 Vac |
| Current      | 0.2934 A  |
| Power        | 34.82 W   |
| Frequency    | 60.00 Hz  |
| Power Factor | 0.989     |
| Current THD  | 6.3 %     |


|                     |                  |
|---------------------|------------------|
| Total Luminous Flux | 3980.9 lm        |
| Efficacy            | 114.3 lm/W       |
| Chromaticity (x,y)  | (0.4062, 0.3931) |
| (u',v')             | (0.2353, 0.5124) |
| Duv                 | 0.0008           |
| CCT                 | 3499 K           |
| CRI (Ra)            | 82               |
| R9                  | 6                |
| TM-30: Rf           | 81               |
| TM-30: Rg           | 97               |

Prepared For:

Precision Architectural Lighting  
4830 Timber Creek Drive  
Houston, TX 77017, USA

Test date: 08/30/2019

Report date: 09/04/2019




**Test Report Number: LLIA001159-006B**


Catalog Number: MLR3-HO-K35-80-4-XX-AL1-UNV

Recessed ceiling mounted, extruded aluminum housing with steel endcaps,  
formed white enamel aluminum reflector, translucent white plastic enclosure.

144 white LEDs, One Osram PrevaLED Bar LED board.

One Osram Optotronic OTi 30/120-277/1A0 DIM-L G2 LED driver labeled as 620mA

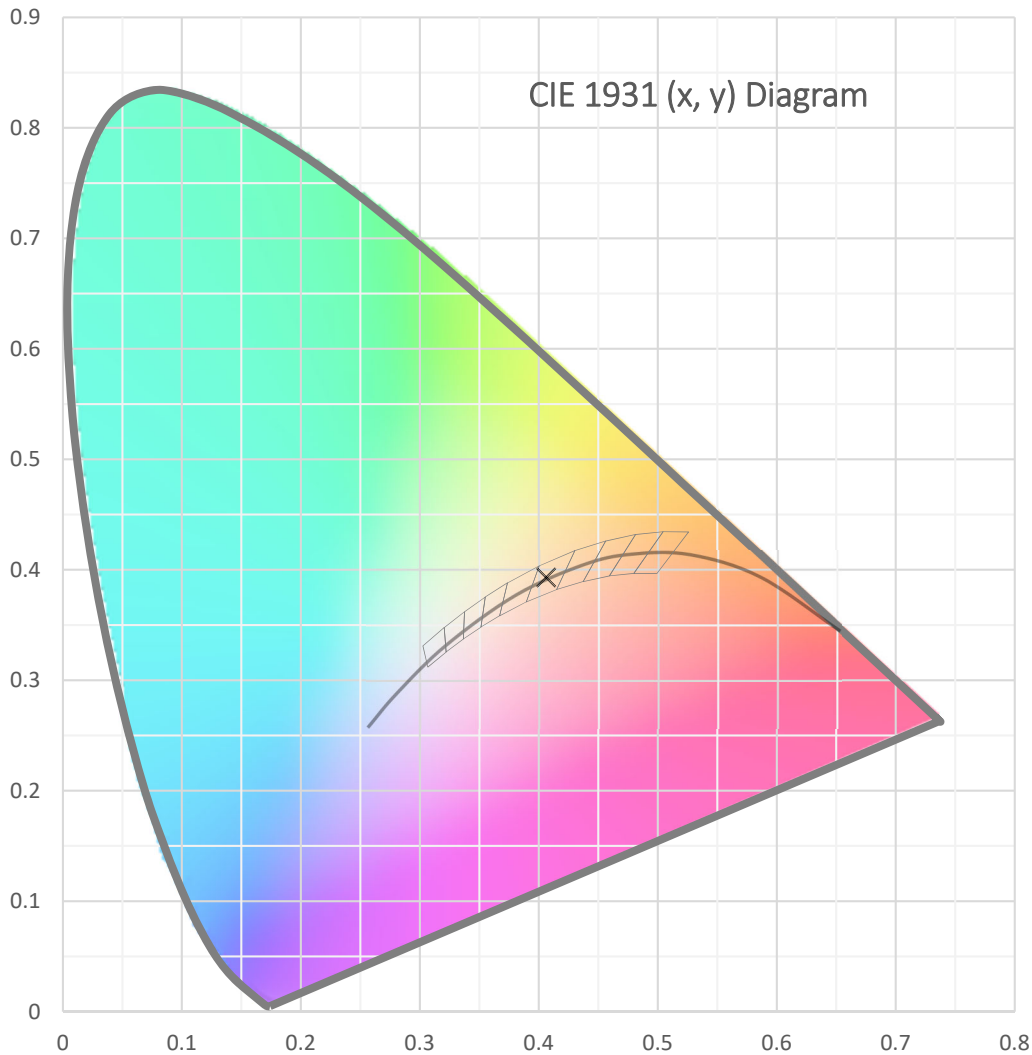




**Test Report Number: LLIA001159-006B**


Catalog Number: MLR3-HO-K35-80-4-XX-AL1-UNV

Recessed ceiling mounted, extruded aluminum housing with steel endcaps,  
formed white enamel aluminum reflector, translucent white plastic enclosure.

144 white LEDs, One Osram PrevaLED Bar LED board.

One Osram Optotronic OTi 30/120-277/1A0 DIM-L G2 LED driver labeled as 620mA

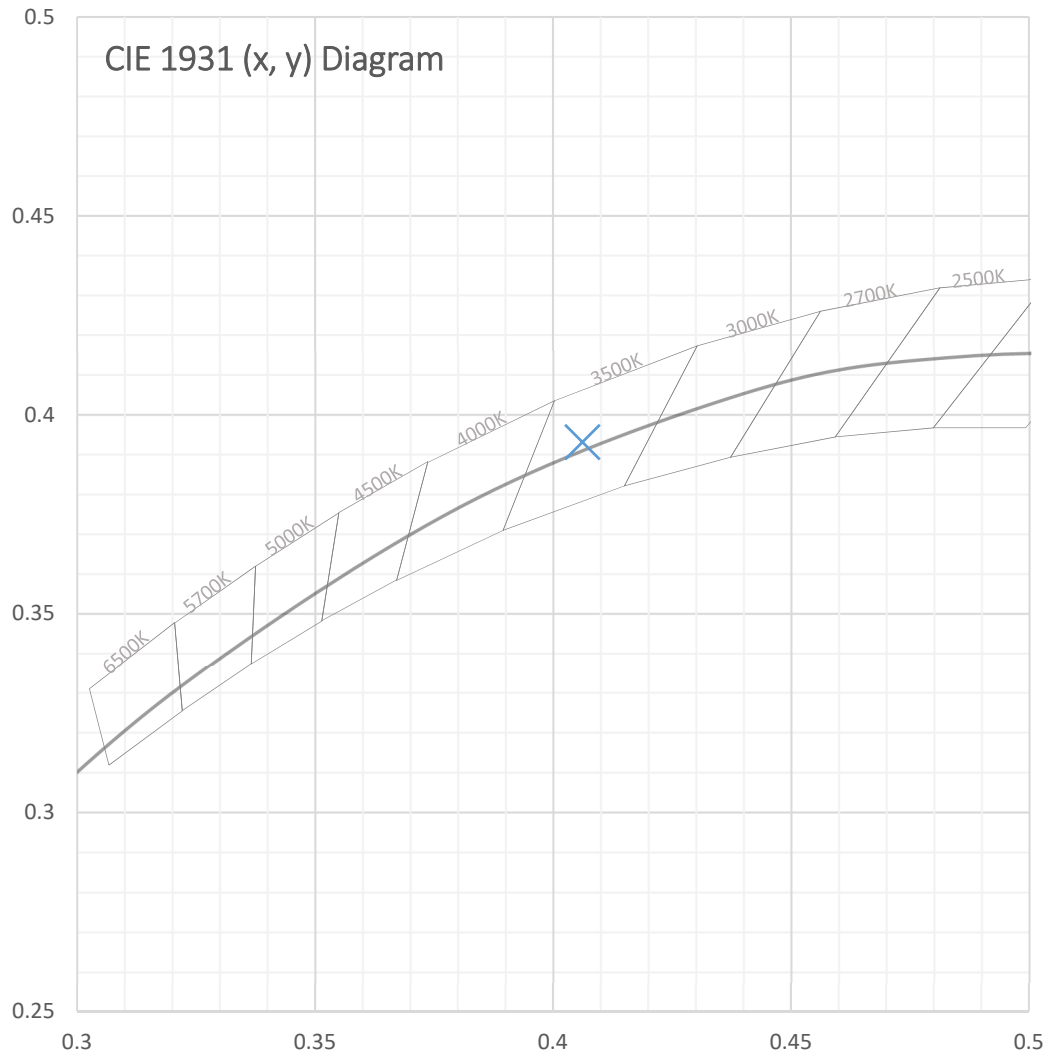



**Test Report Number: LLIA001159-006B**

Catalog Number: MLR3-HO-K35-80-4-XX-AL1-UNV

Recessed ceiling mounted, extruded aluminum housing with steel endcaps,  
formed white enamel aluminum reflector, translucent white plastic enclosure.

144 white LEDs, One Osram PrevaLED Bar LED board.

One Osram Optotronic OTi 30/120-277/1A0 DIM-L G2 LED driver labeled as 620mA

|                      |                                     |                  |
|----------------------|-------------------------------------|------------------|
| <b>Spectral Data</b> | Total Radiant Flux                  | 11.91 W          |
|                      | Total Luminous Flux                 | 3980.9 Lm        |
|                      | Chromaticity CIE 1931 (x, y)        | (0.4062, 0.3931) |
|                      | Chromaticity CIE 1976 (u', v')      | (0.2353, 0.5124) |
|                      | Correlated Color Temperature (CCT)  | 3499 K           |
|                      | Color Rendering Index (Ra)          | 82               |
|                      | R1                                  | 81               |
|                      | R2                                  | 88               |
|                      | R3                                  | 94               |
|                      | R4                                  | 83               |
|                      | R5                                  | 81               |
|                      | R6                                  | 84               |
|                      | R7                                  | 85               |
|                      | R8                                  | 62               |
|                      | R9                                  | 6                |
|                      | R10                                 | 71               |
|                      | R11                                 | 82               |
|                      | R12                                 | 60               |
|                      | R13                                 | 83               |
|                      | R14                                 | 96               |
|                      | TM-30: Rf                           | 81               |
|                      | TM-30: Rg                           | 97               |
|                      | Distance from Planckian Locus (Duv) | 0.0008           |
|                      | Scotopic/Photopic Ratio *           | 1.489            |

**Electrical Data**

|              |           |
|--------------|-----------|
| Voltage      | 120.0 Vac |
| Current      | 0.2934 A  |
| Power        | 34.82 W   |
| Frequency    | 60.00 Hz  |
| Power Factor | 0.989     |
| Current THD  | 6.3 %     |



**Test Report Number: LLIA001159-006B**

Catalog Number: MLR3-HO-K35-80-4-XX-AL1-UNV


Recessed ceiling mounted, extruded aluminum housing with steel endcaps,  
formed white enamel aluminum reflector, translucent white plastic enclosure.


144 white LEDs, One Osram PrevaLED Bar LED board.

One Osram Optotronic OTi 30/120-277/1A0 DIM-L G2 LED driver labeled as 620mA




**Summary Spectral Power Distribution (wavelength - nm, spectral power - mW)**


|     |          |     |          |     |          |     |          |
|-----|----------|-----|----------|-----|----------|-----|----------|
| 380 | 0.000443 | 480 | 0.011155 | 580 | 0.067435 | 680 | 0.017736 |
| 385 | 0.000479 | 485 | 0.011766 | 585 | 0.070139 | 685 | 0.015300 |
| 390 | 0.000609 | 490 | 0.014233 | 590 | 0.072657 | 690 | 0.013109 |
| 395 | 0.000782 | 495 | 0.018830 | 595 | 0.074110 | 695 | 0.011233 |
| 400 | 0.001017 | 500 | 0.025319 | 600 | 0.074736 | 700 | 0.009602 |
| 405 | 0.001282 | 505 | 0.032080 | 605 | 0.073965 | 705 | 0.008195 |
| 410 | 0.001598 | 510 | 0.038052 | 610 | 0.072254 | 710 | 0.006968 |
| 415 | 0.002050 | 515 | 0.042525 | 615 | 0.069580 | 715 | 0.005961 |
| 420 | 0.002998 | 520 | 0.045703 | 620 | 0.066006 | 720 | 0.005073 |
| 425 | 0.004861 | 525 | 0.047709 | 625 | 0.062080 | 725 | 0.004305 |
| 430 | 0.008566 | 530 | 0.048869 | 630 | 0.057693 | 730 | 0.003673 |
| 435 | 0.015091 | 535 | 0.049964 | 635 | 0.053333 | 735 | 0.003120 |
| 440 | 0.025436 | 540 | 0.050857 | 640 | 0.048572 | 740 | 0.002656 |
| 445 | 0.042364 | 545 | 0.051770 | 645 | 0.044045 | 745 | 0.002269 |
| 450 | 0.062504 | 550 | 0.052980 | 650 | 0.039557 | 750 | 0.001936 |
| 455 | 0.061151 | 555 | 0.054530 | 655 | 0.035182 | 755 | 0.001658 |
| 460 | 0.039360 | 560 | 0.056366 | 660 | 0.031074 | 760 | 0.001429 |
| 465 | 0.026310 | 565 | 0.058673 | 665 | 0.027182 | 765 | 0.001226 |
| 470 | 0.019575 | 570 | 0.061395 | 670 | 0.023628 | 770 | 0.001048 |
| 475 | 0.013484 | 575 | 0.064343 | 675 | 0.020523 | 775 | 0.000901 |
|     |          |     |          |     |          | 780 | 0.000776 |

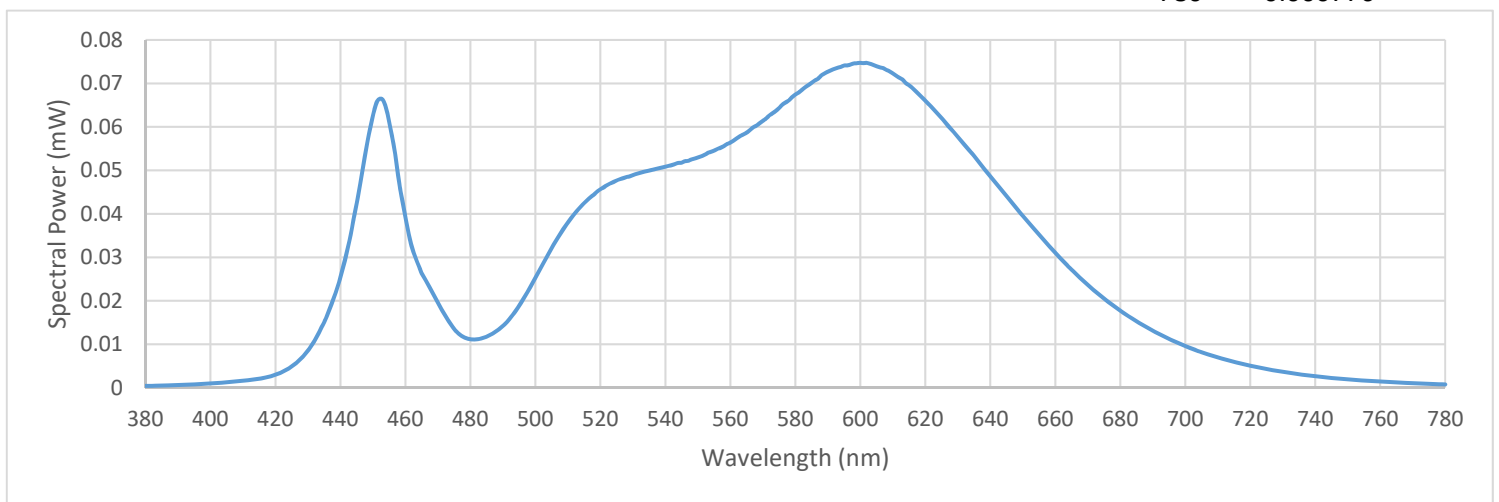



IES TM-30 Details

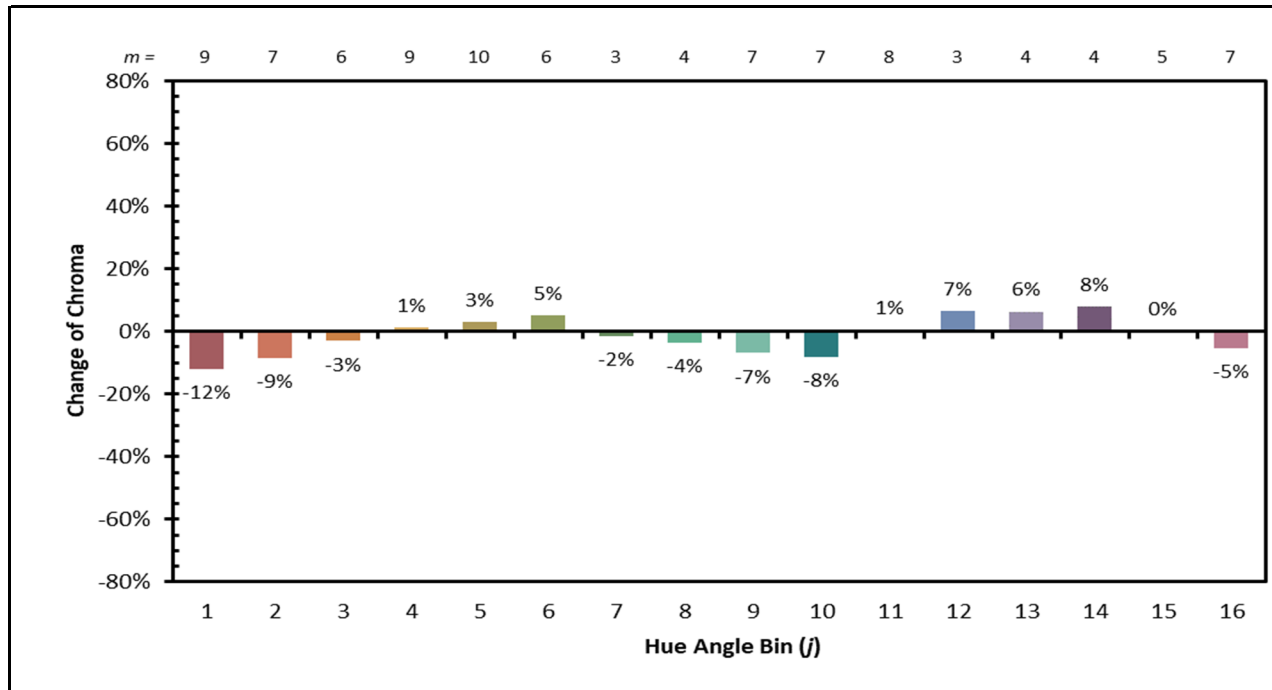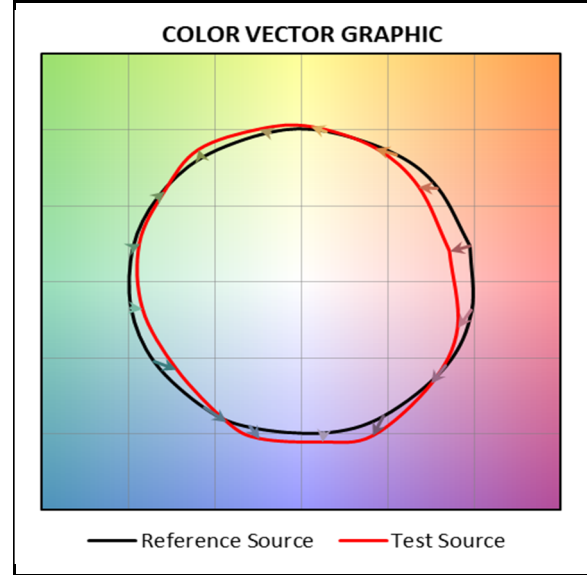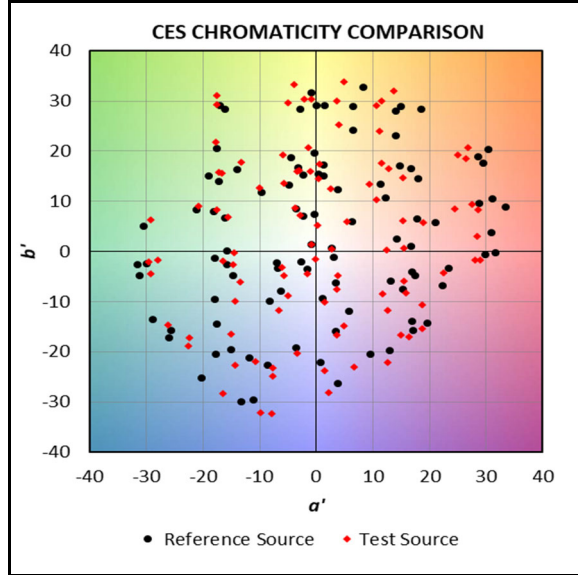



**Test Report Number: LLIA001159-006B**

Catalog Number: MLR3-HO-K35-80-4-XX-AL1-UNV

Recessed ceiling mounted, extruded aluminum housing with steel endcaps,  
formed white enamel aluminum reflector, translucent white plastic enclosure.

144 white LEDs, One Osram PrevaLED Bar LED board.

One Osram Optotronic OTi 30/120-277/1A0 DIM-L G2 LED driver labeled as 620mA

**Test Equipment Configuration:** LightLab International Allentown 2m Integrating Sphere  
Measurements acquired using a Labsphere CDS 2600 spectroradiometer  
Testing was performed using 4 $\pi$  geometry

**Test Temperature:** 25.4 °C

**Test Procedure:** Tested in accordance with the applicable sections of:  
LM-79-08, LM-78-07, LM-58-13, ANSI\_ANSLG C78.377-2017,  
ANSI C82-77-10:2014, TM-30-15


**Significance:** The laboratory has not participated in the selection of samples to be tested.  
All testing is performed on the understanding that the significance of the report  
is limited to the extent that the test sample is representative of production units.

**Notes:** The measurements and other derived quantities contained in this report  
are based on the absolute data as measured.

Prorating the performance of the sample for the use of other component  
combinations (such as lamp / LED / Ballast / driver), or for use in different  
environmental conditions than that tested, may produce erroneous results.

This report is free of erasures and corrections

This report may contain data that are not covered by the NVLAP accreditation.  
Quantities marked with \* are not covered.



## Report of Test

**LLIA001159-006C**

Electrical Test Report

Catalog Number: MLR3-HO-K35-80-4-XX-AL1-UNV

Recessed ceiling mounted, extruded aluminum housing with steel endcaps,  
formed white enamel aluminum reflector, translucent white plastic enclosure.

144 white LEDs, One Osram PrevaLED Bar LED board.

One Osram Optotronic OTi 30/120-277/1A0 DIM-L G2 LED driver labeled as 620mA



### Performance Summary

|              |           |
|--------------|-----------|
| Voltage      | 277.0 Vac |
| Current      | 0.1316 A  |
| Power        | 34.69 W   |
| Frequency    | 60.00 Hz  |
| Power Factor | 0.951     |
| Current THD  | 11.3 %    |

Ambient Temperature: 25.5 °C

Prepared For:  
Precision Architectural Lighting  
4830 Timber Creek Drive  
Houston, TX 77017, USA


Tested in accordance with the applicable sections of C82.77-10-2014. The laboratory has not participated in the selection of samples to be tested. All testing is performed on the understanding that the significance of the report is limited to the extent that the test sample is representative of production units. Prorating the performance of the sample for the use of other component combinations (such as lamp / LED / Ballast / driver), or for use in different environmental conditions than that tested, may produce erroneous results. This report is free of erasures and corrections.

Test date: 08/29/2019

Report date: 09/04/2019

Electrical Report Template V1-2





## Report of Test

LLIA001159-006D

ISTM Report

Catalog Number: MLR3-HO-K35-80-4-XX-AL1-UNV

Recessed ceiling mounted, extruded aluminum housing with steel endcaps,  
formed white enamel aluminum reflector, translucent white plastic enclosure.

144 white LEDs, One Osram PrevaLED Bar LED board.

One Osram Optotronic OTi 30/120-277/1A0 DIM-L G2 LED driver labeled as 620mA




Prepared For:  
Precision Architectural Lighting  
4830 Timber Creek Drive  
Houston, TX 77017, USA

This test report was issued by LightLab International Allentown, LLC without alterations or erasures.

Test date: 09/04/2019

Report date: 09/04/2019



**Test Report Number: LLIA001159-006D**


Catalog Number: MLR3-HO-K35-80-4-XX-AL1-UNV

Recessed ceiling mounted, extruded aluminum housing with steel endcaps,  
formed white enamel aluminum reflector, translucent white plastic enclosure.

144 white LEDs, One Osram PrevaLED Bar LED board.

One Osram Optotronic OTi 30/120-277/1A0 DIM-L G2 LED driver labeled as 620mA

- Purpose of Test:** To determine the in-situ temperature of the specified LED Ts point and driver Tc point. In this test, in-situ temperature refers to standard laboratory conditions with the luminaire configured in accordance with appropriate sections of UL1598-2008
- Luminaire Mounting:** Recessed/Ceiling (NON-IC)
- LED Test Point:** Thermocouples were attached to the LED case temperature point (Ts) as specified by report number SQETMR704203, issued 06/04/2018 by Nichia Corporation LED Testing Laboratory. The measured LED was selected according to guidance provided by DLC and ENERGY STAR for lumen maintenance projection.
- Driver Test Point:** Thermocouples were attached to the driver case in the location (Tc) designated by the manufacturer.
- Sample Selection:** LightLab International Allentown. LLC has not participated in the selection of sample(s) being tested. Testing is performed on the understanding that the significance of the report is limited to the extent to which the sample is representative of production units.
- Disclaimer:** This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
- Procedure:** In-situ temperature measurements were performed with the luminaire mounted inside of a normal temperature test box for type NON-IC luminaires. The luminaire supply voltage and frequency was set according to the luminaire manufacturer's instructions. The luminaire was allowed to reach stabilization as defined in UL1598-2008 prior to reported measurements. Testing was performed in a draft-free, temperature-controlled environment with an ambient temperature of 25 +/- 5 °C.
- Test Equipment:** GW Instek APS-7100 AC Power Source  
Xitron 2801 Power Analyzer  
Fluke 52-ii Thermometer



**Test Report Number: LLIA001159-006D**

Catalog Number: MLR3-HO-K35-80-4-XX-AL1-UNV

Recessed ceiling mounted, extruded aluminum housing with steel endcaps, formed white enamel aluminum reflector, translucent white plastic enclosure.

144 white LEDs, One Osram PrevaLED Bar LED board.

One Osram Optotronic OTi 30/120-277/1A0 DIM-L G2 LED driver labeled as 620mA

Electrical Measurements


|                  |           |
|------------------|-----------|
| Voltage          | 120.0 Vac |
| Current          | 0.2933 A  |
| Power            | 34.84 W   |
| Frequency        | 60.0 Hz   |
| Power Factor     | 0.990     |
| Current THD      | 6.3 %     |
| Driver #1 Output | 0.603 Adc |

Temperature Measurements

|             |        |                |        |
|-------------|--------|----------------|--------|
| LED #1 (Ts) | 57.4°C | Driver #1 (Tc) | 51.2°C |
|-------------|--------|----------------|--------|

\*The above temperatures have been normalized to 25°C ambient.

Measured Ambient Temperature (Ta) 24.1°C

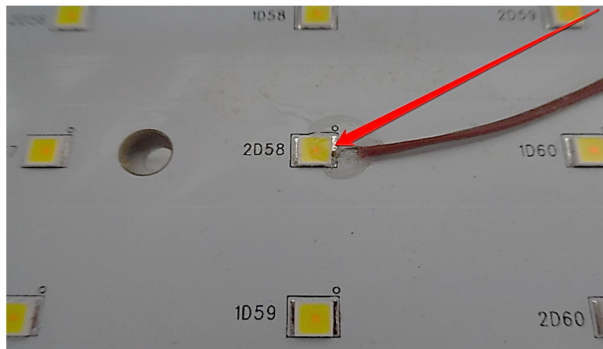

LED Thermocouple Location



Driver Thermocouple Location



Selected LED Location