# **100 Linear** Surface Mount

Pattern 2 Sided Submittal

Project Name	SO #	
,		

inter•lux

Fixture Type PO#

Ordering Information								
WG-100LDL	SM							
Model	Fixation	Pattern	Length	Power <sup>2</sup>	CRI/ CCT <sup>3</sup>	Driver <sup>4</sup>	Lens	Finish
WG-100LDL	SM	P <sup>1</sup>	A A×B A×B×C A×B×A×B	L M H	927 930 935 940	X S D010 L3DAE L3D0E DFPN	OD (std) SD	W (std) B G F

# 4.5" 114mm

whitegoods

### Luminaire

- Surface ceiling mount.
- Easily installed internal LED tray assembly with integral driver.
- High reflectance white reflector.
- Flush snap-in opal diffuser (standard).
- Powdercoat painted white RAL 9010.

## **Fixation**

■ SM = Surface Mount

### **Pattern**

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

# Length

A, B, C = specify inches to the nearest 0.25" (i.e. 72.25"). For pattens specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B).

# Power<sup>2</sup>

- L = 3.2W/ft low power (24V)
- $\blacksquare$  M = 6.4W/ft mid power (24V)
- $\blacksquare$  H = 10.5W/ft mid power (24V)

# CRI/CCT3

90+ CRI (low/mid/high power)

- 927 = 2700K, (173/321/478 lm/ft)
- 930 = 3000K, (179/331/493 lm/ft)
- $\blacksquare$  935 = 3500K, (183/337/503 lm/ft)
- $\blacksquare$  940 = 4000K, (184/341/508 lm/ft)

# Driver (Integral)<sup>4</sup>

- X = No driver, ordered separately
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3D0E = Lutron Hi-lume Premier 0.1 EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1% 120VAC

#### Lens

- OD = Satin opal diffuser (standard)
- SD = Satin clear diffuser (high efficiency)

## **Finish**

- W = White, 20% gloss, RAL9010 (standard)
- B = Black, 20% gloss
- G = Gray, 20% gloss
- F = Custom finished trim, specify RAL

### **Emergency**

- Emergency LED driver available, order separately.
- <sup>1</sup> See pattern specsheet.
- <sup>2</sup> Wattage shown does not include power supplies/drivers.
- <sup>3</sup> Delivered lumens with satin opal diffuser shown.
- <sup>4</sup> Remote power supply required. See power supply page for details.

Customer Approval	Company
Approved	Signature
Approved with corrections noted	Print Name
Revise and Resubmit	Date
Original Date Submitted	


# **100 Linear Surface**

Submittal - Pattern 2 Sided

5



Submittai	- Patterr	1 2 Sided		Project Name		SO#
				Fixture Type	-	PO#
System	Qty.	'A'	'B'			
1				Customer Approval	Company _	
2				Approved	Signature _	
3				Approved with corrections noted	Print Name	
4				Revise and Resubmit	Date	

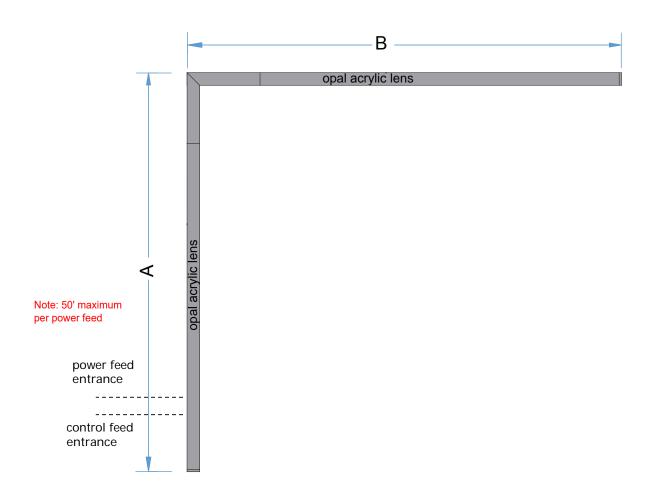

2