

PO#

SO #___

100 Linear Surface Mount

LOO LINEAL SULTACE MOUNT

Pattern 4 Sided Submittal



Ordering Information											
WG-100LDL	SM										
Model	Fixation	Pattern	Length	Power ²	CRI/ CCT ³	Driver ⁴	Lens	Finish			
WG-100LDL	SM	P ¹	A A×B A×B×C A×B×A×B	L M H	927 930 935 940	X S D010 L3DAE L3D0E DFPN	OD (std) SD	W (std) B G F			

Project Name

Fixture Type

4.5" 114mm

Luminaire

- Surface ceiling mount.
- Easily installed internal LED tray assembly with integral driver.
- High reflectance white reflector.
- Flush snap-in opal diffuser (standard).
- Powdercoat painted white RAL 9010.

Fixation

■ SM = Surface Mount

Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

Length

A, B, C = specify inches to the nearest 0.25" (i.e. 72.25"). For pattens specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B).

Power²

- L = 3.2W/ft low power (24V)
- M = 6.4W/ft mid power (24V)
- \blacksquare H = 10.5W/ft mid power (24V)

CRI/CCT3

90+ CRI (low/mid/high power)

- 927 = 2700K, (173/321/478 lm/ft)
- 930 = 3000K, (179/331/493 lm/ft)
- 935 = 3500K, (183/337/503 lm/ft)
- 940 = 4000K, (184/341/508 lm/ft)

Driver (Integral)⁴

- X = No driver, ordered separately
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3D0E = Lutron Hi-lume Premier 0.1 EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1% 120VAC

Lens

- OD = Satin opal diffuser (standard)
- SD = Satin clear diffuser (high efficiency)

Finish

- W = White, 20% gloss, RAL9010 (standard)
- B = Black, 20% gloss
- G = Gray, 20% gloss
- F = Custom finished trim, specify RAL

Emergency

- Emergency LED driver available, order separately.
- ¹ See pattern specsheet.
- ² Wattage shown does not include power supplies/drivers.
- ³ Delivered lumens with satin opal diffuser shown.
- ⁴ Remote power supply required. See power supply page for details.

Customer Approval	Company
Approved	Signature
Approved with corrections noted	Print Name
Revise and Resubmit	Date
Revise and Resubmit	Date

Original Date Submitted



100 Linear Surface


Submittal - Pattern 4 Sided



 Project Name
 ______SO #_____

 Fixture Type
 PO# ______

System	Qty.	'A'	'B'		
1				Customer Approval	Company
2				Approved	Signature
3				Approved with corrections noted	Print Name
4 5				Revise and Resubmit	Date

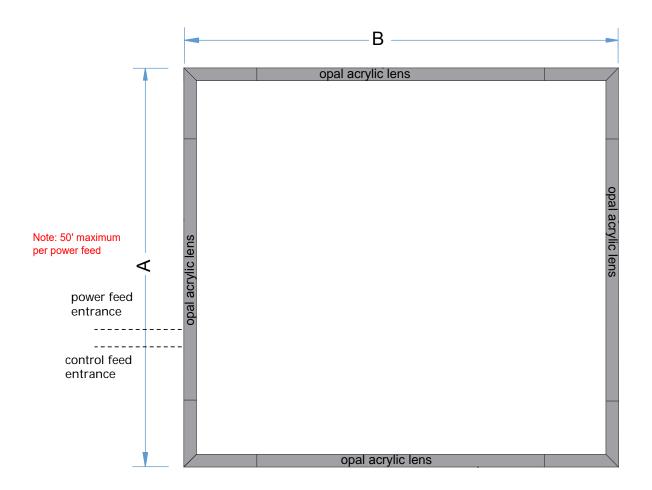

2