


# Box Cove 2

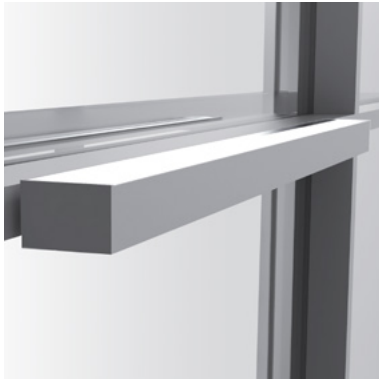

Ordering Information									
WG-BC2	SM								
Model	Fixation	Pattern	Length <sup>2</sup>	Power <sup>3</sup>	CRI/CCT	Driver <sup>5</sup>	Lens	Finish	Options
WG-BC2	SM	S PC <sup>1</sup> PR <sup>1</sup> PZ <sup>1</sup>	24 36 48 72 96 XX	P1 P2 P3 P4	927 930 935 940 TW	E1 L1 L0 A3 POE BT TQ D2	SSD (std) SDC	W (std) SA DB F	BM EWM

## Luminaire

- Light source positioned for optimum horizontal spread of illumination.
- Light source is not visible from any viewing angle up to and including direct horizontal view.
- Delivers continuous soft wash of directed light to above surface.
- Satin Diffuser for high efficiency and soft edge beam without striations.
- Removable light source sub assembly for simple installation and maintenance.
- High efficiency linear LED in a range of outputs.
- Lengths and angles factory cut to exact field dimensions.

## Fixation

- WM = Surface Mount

## Pattern

- S = Straight run
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° inside corners<sup>1</sup>
- PR = Standard patterns raft 2, 3 or 4 sided with 90° outside corners<sup>1</sup>
- PZ = Non-standard patterns and/or corners other than 90°, consult factory<sup>1</sup>

## Length

- 24 = 24"
- 36 = 36"
- 48 = 48"
- 72 = 72"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"

## Power<sup>3</sup> (2700/3000/3500/4000K)

- P1 = 3W/ft (393/409/424/435 lm/ft)
- P2 = 6W/ft (700/728/755/774 lm/ft)
- P3 = 10W/ft (1153/1220/1244/1277 lm/ft)
- P4 = 15W/ft (1671/1740/1822/1871 lm/ft)

## CRI/CCT<sup>4</sup> 90+ CRI

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW = Tuneable white 2200-4000K

## Driver (integral)<sup>5</sup>

- E1 = EdoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- L0 = Lutron 0.1% dimming, Ecosystem (120-277V)
- A3 = Advance 1% dimming, 0-10V (347V ONLY)
- PoE = Power over Ethernet
- BT = Wireless CAS – Casambi (Tunable white ONLY)
- TQ = T-Series for Lutron Quantum 0.1% (120-277V) (Tunable white ONLY)
- D2 = Two-channel DALI-2 certified 0.1% (120-277V) (Tunable white ONLY)

## Lens

- SSD = Snap On Satin Diffuser (standard)
- SDC = Satin Clear Dust Cover

## Finish

- W = White, 15% gloss, RAL9010 (standard)
- SA = Satin Aluminum
- DB = Dark Bronze
- F = Custom finish, specify RAL


## Options

- BM = Bracket Mount
- EWM = End Wall Mount


## Emergency Remote Only

- Emergency LED battery backup available, order separately.

- 1 Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options.
- 2 See pattern specsheet.
- 3 Wattage shown does not include power supplies/drivers.
- 4 Delivered lumens with snap on satin diffuser shown.
- 5 Integral driver. See power supply page for details.



Snap On Satin Diffuser (SSD)

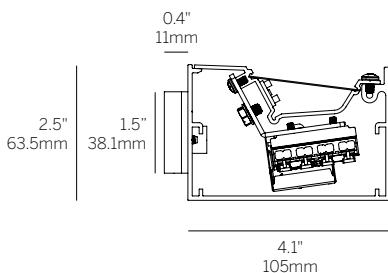

Shown with optional Bracket Mount (BM) and optional Satin Clear Dust Cover (SDC)