



Ordering Information										
Model	Fixation	Pattern	Length	Power ¹	CRI/ CCT ²	Driver ³	In-fill	Lens	Finish	Options
WG-VBC	RBT	S ¹ PC ² PR ² PZ ²	A A x B A x B x C A x B x A x B	L M H XH	927 930 935 940	X S D010 L3DAE L3DOE DFPN	X P4 P6 PX	SD (std)	W (std) F	LEC REC LREC

Luminaire

- Light source positioned for optimum vertical spread of illumination.
- Light source is not visible from any viewing angle up to and including direct vertical view.
- Delivers continuous soft wash of directed light to adjacent surface.
- Satin clear diffuser for high efficiency and soft edge beam without striations.
- Removable light source sub assembly for simple installation and maintenance.
- High efficiency linear LED in a range of outputs.
- Lengths and angles factory cut to exact field dimensions.
- Mitered corners available with continuous illumination.

Fixation

- RBT = Recessed bezel trim

Pattern

- S = Straight run¹
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners²
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners²
- PZ = Non-standard patterns and/or corners other than 90°, consult factory²

Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

Power³

- L = 3W/ft low power (24V)
- M = 6W/ft medium power (24V)
- H = 10W/ft high power (24V)
- XH = 13W/ft extra high power (24V)

CRI / CCT⁴

90+ CRI minimum (Low/Mid/High/Extra High)

- 927 = 2700K, (265/529/882/1147 lm/ft)
- 930 = 3000K, (265/529/882/1147 lm/ft)
- 935 = 3500K, (270/540/900/1170 lm/ft)
- 940 = 4000K, (270/540/900/1170 lm/ft)

Driver (integral)⁵

- X = No driver, ordered separately
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (remote)
- DFPN = Lutron Forward Phase 1%, 120VAC

In-fill

- X = No in-fill panel
- P4 = 4" in-fill panel
- P6 = 6" in-fill panel
- PX = Custom in-fill panel

Lens

- SD = Satin clear diffuser (standard)

Finish

- W = White, 15% gloss, RAL9010 (standard)
- F = Custom finish, specify RAL


Options

- LEC = Left end cap
- REC = Right end cap
- LREC = Left & Right end caps


Emergency Remote Only

- Emergency LED battery backup available, order separately.

- 1 Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options.
- 2 See pattern specsheet.
- 3 Wattage shown does not include power supplies/drivers.
- 4 Delivered lumens with satin clear diffuser shown.
- 5 Integral driver, except L3DOE (remote only). See power supply page for details.



Bezel Trim (RBT)

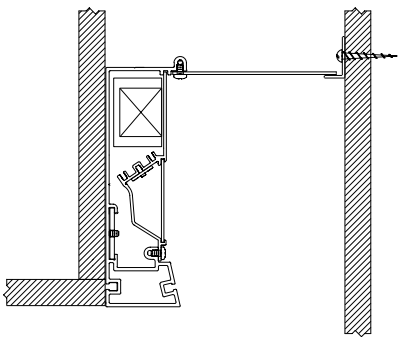


Gypsum Ceiling Mouting
4" minimum offset, 6" typical offset.

Vertical Box Cove


Ends and Corners




End Caps



WG-VBC-LEC
Left End Cap*



top view



WG-VBC-REC
Right End Cap*