


EVOLUTION SPOT

Housing: Spotlight, solid Aluminum housing, 330° hinge, 24° and 38°
Design: Ulrich Sattler

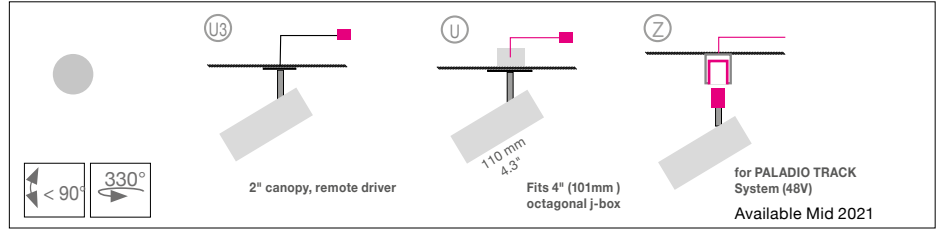


	Size: Ø / L mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Beam angle	Item No.	LED direct	Dimming	LED indirect	Finish	Power supply cable	Mounting version
Size	Ø 42 / L 110 mm	Ø 1.7 / L 4.3"	6,3	858	0,4 / 0.88	24°	1778.	x x .	x x .	x x .	x x .	x x x .	x x
	Ø 42 / L 110 mm	Ø 1.7 / L 4.3"	6,3	858	0,4 / 0.86	38°	1779.	x x .	x x .	x x .	x x .	x x x .	x x
LED CRI > 90	Warm-white		3000 K				x x x .	30.	x x .	x x .	x x .	x x x .	x x
	Neutral-white		4000 K				x x x .	40.	x x .	x x .	x x .	x x x .	x x
	Extra warm-white		2700 K				x x x .	27.	x x .	x x .	x x .	x x x .	x
Dimming	Standard: 0-10V		U3 U U Z				x x x .	x x .	11.	00.	x x .	x x x .	x x
Finish	Standard: 66 bronze anodized brushed		62 black anodized brushed		65 champ. gold anodized brushed		x x x .	x x .	x x .	x x .	---	x x x .	x x
Mounting version	2" for remote driver		5" - Fits 4" octagonal j-box Remote mounted driver		Mounting with adapter for 48V PALADIO TRACK System Available mid 2021		x x x .	x x .	x x .	x x .	x x .	x x x .	---

Canopy:		Type	For use with Mounting version	Protective rating
	DA 50	2" for remote driver	U3	IP40
	DA 125	5" - 4" octagonal j-box	U	IP40
Remote mounted ECO30W-350 LED driver (included in price)				
Input voltage for all external power supply units is 120-277 VAC 50-60 Hz.				

---	---	---	00.	---	000.	---
-----	-----	-----	------------	-----	-------------	-----

+ ECO30W-350



Remote mounted driver enclosure
13.25" (L) x 5" (W) x 2.25" (H)
surface mount in any orientation

Maximum Wiring Distance Guide*

Wire Gauge	Maximum Lead Length
18	72 ft (22 m)
16	118 ft (36 m)
14	150 ft (46 m)
12	200 ft (61 m)

*Actual distance must be calculated by installer. Must comply with NEC code.