

specter

SPSS MODULES
BREAK LINE

bold
lighting



BREAK LINE


Our Magnetic track system, SPECTER, is a highly configurable, 2 circuits, 24VDC low voltage track system. Thanks to its magnet mounting technology, the modules are inter-changeable instantaneously. Our track is available in ceiling pendant, surface and recessed mounting for both ceiling and walls. SPECTER track is also available with an optional linear uplight feature. The BREAK module offers a wide range of optics along with a tilt up to 90° allowing the illumination of both horizontal or vertical planes.

- Up to 1,800lm delivered output
- Available in 3 sizes, 3", 6" and 12"
- Adjustable tilt to 90°
- Available in Low glare baffles and Opal lens
- 4 beam options, narrow, medium, wide and Lambertian
- Fixtures designed to mount in SPECTER track
- For fixture dimming refer to track driver specifications¹
- Available in 4 standard finishes: Black, white, silver and bronze

Notes: ¹ Dimming options, 0-10V, ELV and DALI

Code example: **SPSF-J**03W-W-L827-2

STANDARD FINISHES

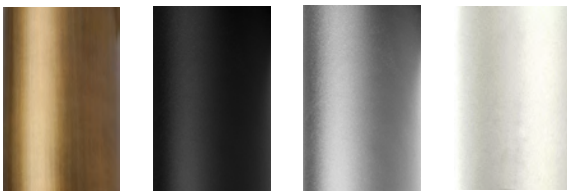

Z

B

S

W

DELIVERED LUMEN OUTPUT


Length		Watts		CRI +80				CRI +90			
				2700K	3000K	3500K	4000K	2700K	3000K	3500K	4000K
3"	4W			248lm	275lm	303lm	333lm	200lm	222lm	244lm	269lm
6"	8W			544lm	604lm	665lm	731lm	439lm	487lm	536lm	590lm
12"	16W			1416lm	1574lm	1731lm	1904lm	1142lm	1269lm	1396lm	1535lm

Series		Length		Body Finish		Baffle Finish		Beam Angle		CRI		Color Temp		Circuit	
SPSF-J	03	3"	W	White	W	White	L	120°	8	+80	27	2700K	1	1-Circuit	
	06	6"	B	Black	B	Black			9	+90	30	3000K	2	2-Circuit	
	12	12"	S	Silver	S	Silver					35	3500K			
			Z	Bronze	Z	Bronze			40	4000K					
			X	Custom	X	Custom									




Bold Lighting
4710 Ecton Dr., Marietta, GA 30066, USA
info@boldlighting.us www.boldlighting.us
t: +1-678-903-4061

Photometric data:
Type C Polar Curves

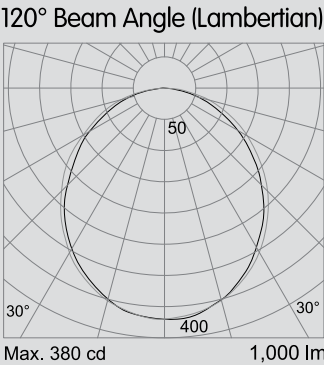

BREAK LINE 6

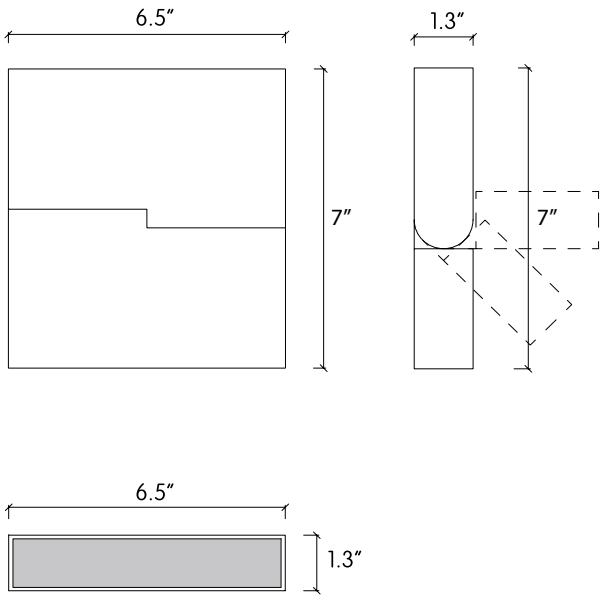

BREAK LINE 12

