



JOB NAME _____

CONTACT _____

ORDERING CODE _____

CANTARA Canopy, Track SW



501 black outer/gold inner **502** black outer/silver inner **503** white outer/gold inner



504 white outer/silver inner **505** white outer/white inner **507** bronze outer/white inner

DESCRIPTION

Bruck has created a pendant lamp which masterfully sets the scene for a modern design with its clear simple cylindrical form and supreme German craftsmanship. The minimalist design of Cantara Glass is focused on the essentials: light that bathes the room with a warm glow of gold or brilliance of silver. The inside is hand-coated with composition gold or silver. The finely textured metallic interior gives it an elegant charm. The light character of the golden version is comfortably warm, and thus provides a very cozy appeal. A translucent version without inner metallic coating is also offered in white. The lamp of the Cantara Glass is encased in a reflector made of hand-blown opal crystal glass. This distributes the light evenly and softly on the surface below.

HOUSING

The hardware is offered in matte chrome, bronze or chrome finish and seconds as the pendant thermal heatsink.

MOUNTING

- The pendant can be mounted from Bruck's field adjustable canopy. The standard overall cable length of 59" can be field-cut or specified when ordering. Overall cable length is measured and begins from top of canopy. See the decorative Junction Box Cover for open ceiling applications.
- Optional track mounting: Global Trac Systems, GEO track, ECO track / Halo® Power track, and Zonyx track. Overall cable length begins at the shoulder of the ECO/GEO adapter and the track center of the Zonyx adapter. Cable length measurement ends at the top of glass or to the mounting arms.
- Kevlar coated cable for easy cleaning, short circuit protection, no discoloration and fraying over time.

LISTINGS

- Listed to UL1598 and UL1574 (Suitable for dry locations only)
- Listed to CSA C22.2 #250.0 and #9.0

ORDERING CODE

LIGHT SOURCE	MLED ¹	Static White LED, 450lm
CCT	30K 35K	3000K 3500K
CRI	90	90 CRI
SHADE COLOR	501 502 503 504 505 507	black outer / gold inner black outer / silver inner white outer / gold inner white outer / silver inner white outer / white inner bronze outer / white inner
FINISH	MC ³ CH ³ BZ ³	matte chrome with clear braided cable chrome with clear braided cable bronze with brown braided cable
MOUNTING OPTIONS	P ² ECOBK ECOWH ECOMC GEOBK GEOWH GEOHC ZONMC	canopy pendant ECO/HALO black ECO/HALO white ECO/HALO matte chrome GEO black GEO white GEO matte chrome zonyx matte chrome


ORDERING CODE

Follow the steps to specify your fixture, example:
MLED - 30K - 90 - 504 - MC - P

NOTES

1. For LED info see page 2.
2. Canopy matches the finish chosen.
3. Cable info: 22ga Type SVT Cable. 0.120" outer diameter. Rated to 300V & 105°C.

MOUNTING OPTIONS

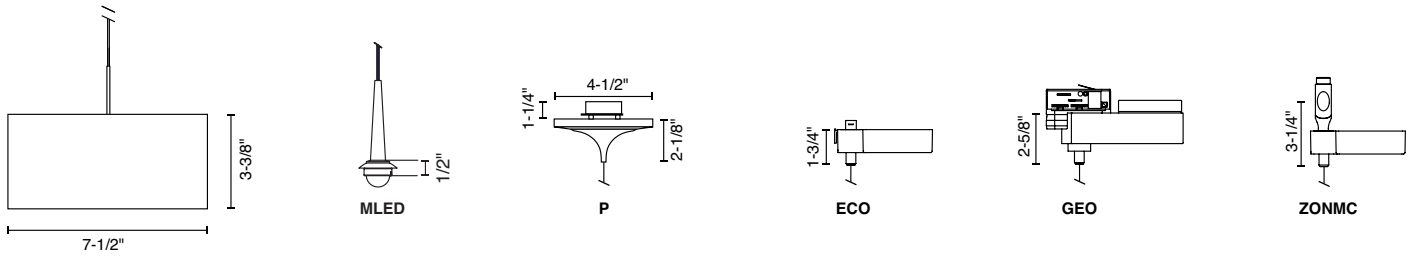

LIGHT SOURCE

Light Source	MLED - Static White LED
Performance	
LED	Cree XHP50
Lumens	450lm
CCT	3000K or 3500K
SDCM	2-Step MacAdam Ellipse
CRI	>90
Lumen Maintenance	$L_{70} > 145,000$ hours
Technical Specs	
Socket Listing	<ul style="list-style-type: none"> • Integrated LED module • ETLus Listed to UL1598, and UL1574 (Suitable for dry locations only) • cETL Listed to CSA C22.2 #250.0 and #9.0
Mounting	
Canopy	<ul style="list-style-type: none"> • 120-277Vac, 50/60Hz input • 7.0W, 7.5VA • Tri-mode dimming (Triac, ELV and 0-10V) • Mount to 3-1/2" to 4" round J-Box • Short circuit protection • Thermal protection
Line Voltage Track	<ul style="list-style-type: none"> • 120Vac, 50/60Hz input • 7.0W, 7.5VA • Triac and ELV phase dimming • Connects to line voltage adapter (ECO, GEO, Zonyx)
Warranty	
	<ul style="list-style-type: none"> • 5 year limited fixture warranty