



### T8/T5 - 2' X 2' FLUORESCENT RECESSED VOLUMETRIC (HIGH EFFICIENCY LUMINAIRE)

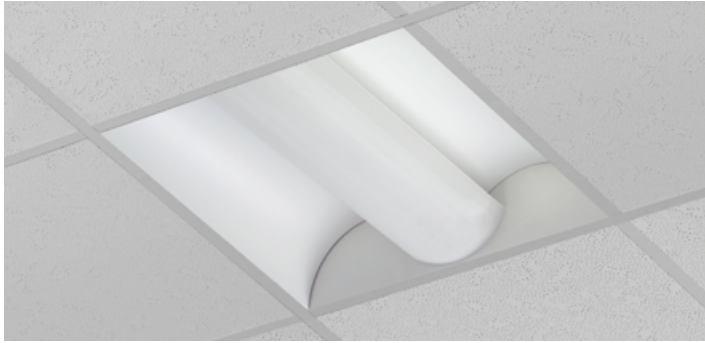

#### APPLICATION:

Ideal for any application which requires high-efficiency lighting with minimum energy consumption such as educational institutions, office spaces, health care facilities, office complexes, and retail stores.

#### PRODUCT FEATURES:

- Proprietary "wide-beam high transmission" frosted lens design, delivers uniform illumination that creates a balance in the entire volume of a space (compared to perforated metal baskets with white overlays)
- Enclosed linear prismatic lens fully encapsulates lamp and ballast compartment and protects against any foreign objects entering electrical compartment, eliminating the need for dust cover
- Highly efficient and translucent acrylic frosted lens
- Reflected light from engineered white sloping interior fixture reflectors provide a secondary wide-beam distribution angle to deliver exceptionally high total fixture efficiency performance
- Performance maximized for highest efficiency while preventing lamp injury
- Soft white paint maximizes distribution and provides visual comfort
- Supplied standard with Philips Advance or Universal ballast

- All sides and corners are turned in and hemmed, removing sharp edges for safe handling and installation, includes built-in earthquake tabs
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)
- NEC required ballast disconnect is standard

#### LISTING

UL/C-UL listed to US and Canadian standards

#### WARRANTY

Guaranteed for one year against mechanical defects

Patent Number: 8,360,620

### Ordering Information > Example: 22-ODVH-2-17-T8-ADV-10-MVOLT

22	ODVH								
----	------	--	--	--	--	--	--	--	--

FIXTURE SIZE	TRIM TYPE	VOLTAGE <sup>2</sup>	# OF BALLAST	BALLAST FACTOR	LAMP INSTALLED
22-2' X 2'	(Blank) Grid (Consult factory for Slot T mounting option)	(Blank) - MVOLT (120/277) 120 277 347	(Blank) - 1 Ballast 2 - 2 Ballasts	(Blank) - Normal BF HBF - High BF LBF - Low BF	(Blank) - No lamp L30K - 3000K L35K - 3500K L41K - 4100K L50K - 5000K
SERIES	# OF LAMPS/LAMP TYPE	*MASTER/SATELLITE			
ODVH-Oracle Volumetric High Efficiency Series	<b>1-17-T8</b> (1 lamp/17W/T8) <b>2-17-T8</b> (2 lamps/17W/T8) <b>3-17-T8</b> (3 lamps/17W/T8) <b>1-14-T5</b> (1 lamp/14W/T5) <b>2-14-T5</b> (2 lamps/14W/T5) <b>3-14-T5</b> (3 lamps/14W/T5) <b>1-24-T5HO</b> (1 lamp/24W/T5HO) <b>2-24-T5HO</b> (2 lamps/24W/T5HO) <b>3-24-T5HO</b> (3 lamps/24W/T5HO) <b>1-40-BX</b> (1 lamp/40W/BX TT) <b>2-40-BX</b> (2 lamps/40W/BX TT) <b>3-40-BX</b> (3 lamps/40W/BX TT)	<b>MAS1</b> -Master fixture w/ 1 ballast & 11 ft. flex <b>MAS2</b> -Master fixture w/ 2 ballast & 11 ft. flex <b>SAT</b> -Satellite fixture w/o ballast <i>*must be ordered separately</i> <i>EX: 22-ODVH-2-17-T8-MAS2 and 22-ODVH-2-17-T8-SAT</i> <i>*Available only with 2 or 3 lamps T8 only. Dimming option is not available when ordering Master/Satellite.</i>			

(For other lamp type, please consult factory)

BALLAST CONFIGURATION & CODE				
17W/T8	14W/T5	24W/T5HO	40W/BX	DESCRIPTION
(Blank)	-	-	(Blank)	Electronic Instant Start
EPS	(Blank)	(Blank)	EPS	Electronic Program Start
ADV-7	-	-	-	Advance Mark-7 <sup>2</sup>
ADV-10	-	ADV-10	ADV-10	Advance Mark-10 <sup>2</sup>
-	-	-	-	Advance Optanium <sup>2</sup>
ADV-ESS	-	-	-	Advance Essential <sup>2</sup>
ADV-ROVR <sup>1</sup>	-	-	-	Advance Rover <sup>2</sup>
-	-	-	-	Lutron Ecosystem H-Series <sup>2</sup>
-	-	-	-	Lutron Tu-Wire <sup>2</sup>
LUT-EC5 <sup>1</sup>	LUT-EC5 <sup>1</sup>	LUT-EC5	LUT-EC5	Lutron Ecosystem <sup>2</sup>
LUT-EC3	LUT-EC3 <sup>1</sup>	LUT-EC3	LUT-EC3	Lutron Eco-10 <sup>2</sup>
-	-	-	-	Lutron Tve <sup>2</sup>
LUT-H3D	LUT-H3D <sup>1</sup>	LUT-H3D	LUT-H3D	Lutron Hi-Lume 3D <sup>2</sup>
-	-	-	-	Lutron Ecosystem (347V Only) <sup>2</sup>

1- Requires 2 Ballasts for 3 or more lamps  
2- Voltage must be specified for dimming ballast.

EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)	
ORDER CODE	DESCRIPTION
EMG-T8-BX-450	Up to 450 L. for T8 or BX
EMG-T8-BX-600	Up to 600 L. for T8 or BX
EMG-T8-BX-700	Up to 700 L. for T8 or BX
EMG-T8-BX-1400	Up to 1400 L. for T8 or BX
EMG-T5-520	Up to 520 L. for T5
EMG-T5-T5HO-700	Up to 700 L. for T5 or T5HO
EMG-T5-T5HO-1300	Up to 1300 L. for T5 or T5HO
EMG-T8-BX-T5-T5HO-3200	Up to 3200 L. for T8, BX, T5 or T5HO
EMG-SD-T8-BX-T5-T5HO-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO
EMG-ICE-T8-BX-T5-T5HO-1400	ICE Pack 1400 L. for T8, BX, T5 or T5HO
GTD	Generator Transfer Device

MANY OTHER BODINE AND IOTA EMERGENCY PACKS ARE AVAILABLE. PLEASE CONSULT FACTORY. VISIT WWW.BODINE.COM OR WWW.IOTAENGINEERING.COM FOR MORE DETAILS.

OTHER OPTIONS	
22FK	- Flange Kit for 2' X 2' Fixture
C3	- 6' 3-wire Flex Cable (Single Circuit)
C4	- 6' 4-wire Flex Cable (Double Circuit)
FBF	- Internal Fast Blow Fuse
SBF	- Internal Slow-Blow Fuse
RIS	- Radio Interference Suppressor
USA	- Made in America Compliance

T5/T8  
2'X2'  
ODVH

Fluorescent Recessed Volumetric