
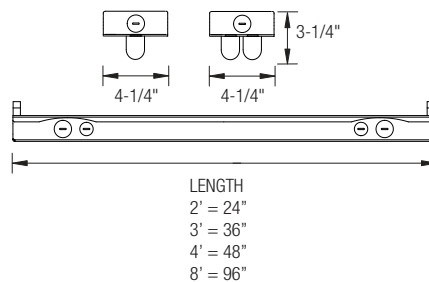


**T8 FLUORESCENT STRIP
(1 OR 2 LAMP)**

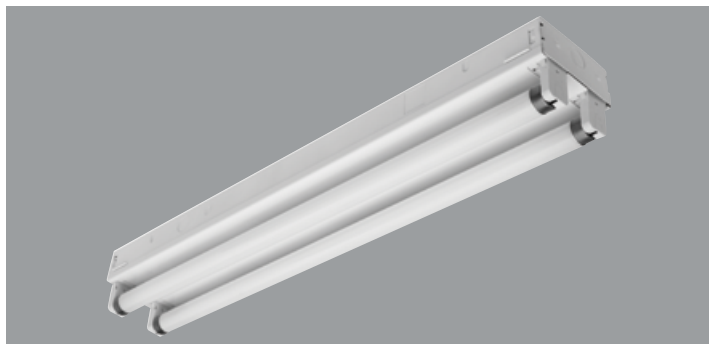

PRODUCT FEATURES:

- Heavy-duty 20-gauge steel for durability and code compliance
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Painted with a high-gloss baked white enamel
- Shallow design is ideal for commercial and industrial spaces requiring general illumination
- Suitable for dry and damp environments
- Thermally protected, self-resetting, Class P, NPF, non-PCB and UL listed ballast
- Suitable for surface or suspended mounting
- Individual or continuous row mounting
- Lightweight design enables for quick, easy installation
- Quarter-turn fastener secures ballast cover to housing
- NEC required ballast disconnect is standard
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

LISTING

UL/C-UL listed to US and Canadian standards

WARRANTY

Guaranteed for one year against mechanical defects

T8
OC

Ordering Information > Example: 2-OC-2-17-T8-MVOLT-EMG-T8-BX-700

2	OC						
----------	-----------	--	--	--	--	--	--

FIXTURE SIZE	SERIES	WATTAGE	VOLTAGE ²	# OF BALLAST	BALLAST FACTOR
2- 2'	OC-Oracle Channel Open Strip	2' FIXTURE 1-17-T8 (1 Lamp/17W/T8) 2-17-T8 (2 Lamps/17W/T8)	(Blank)- MVOLT (120/277) 120 277 347	(Blank)- 1 Ballast 2- 2 Ballasts	(Blank)- Normal BF HBF- High BF LBF- Low BF

REMOTE EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)	
ORDER CODE	DESCRIPTION
EMG-T8-BX-450	Up to 450 L. for T8 or BX
EMG-T8-BX-600	Up to 600 L. for T8 or BX
EMG-T8-BX-700	Up to 700 L. for T8 or BX
EMG-T8-BX-1400	Up to 1400 L. for T8 or BX
EMG-T8-BX-T5-T5HO-3200	Up to 3200 L. for T8, BX, T5 or T5HO
EMG-SD-T8-BX-T5-T5HO-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO
EMG-ICE-T8-BX-T5-T5HO-1400	ICE Pack 1400 L. for T8, BX, T5 or T5HO
GTD	Generator Transfer Device

BALLAST CONFIGURATION & CODE	
17W/T8	DESCRIPTION
(Blank)	Electronic Instant Start
EPS	Electronic Program Start
ADV-7	Advance Mark-7 ²
ADV-10	Advance Mark-10 ²
-	Advance Optanium ²
ADV-ESS	Advance Essential ²
ADV-ROVR	Advance Rover ²
-	Lutron Ecosystem H-Series ²
-	Lutron Tu-Wire ²
LUT-EC5	Lutron Ecosystem ²
LUT-EC3	Lutron Eco-10 ²
-	Lutron Tve ²
LUT-H3D	Lutron Hi-Lume 3D ²
-	Lutron Ecosystem (347V Only) ²

WIRING OPTIONS	
C3	- 6' 3-wire Flex Cable (Single Circuit)
C4	- 6' 4-wire Flex Cable (Double Circuit)
FBF	- Internal Fast Blow Fuse
SBF	- Internal Slow-Blow Fuse
RIS	- Radio Interference Suppressor

OTHER OPTIONS	
20CWG	- 2' Wireguard
30CWG	- 3' Wireguard
40CWG	- 4' Wireguard
80CWG	- 2X4' Wireguards
OCMS	- Motion Sensor
OCVH	- V Hook and Chain Kit
OCGSS	- Cable Gripper Suspension Kit
USA	- Made in America Compliance

1- Requires 2 Ballasts for 4-lamps.
2- Voltage must be specified for dimming ballast.

2' Fluorescent Strip