



### T5 SLIM HIGH PERFORMANCE ARCHITECTURAL COVE LUMINAIRE (2 LAMP)

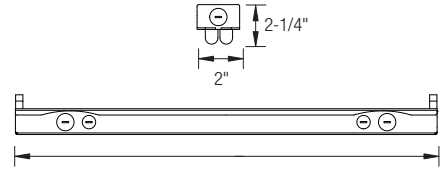

LENGTH  
2' = 22-1/2"  
3' = 34-3/8"  
4' = 46-3/16"  
5' = 58"

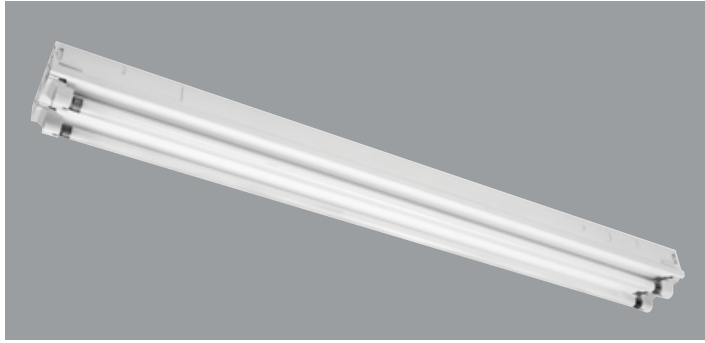

#### APPLICATION:

Ideal for coves, shelves, displays or any other retail applications.

#### PRODUCT FEATURES:

- Exclusively designed for the T5 lamp, the OST5 utilizes small T5 sockets and T5 ballasts
- 2', 3' & 4' housings are designed to be surface, chain, or cable mounted in continuous rows or individually
- Multiple knockouts allow for top side and back mounting
- Heavy-duty 20-gauge steel utilized throughout for durability and code compliance
- Post-painted to insure against exposed metal surfaces
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Exclusive T5 socket features rotating collar and enclosed contacts
- Row mounting coupler supplied with all luminaires
- Lightweight design enables for quick, easy installation
- Thermally protected, re-setting, Class P NPF, non-PCB and UL listed ballast
- Suitable for dry and damp environments
- NEC required ballast disconnect is standard

#### LISTING

UL/C-UL listed to US and Canadian standard

#### WARRANTY

Guaranteed for one year against mechanical defects  
Specifications subject to change without notice.

T5  
OST5

#### Ordering Information > Example: 2-OST5-2-14-T5-MVOLT-EMG-T5-T5HO-700

2	OST5	2							
FIXTURE SIZE	SERIES	LAMPS	WATTAGE		VOLTAGE	# OF BALLAST	BALLAST FACTOR		
2'-2"	OST5-Oracle T5 Low Profile Reflector Strip	2	22" FIXTURE 14-T5 (2 lamps/14W/T5) 24-T5HO (2 lamps/24W/T5HO)		(Blank)- 120 MVOLT- 120/277 277- 277 347- 347	(Blank)- 1 Ballast	(Blank)- Normal BF		
<b>REMOTE EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)</b>									
ORDER CODE					DESCRIPTION				
EMG-T5-T5HO-700					Up to 700 L. for T5 or T5HO				

BALLAST CONFIGURATION & CODE		
14W/T5	24W/T5HO	DESCRIPTION
-	-	Electronic Instant Start
(Blank)	(Blank)	Electronic Program Start

Consult Factory for ADVANCE or LUTRON dimming ballast options.

WIRING OPTIONS	
C3	- 6' 3-wire Flex Cable (Single Circuit)
C4	- 6' 4-wire Flex Cable (Double Circuit)
FBF	- Internal Fast Blow Fuse
SBF	- Internal Slow-Blow Fuse
RIS	- Radio Interference Suppressor

OTHER OPTIONS	
OST5WG	- Wireguard
USA	- Made in America Compliance

2' Fluorescent Slim Architectural Cove Luminaire