


### T8 LOW PROFILE FLUORESCENT STAGGERED COVE LUMINAIRE (2 LAMP T8)

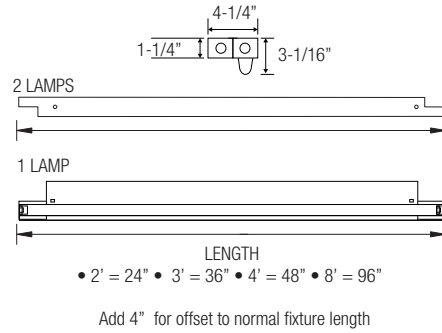

#### APPLICATION:

Staggered lamp fixtures are designed for use in cove, recessed slot, or luminous ceiling applications. Staggering the lamps provides for uniform illumination that eliminates shadows and/or hot spots: • Lobbies • Restaurants • Restrooms • Office buildings • Hallways • Airports • Retail spaces • Conference rooms

#### PRODUCT FEATURES:

- Combine various fixture lengths for row configurations
- Fixture channel is offset in order to provide smooth illumination without shadowing
- Die-formed, code-gauge, cold-rolled steel
- Post-painted to insure against exposed metal surfaces
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Shallow design is ideal for commercial spaces requiring cove illumination
- Suitable for dry and damp environments
- Thermally protected, self-resetting, Class P, NPF, non-PCB and UL listed ballast
- Individual or continuous row mounting
- NEC required ballast disconnect is standard
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

#### LISTING

UL/C-UL listed to US and Canadian standard

#### WARRANTY

Guaranteed for one year against mechanical defects

T8  
OSTG

#### Ordering Information > Example: 2-OSTG-2-17-T8-MVOLT-EMG-T8-BX-700

| 2            | OSTG                        | 2     |                              |   |                                     |   |  |  |  |
|--------------|-----------------------------|-------|------------------------------|---|-------------------------------------|---|--|--|--|
| FIXTURE SIZE | SERIES                      | LAMPS | WATTAGE                      | VOLTAGE <sup>1</sup>                          | # OF BALLAST                        | BALLAST FACTOR                                    |  |  |  |
| 2'-2'        | OSTG-Oracle Staggered Strip | 2     | 2' FIXTURE<br>17-T8 (17W/T8) | (Blank)- MVOLT (120/277)<br>120<br>277<br>347 | (Blank)- 1 Ballast<br>2- 2 Ballasts | (Blank)- Normal BF<br>HBF- High BF<br>LBF- Low BF |  |  |  |

| BALLAST CONFIGURATION & CODE |   |
|------------------------------|---|
| 17W/T8                       | DESCRIPTION                               |
| (Blank)                      | Electronic Instant Start                  |
| EPS                          | Electronic Program Start                  |
| ADV-7                        | Advance Mark-7 <sup>1</sup>               |
| ADV-10                       | Advance Mark-10 <sup>1</sup>              |
| -                            | Advance Optanium <sup>1</sup>             |
| ADV-ESS                      | Advance Essential <sup>1</sup>            |
| ADV-ROVR                     | Advance Rover <sup>1</sup>                |
| -                            | Lutron Ecosystem H-Series <sup>1</sup>    |
| -                            | Lutron Tu-Wire <sup>1</sup>               |
| LUT-EC5                      | Lutron Ecosystem <sup>1</sup>             |
| LUT-EC3                      | Lutron Eco-10 <sup>1</sup>                |
| -                            | Lutron Tve <sup>1</sup>                   |
| LUT-H3D                      | Lutron Hi-Lume 3D <sup>1</sup>            |
| -                            | Lutron Ecosystem (347V Only) <sup>1</sup> |

<sup>1</sup>- Voltage must be specified for dimming ballast.

| REMOTE EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS) |  |
|---|--|
| ORDER CODE  | DESCRIPTION                                    |
| EMG-T8-BX-450                                       | Up to 450 L. for T8 or BX                      |
| EMG-T8-BX-600                                       | Up to 600 L. for T8 or BX                      |
| EMG-T8-BX-700                                       | Up to 700 L. for T8 or BX                      |
| EMG-T8-BX-1400                                      | Up to 1400 L. for T8 or BX                     |
| EMG-SD-T8-BX-T5-T5HO-1400                           | Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO |
| EMG-ICE-T8-BX-T5-T5HO-1400                          | ICE Pack 1400 L. for T8, BX, T5 or T5HO        |
| GTD   | Generator Transfer Device                      |

| WIRING OPTIONS |   |
|----------------|---|
| C3             | - 6' 3-wire Flex Cable (Single Circuit) |
| C4             | - 6' 4-wire Flex Cable (Double Circuit) |
| FBF            | - Internal Fast Blow Fuse               |
| SBF            | - Internal Slow-Blow Fuse               |
| RIS            | - Radio Interference Suppressor         |

| OTHER OPTIONS |                              |
|---------------|------------------------------|
| USA           | - Made in America Compliance |

| REFLECTOR OPTIONS |  |
|-------------------|--|
| Refer to page 275 |  |

2' Low Profile Fluorescent Staggered