



**SUGGESTED USE**

For areas where smooth and wide light distribution is needed. Ideal for building facades, security, recreation facilities, parking lots, signs, and displays.

**CONSTRUCTION**

Die-cast aluminum corrosion-proof housing. The one-piece silicone gasket effectively limits outside contaminants by sealing off the optical chamber.

**FINISH** - Dark bronze corrosion-resistant polyester powder finish is standard.

**LENS** - Clear, heat- and impact-resistant tempered glass lens.


**INSTALLATION** - Fixtures offer an adjustable knuckle with 1/2" NPT threads for easy mounting to boxes or adapters. Bottom feed wiring.

**LAMP** - T5/T5HO Fluorescent and LED.

All specifications are subject to change without notice



**Dimensions:**

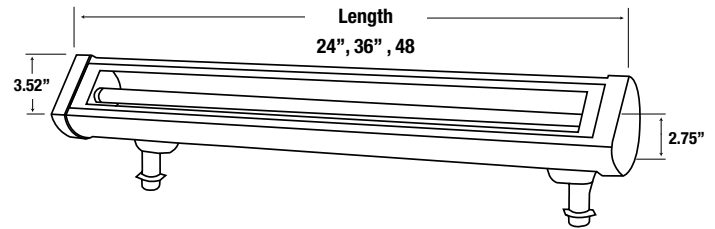

**Ordering Guide > Example: 2-OWG-LED-18W-120V-BZ**

<b>2</b>	<b>OWG</b>				
<b>FIXTURE SIZE</b>	<b>SERIES</b>	<b>LAMP TYPE/WATTAGE</b>	<b>VOLTAGE</b>	<b>COLOR</b>	<b>OPTION</b>
2 - 2' 3 - 3' 4 - 4'	OWG - Oracle Wall Glazer	<b>LED</b> <b>2' FIXTURE</b> LED-18W - 18W - LED <b>4' FIXTURE</b> LED-37W - 37W - LED <b>CFL</b> <b>2' FIXTURE</b> 1-14-T5 - 14W - T5 1-24-T5HO - 24W - T5HO <b>3' FIXTURE</b> 1-21-T5 - 21W - T5 <b>4' FIXTURE</b> 1-28-T5HO - 28W - T5HO	120V	BZ - Bronze	LV-56 - Ground mounting spike