

INTENDED USE:

- For use in residential, commercial and hospitality markets
- For wall or vanity application

PRODUCT FEATURES:

- Comes standard with 120V ballast
- Ballast is normal power factor with end of life protection
- Available in clear prismatic lens
- Individually boxed
- Diffuser easily removed by sliding end caps
- Post-painted body and hemmed edges allow for safe handling and installation
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

LISTING


UL/C-UL listed to US and Canadian standard

WARRANTY

Guaranteed for one year against mechanical defects

T8
B

Ordering Information > Example: 4-OW3B-2-32-T8-120-EMG-T8-BX-700

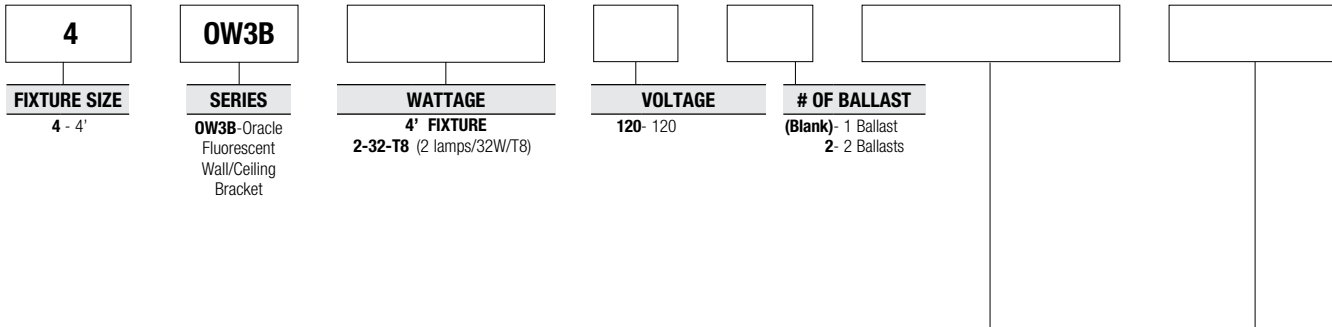

EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)	
ORDER CODE	DESCRIPTION
EMG-T8-BX-450	Up to 450 L. for T8 or BX
EMG-T8-BX-600	Up to 600 L. for T8 or BX
EMG-T8-BX-700	Up to 700 L. for T8 or BX
EMG-T8-BX-1400	Up to 1400 L. for T8 or BX
EMG-SD-T8-BX-T5-T5HO-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO
EMG-ICE-T8-BX-T5-T5HO-1400	ICE Pack 1400 L. for T8, BX, T5 or T5HO
GTD	Generator Transfer Device

* 2' = For T8 only 450 L available

OTHER OPTIONS	
USA	- Made in America Compliance