


T8/T5 - 8' VAPOR TIGHT, IP65 WET LOCATION LUMINAIRE
(1 OR 2 LAMP 8') OR (2 OR 4-LAMP 8' TANDEM)

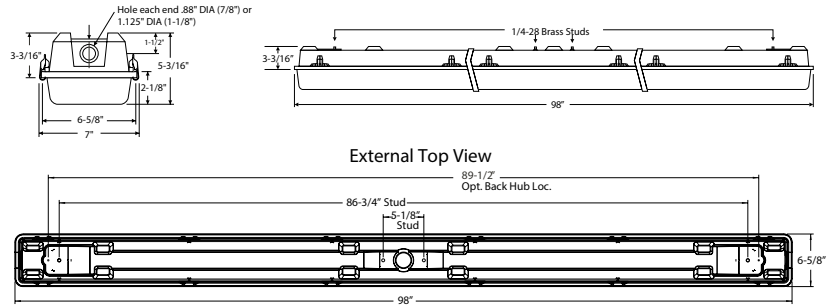

APPLICATION:

The OW1IP series is suitable for wet location areas. Common applications include parking garages, schools, industrial facilities, and stairways.

PRODUCT FEATURES:

Suitable for suspension by chain, cable or pendant and can be surface mounted. All required hardware and mounting brackets are included. Integral molded-latch retention pockets securely locks in polycarbonate latches. Suspension systems are not included. Chain or stainless steel cable are available as options. Stainless steel latches available upon request.

STRUCTURALLY RIGID FIBERGLASS BODY

Fiberglass is reinforced polyester and self-extinguishing (ASTM D635-74). This type of construction prevents the body from flexing during handling and installation.

GASKETED DIFFUSER RETENTION SLOT

- The gasketed inverted-U slot provides a positive continuous seal between body and diffuser
- Continuous-poured gasket completely fills channel for maximum seal integrity

HIGH-IMPACT ACRYLIC/DR DIFFUSER

- Internal crepe pattern allows a smooth exterior surface for ease of cleaning
- The diffuser flange fits snugly into the gasketed retention slot forming a continuous seal
- Optional 95% reflective silver reflector
- CEE qualified ballast comes standard on most fixture options

LISTING

- UL/C-UL listed to US and Canadian standard
- IP65 Rating

WARRANTY

Guaranteed for one year against mechanical defects



Ordering Information > Example: 8-OW1IP-2-32-T8-ADV-10-MVOLT

8	OW1IP							
FIXTURE SIZE	SERIES	# OF LAMPS/LAMP TYPE	VOLTAGE ²	# OF BALLAST	BALLAST FACTOR	LAMP INSTALLED		
8- 8'	OW1IP- Oracle Wet Location Vapor Tight	1-59-T8 (1 lamp/59W/T8) 2-59-T8 (2 lamps/59W/T8) 3-59-T8 (3 lamps/59W/T8) 2-32-T8 (2 lamps/32W/T8) 3-32-T8 (3 lamps/32W/T8) 4-32-T8 (4-lamps/32W/T8) 2-28-T5 (2 lamps/28W/T5) 3-28-T5 (3 lamps/28W/T5) 4-28-T5 (4-lamps/28W/T5) 2-54-T5HO (2 lamps/54W/T5HO) 3-54-T5HO (3 lamps/54W/T5HO) 4-54-T5HO (4-lamps/54W/T5HO)	(Blank) - MVOLT (120/277) 120 277 347 480	(Blank) - 1 Ballast 2 - 2 Ballasts	(Blank) - Normal BF HBF - High BF LBF - Low BF	(Blank) - No lamp L30K - 3000K L35K - 3500K L41K - 4100K L50K - 5000K		

BALLAST CONFIGURATION & CODE				
32W/T8	59W/T8	28W/T5	54W/T5HO	DESCRIPTION
(Blank)	(Blank)	-	-	Electronic Instant Start
EPS	EPS	(Blank) ¹	(Blank)	Electronic Program Start
ADV-7	-	-	ADV-7 ¹	Advance Mark-7 ²
ADV-10 ¹	-	-	ADV-10 ¹	Advance Mark-10 ²
-	-	ADV-OPT	-	Advance Optanium ²
ADV-ESS ¹	-	-	-	Advance Essential ²
ADV-ROVR	-	-	ADV-ROVR ¹	Advance Rover ²
LUT-EHD ¹	-	LUT-EHD ¹	LUT-EHD ¹	Lutron Ecosystem H-Series ²
LUT-2W ¹	-	-	-	Lutron Tu-Wire ²
LUT-EC5 ¹	-	LUT-EC5 ¹	-	Lutron Ecosystem ²
LUT-EC3 ¹	-	LUT-EC3 ¹	LUT-EC3 ¹	Lutron Eco-10 ²
LUT-TVE ¹	-	-	-	Lutron Tve ²
LUT-H3D ¹	-	LUT-H3D ¹	LUT-H3D ¹	Lutron Hi-Lume 3D ²
-	-	-	LUT-ECD ¹	Lutron Ecosystem (347V Only) ²

1- Requires 2 Ballasts for 4-lamps.
2- Voltage must be specified for dimming ballast.

EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)	
ORDER CODE	DESCRIPTION
EMG-T8-BX-450	Up to 450 L. for T8 or BX
EMG-T8-BX-600	Up to 600 L. for T8 or BX
EMG-T8-BX-700	Up to 700 L. for T8 or BX
EMG-T8-BX-1400	Up to 1400 L. for T8 or BX
EMG-T5-T5HO-700	Up to 700 L. for T5 or T5HO
EMG-T5-T5HO-1300	Up to 1300 L. for T5 or T5HO
EMG-SD-T8-BX-T5-T5HO-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO
EMG-ICE-T8-BX-T5-T5HO-1400	ICE Pack 1400 L. for T8, BX, T5 or T5HO
GTD	Generator Transfer Device

WIRING OPTIONS	
PCSB120	- 10' Nema 5-15R 120V Straight Blade Plug
PCSB277	- 10' Nema 7-15R 277V Straight Blade Plug
PCTL120	- 10' Nema L5-15R 120V Twist Lock Plug
PCTL277	- 10' Nema L7-15R 277V Twist Lock Plug
IPTL120	- 10' 120V IP Rated Twist lock Plug
IPTL277	- 10' 277V IP Rated Twist lock Plug
S01	- 10' 120V/277V S0 Cord
S02	- 10' 480V S0 Cord

(Consult Factory for 208V, 248V, 347V and 480V wiring)

OTHER OPTIONS	
CH	- Heavy Duty Chain
MS	- Motion Sensor (Damp location only)
MSPH	- Motion Sensor with Photocell
GSS	- Gripple Suspension System
VH	- V Hook
SSL	- Stainless Steel Latches
OW1IPSR	- Specular Reflector
SSLTP	- Stain Steel Latches with Tamper-proof
PCLTP	- Polycarbonate Latches with Tamper-proof Screws
USA	- Made in America Compliance

T8/T5 OW1IP

Wet Location 8' Vapor Tight Fluorescent