

Specifications of LED Instant Flexilight:

Structure	Voltage	Max. Loading Length (Color)	Cutting Unit (Color)	Bulb Spec.	Number of Bulbs/Unit	Wattage
	110-120V	600' (WW, CW, B, G)	40" (WW, CW, B, G)	LED	36	0.8W/foot
		900' (R, Y)	54" (R, Y)	LED	54	0.53W/foot
	24V	100' (WW, CW, B, G)	6" (WW, CW, B, G)	LED	6	0.88W/foot
		200' (R, Y)	4" (R, Y)	LED	12	0.44W/foot
	12V	50' (WW, CW, B, G)	3" (WW, CW, B, G)	LED	6	0.88W/foot
		100' (R, Y)	6" (R, Y)	LED	12	0.44W/foot

Packages Available

Item Number	Length	Package
ER-LED-120-150	150'	/Roll
ER-LED-24-150	150'	/Roll
ER-LED-12-150	150'	/Roll

No Driver Required/ Rectifier Included

ER-LED - 120 - 150 - COLOR

Item No. Voltage Length Specify color

(Available in 150' Rolls only, no custom cut)

NOTE: Each Roll Includes; 3pcs ERIFL-XXX Power Cords, 3pcs F4 End Caps


NOTE:	Cat#	LED Voltage	LED Length	Max. Wattage
LED Magnetic Transformer	M100L-12-DC	12V	50'	75w
	M100L-24-DC	24V	100'	100w

LED Instant Flexilight Accessories:

- ERIFL-F106 -120V LED Flexilight 6ft. Power Cord w/ Power Connector
- ERIFL-F107 -24V LED Flexilight 6ft. Power Cord w/ Power Connector
- ERIFL-F107 -12V LED Flexilight 6ft. Power Cord w/ Power Connector



- F4 LED Flexilight End Caps
- F5 LED Flexilight Tie Strap
- F6 LED Flexilight Mounting Clip
- F7 LED Flexilight Suction Cup
- F8 LED Flexilight 6 ft. Channel
- F10 LED Flexilight Y-Cable Connector
- F14 Housing Clam for Splice Connector
- F103 LED Flexilight PVC Connector
- F22 LED Flexilight PVC T-Connector
- F23 LED Flexilight PVC X-Connector

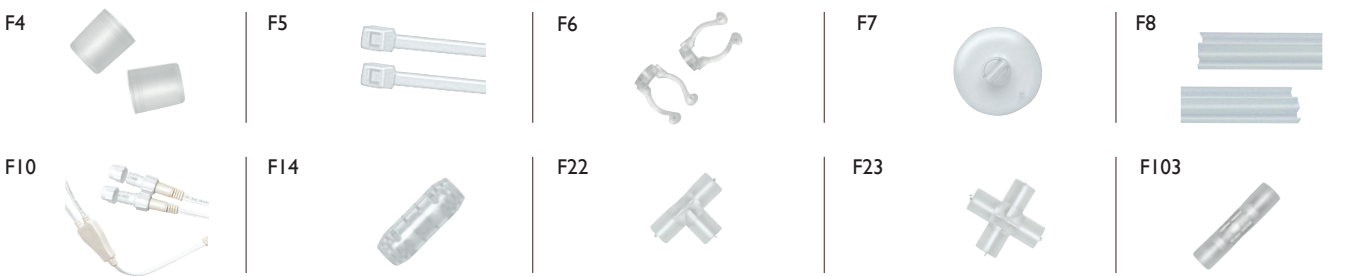

FLEXIBLE ROPELIGHT

Due to the changes of constant improvement in lighting technology, all details are subject to change without notice. Consult factory for up to date information.