


PAR30 LUMINAIRE

JOB NAME:

TYPE:



**ADJUSTABILITY FUNCTION**

The Fusion fixture tilt 45° and rotate 90° for making setting consistent simple and effort-less.

**DESCRIPTION:**

Fusion FC multi-lamp luminaires are ideal for downlighting, accenting or a combination of both in any retail, hospitality, lobby, residential or commercial space. It's unique double gimbal mechanisms locks in position to assure the perfect ambiance and design at all times.

**HOUSING:**

Thermally protected, specification grade multi-lamp recessed luminaire. It is designed for new construction non-insulated ceilings or where insulation can be kept 3" from housing. It is available in 1, 2, 3 and 4 lamp linear, and 3 lamp corner or 4 lamp square configuration. It is fabricated in 18 gauge steel and post painted. The housing is vented for maximum heat dissipation and cool operation.

**TRIM OPTION:**

Post painted powder coated Die-Cast trim ring is available in white. Please consult factory for custom paint color options.

**TRIM- LESS:**

All steel perforated meshcover intended for installation in drywall or plaster ceilings. Mudding may be applied right up to the edge of the fixture opening to provide seamless appearance.

**AIMING:**

Fusion FC multi-lamp luminaires are have full adjustable aiming capability which allows the double gimbal mechanism to rotate 359° and pivot 90° and lock in place at the desired position.

**ELECTRICAL:**

Junction box and transformer may be accessed from below the ceiling. Junction Box is Listed for through branch circuit wiring, 12 AWG 90° C supply Conductors, and has four 1/2" KOs, one 3/4" KO and four Romex knockouts with true pry-out slots and strain clamps. De-rated lamp wattage labeling is available, please consult factory.

**LAMPS:**

Each lamp holder can individually be removed and lamped from the front. Each lamp holder may be locked in position separately.

**MOUNTING:**

Is constructed from 18-gauge steel and can be adjusted vertically. May be installed with 3/4" or 1-1/2" lathing channel, 1/2" EMT, or optional C-Channel mounting bars are available.

**ACCESSORIES:**

The perfect lighting ambience may be accomplished by utilizing the optical accessories available for Fusion FC multi-lamp luminaires.

**LABELS:**

c-UL-us listed for Damp location.  
c-UL-us listed for feed Through Wiring.

**WARRANTY:**

Fusion FC multi-lamp luminaires are covered by Fusion's one year limited warranty. As a system, we stand behind our entire products from housing to bar hangers.

**ORDERING INFORMATION**


SERIES	TYPE	WATTAGE	VOLTAGE	FLANGE OPTION	TRIM	INTERIOR COLOR
FC1-INC FC2-INC FC3-INC FC4-INC FCL-INC FCX-INC	N - (New Construction)	75W-PAR30	120V 277V	F - (Flanged) T - (Trimless)	WH - (White)	BK - (Black)

PAR30 LUMINAIRE

JOB NAME:

TYPE:


- A = 13-1/2"
- B = 8-1/2"
- C = 8-3/8"
- D = 17"
- E = 8-1/2"
- F = 7-1/2"
- G = 6-1/2"
- H = 5-5/8"

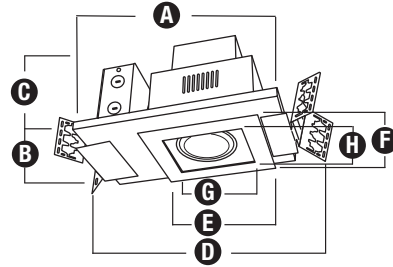

FC1-INC

DIMENSION


- A = 19-3/8"
- B = 8-1/2"
- C = 8-1/4"
- D = 22-7/8"
- E = 14-3/8"
- F = 7-1/2"
- G = 12-3/8"
- H = 5-5/8"

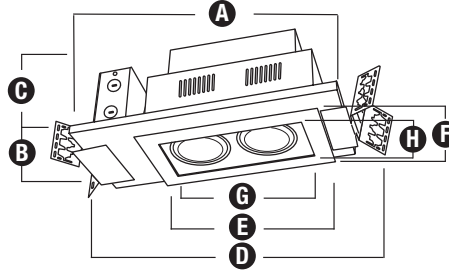

FC2-INC

DIMENSION


- A = 25-1/4"
- B = 8-1/2"
- C = 8-3/8"
- D = 28-3/4"
- E = 20-1/4"
- F = 7-1/2"
- G = 18-1/4"
- H = 5-5/8"

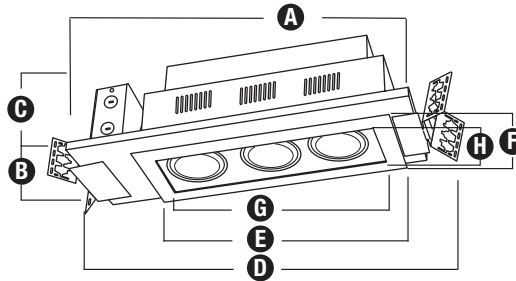

FC3-INC

DIMENSION


- A = 31-1/8"
- B = 8-1/2"
- C = 8-3/8"
- D = 34-5/8"
- E = 26-1/4"
- F = 7-1/2"
- G = 24-1/4"
- H = 5-5/8"

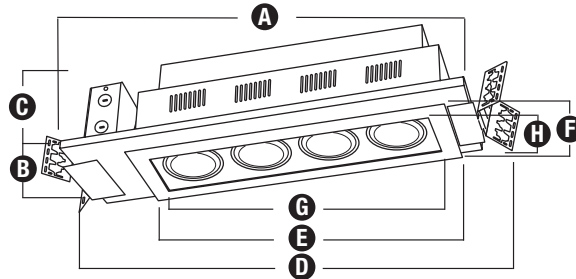

FC4-INC

DIMENSION


- A = 18-1/2"
- B = 15-3/4"
- C = 8-1/4"
- D = 22"
- E = 14"
- F = 14"
- G = 12"
- H = 12"

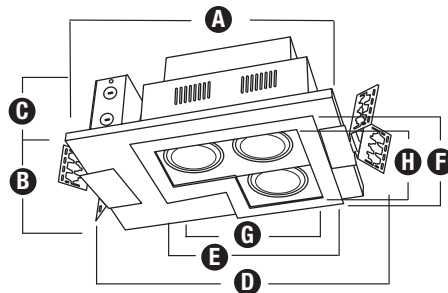

FCL-INC

DIMENSION

- A = 19-1/4"
- B = 14-3/4"
- C = 8-3/8"
- D = 22-3/4"
- E = 14-3/8"
- F = 13-5/8"
- G = 12-3/8"
- H = 11-5/8"

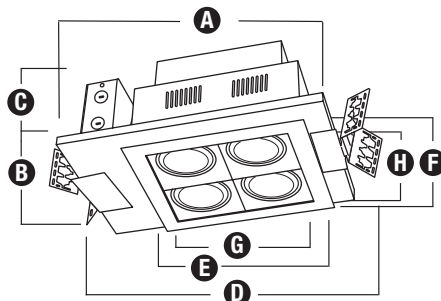

FCX-INC