




**Dimensions:**

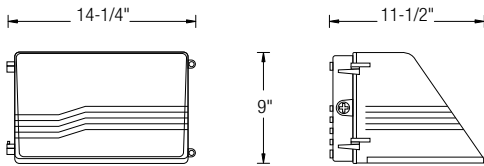

**SUGGESTED USE**

For areas where Type III distribution is required and/or Dark Sky security and facade lighting is required such as industrial buildings, universities, schools, apartment buildings, institutions, and government establishments.

**CONSTRUCTION**

Die-cast aluminum housing with hinged full cut-off front frame. The one-piece silicone gasket effectively limits outside contaminants by sealing off the optical chamber. The reflector is made of die-formed 95% specular anodized aluminum for high efficiency and Type II distribution. HID & HPS fixtures have porcelain 4KV pulse-rated medium-base socket with nickel-plated screw shell sockets. CFL fixtures have 4-pin plug-in base and standard ballast of minimum starting temperature of 0°F/-18°C. Extreme temperature ballast (XT) with -20°F/-30°C is available.

**FINISH** - Dark bronze corrosion-resistant polyester powder finish is standard

**LENS** - Frosted tempered flat glass lens.

**DISTRIBUTION** - Type III standard. For other distribution please consult factory.


**INSTALLATION** - Convenient cast-in template for easy mounting over standard 4" outlet box; or there are top, back, side 1/2" threaded hubs available for conduit entry.

**LISTINGS** - UL/C-UL for wet location.

**LAMP** - Included except for CFL option.

All specifications are subject to change without notice

**OWP-FC-201-MH-175-MVOLT**

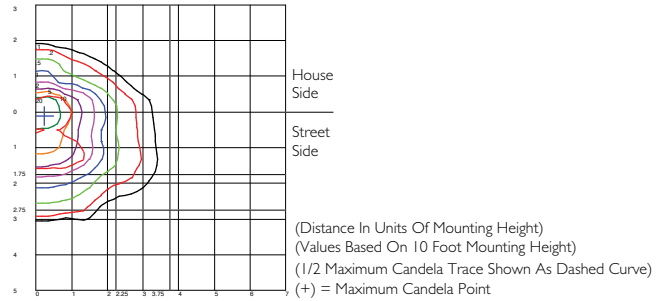

**Ordering Guide > Example: OWP-FC-201-MH-175-120-PC120-BZ**

<b>OWP-FC-201</b>					
<b>SERIES</b> OWP-FC-201	<b>WATTAGE</b> <b>HPS, MH</b> HPS-70 - (70W High Pressure Sodium) HPS-100 - (100W High Pressure Sodium) HPS-150 - (150W High Pressure Sodium) MH-70 - (70W Metal Halide) MH-100 - (100W Metal Halide) MH-150 - (150W Metal Halide) MH-175 - (175W Metal Halide) <b>CFL</b> CFL-1X26 - (1X26W Compact Fluorescent) CFL-1X32 - (1X32W Compact Fluorescent) CFL-1X42 - (1X42W Compact Fluorescent) CFL-2X26 - (2X26W Compact Fluorescent) CFL-2X32 - (2X32W Compact Fluorescent) CFL-2X42 - (2X42W Compact Fluorescent)	<b>VOLTAGE</b> <b>HPS, MH<sup>1,4</sup></b> - 120 - MVOLT (120/208/240/277) - 347 <sup>5</sup> - 480 <sup>5</sup> <b>CFL<sup>2,3,4</sup></b> - 120 - MVOLT(120/277) - 208 - 240 - 347	<b>OPTIONS</b> PC120 - Photo control (120V only) PC277 - Photo control (277V only) SF - Single fuse DF - Double fuse O-EMG-750 - 750 lum. Emg. (CFL only) XT - 20°F/-30°C Min. Temp. Bal. (CFL only)	<b>COLOR</b> BZ - Bronze WH - White	<b>ACCESSORIES</b> OWP-FC-201-RL - Replacement lens kit

**NOTES:**

1. Pulse-Start standard on all fixtures above 175W.
2. Lamps are not included for CFL.
3. Please consult factory for dimming options.
4. (Consult factory) for other wattages and options.
5. 347 & 480 Volt not available on 50 & 70W fixture.