

### Features

#### Housing

Die-cast Aluminum with Powder Coated Finish  
Finish Options: -05 Black, -30 Oil Rubbed Bronze  
Good for Wet Location Applications

#### Optical

Shade: Clear Glass

#### Electrical

120V – 277V, Built-in Photo Cell Option  
High Power Factor, Low THD

#### Lamp


Integrate LED Module: Color Temperature Option 3000K, 3500K, 4000K, 5000K

#### Certification

ETL/cETL Listed, Suitable for Wet Locations, CEC Listed

#### Warranty

5 Years Limited Warranty on Driver and LED

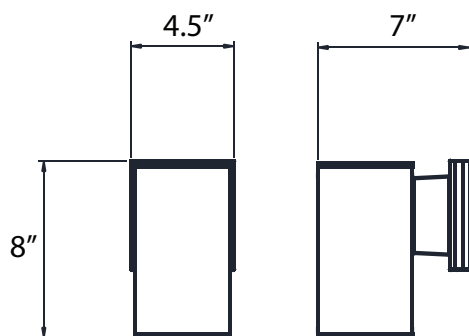

### Ordering Guide > Example: OWS-CYL-D-101-LED-750L-MVOLT-30K-BZ

OWS-CYL-D-101-LED					
SERIES	LUMENS	VOLTAGE	CCT	COLOR	ACCESSORIES
OWS-CYL-D-101-LED	750L - (750 Lumens)	MVOLT	30K - (3000K) 35K - (3500K) 40K - (4000K) 50K - (5000K)	BZ - Bronze	OWS-CYL-D-101-RL - Replacement lens kit