



SUGGESTED USE

Decorative cylindrical shape provides an architectural treatment to complement and blend with other building designs. For general lighting and wall washing of entrances, walkways, apartment buildings, parking garages, recreation facilities, underpasses, and tunnels.

CONSTRUCTION

Die-cast aluminum housing. The reflector is made of die-formed specular anodized aluminum for high efficiency. Includes removable baffle to convert fixture from downlight to up/downlight. The one-piece silicone gasket effectively limits outside contaminants by sealing off the optical chamber. HID & HPS fixtures have porcelain 4KV pulse-rated medium-base socket with nickel-plated screw shell sockets. CFL fixtures have 4-pin plug-in base and standard ballast of minimum starting temperature of 0°F/-18°C. Extreme temperature ballast (XT) with -20°F/-30°C is available.

FINISH - Dark bronze corrosion-resistant polyester powder finish is standard.

LENS - Frosted, tempered glass lens.

INSTALLATION - Must be mounted independently of outlet body.


LISTINGS - UL/C-UL for wet location.

LAMP - (1 Horizontal Lamp Position) Included except for CFL option.

All specifications are subject to change without notice



Dimensions:

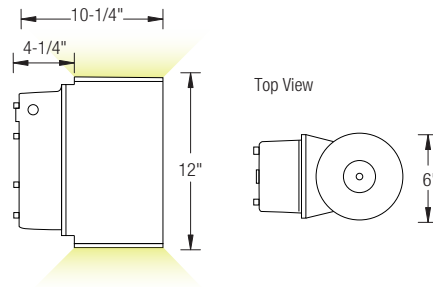

OWS

Cylinder Wall Sconce Up/Downlight

Ordering Guide > Example: OWS-CYL-UD-101-MH-175-120-PC120-BZ

OWS-CYL-UD-101					
SERIES OWS-CYL-UD-101	WATTAGE HPS, MH HPS-70 - (70W High Pressure Sodium) HPS-100 - (100W High Pressure Sodium) HPS-150 - (150W High Pressure Sodium) MH-70 - (70W Metal Halide) MH-100 - (100W Metal Halide) MH-150 - (150W Metal Halide) MH-175 - (175W Metal Halide) CFL CFL-1X26 - (1X26W Compact Fluorescent) CFL-1X32 - (1X32W Compact Fluorescent) INCANDESCENT INC-150 - (150W Incandescent)	VOLTAGE HPS, MH^{1,4} - 120 - MVOLT (120/208/240/277) - 347 ⁵ - 480 ⁵ CFL^{2,3,4} - 120 - MVOLT(120/277) - 208 - 240 - 347 INC - 120 - 277	OPTIONS PC120 - Photo control (120V only) PC277 - Photo control (277V only) SF - Single fuse DF - Double fuse XT - 20°F/-30°C Min. Temp. Bal. (CFL only)	COLOR BZ - Bronze	ACCESSORIES OWS-CYL-UD-101-RL - Replacement lens kit

NOTES:

1. Pulse-Start standard on all fixtures above 175W.
2. Lamps are not included for CFL.
3. Please consult factory for dimming options.
4. (Consult factory) for other wattages and options.
5. 347 & 480 Volt not available on 50 & 70W fixture.