

Features

Housing

Die-cast Aluminum with Powder Coated Finish
Finish Options: -05 Black, -30 Oil Rubbed Bronze
Good for Wet Location Applications

Optical

Shade: Clear Glass
Up Light, 9W, 750 lumens and Down Light, 9W, 750 lumens

Electrical

120V – 277V, Built-in Photo Cell Option
High Power Factor, Low THD

Lamp


Integrate LED Module: Color Temperature Option 3000K, 3500K, 4000K, 5000K

Certification

ETL/cETL Listed, Suitable for Wet Locations, CEC Listed

Warranty

5 Years Limited Warranty on Driver and LED

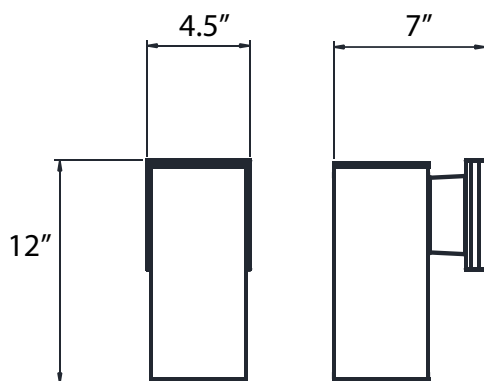

Ordering Guide > Example: OWS-CYL-UD-101-LED-1500L-MVOLT-30K-BZ

OWS-CYL-UD-101-LED					
SERIES	LUMENS	VOLTAGE	CCT	COLOR	ACCESSORIES
OWS-CYL-UD-101-LED	1500L - (1500 Lumens)	MVOLT	30K - (3000K) 35K - (3500K) 40K - (4000K) 50K - (5000K)	BZ - Bronze	OWS-CYL-UD-101-RL - Replacement lens kit