

**SURFACE MOUNT UP AND DOWN BRICK, STEP, WALL SCONCE FIXTURE**

**SUGGESTED USE**

For areas where smooth and wide light distribution is needed. Ideal for building facades, security, recreation facilities, parking lots, signs, and displays.

**CONSTRUCTION**

Electroplated stainless steel cover aluminum corrosion-proof housing with PVC sleeve. The one-piece silicone gasket effectively limits outside contaminants by sealing off the optical chamber.


**LENS** - Clear, heat- and impact-resistant tempered glass lens.

**LAMP/WATTAGE** - 50W incandescent or 10W LED.

All specifications are subject to change without notice



**Dimensions:**

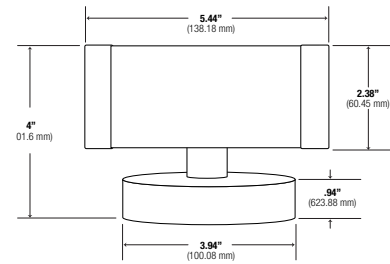

**Ordering Guide > Example: OWS-CYL-UD-103-MR16-LED-12V-BZ**

**OWS-CYL-UD-103**

**SERIES**

OWS-CYL-UD-103

MR16

**LAMP TYPE/WATTAGE**

MR16  
(50W Maximum)  
(10W LED)

12V

**VOLTAGE**

12V

BZ

**COLOR**

- BZ - Bronze
- BK - Black
- WH - White
- GR - Green
- SS - Satin Steel

**\*MUST BE USED WITH REMOTE TRANSFORMER**