




**SE106-LED**  
DIFFUSE GLASS LENS



**SE107-LED**  
ANGLED LOUVERS

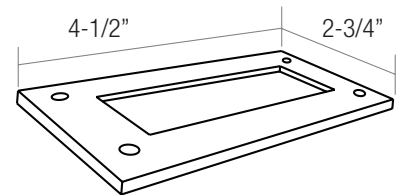

**SE108-LED**



**SE109-LED**

**HOUSING INCLUDED**

- 1 W (0.05W X 8)
- 120V input
- For use indoors in Insulated (IC) and Non- Insulated (Non-IC) areas
- For damp location only
- Conforms to UL standard 1598
- Available in Cool White(CW) Warm White (WW) or Amber (AM)

- **FIT IN HANDY BOX WHICH IS 1-7/8" DEEP, 2" W X 4" H**
- **FIT IN SWITCH BOX WHICH IS 1-7/8" DEEP, 2" W X 4" H**

**Ordering Guide** > Example: SE106-LED-CW-WH



**SERIES**  
SE106-LED-CW

SE107-LED-CW  
SE107-LED-WW  
SE107-LED-AM

SE108-LED-CW  
SE108-LED-WW  
SE108-LED-AM

SE109-LED-CW  
SE109-LED-WW  
SE109-LED-AM



**VOLTAGE**  
120 - 120V



**FINISH**  
WH - White  
BZ - Bronze  
SN - Satin Nickel

