





ST401



ST402

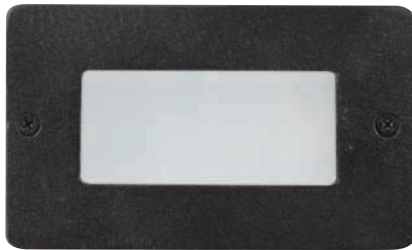

ST403



APPLICATION:

For concrete use only

BODY:

High-grade die-cast aluminum with 0.3% copper to prevent corrosion in concrete applications. Supplied standard with four 3/4" NPS holes

FACE PLATE:

High-grade die-cast aluminum

GASKET:

Single-piece molded silicon for wet location

LENS:

Frosted tempered glass

FINISH:

White, Satin Aluminum, and Bronze thermoset powder coat

EXTERNAL LOUVER:

Anodized 45° cut-off louver

REFLECTOR:

High-performance aluminum reflector assembly for superb light output.

DRIVER:

Driver included

INSTALLATION:

Two 1/2" NPS wiring holes
Feed through listed

LISTING:

UL/C-UL for wet location

Ordering Guide > Example: ST4BX-LED-WW-12-ST401-WH

| HOUSING TYPE/WATTAGE | FACE PLATE | FINISH |
|----------------------|------------|---------------------|
| LED | ST401 | WH - White |
| ST4BX-LED-WW-12V* | ST402 | BK - Black |
| ST4BX-LED-CW-12V* | ST403 | BZ - Bronze |
| ST4BX-LED-WW-120V | | SN - Satin Nickel |
| ST4BX-LED-CW-120V | | AL - Satin Aluminum |

HOUSING AND FACE PLATE MUST BE ORDERED SEPARATELY

***MUST BE USED WITH REMOTE TRANSFORMER**