

Project Name	Type
Catalog #	Date

EDGE LIT EMERGENCY LIGHT



AT A GLANCE

APPLICATION

EMERGENCY

FEATURES

- Slim profile.
- Fully automatic operation.
- Sturdy construction (completely self contained).
- Push-to-test switch.
- UV-stabilized ultra-clear acrylic edge-lit panel provides consistent, uniform illumination.
- UL Listed for damp location.

ELECTRICAL

- Dual 120-277V.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- Maintenance-free, rechargeable, sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery to recharge the battery in 24 hours.
- Charge rate/power on LED indicator light.

MOUNTING

- Surface mount via easy connect back plate, which fits most standard junction boxes and snaps into place making internal electrical connections.
- Conduit mount knockout on top of the housing and back plate.
- Suitable for wall or ceiling mount.

HOUSING

- Premium-grade, extruded aluminum housing.
- Self-adhesive chevron appliques and guide template provided for directional indication.

WARRANTY

- 1 year warranty.

ORDER LOGIC

SAMPLE CATALOG NUMBER: EMX0024

EMX

0024

MODEL




EMERGENCY LIGHT

EMX0024

10.24.16

DIMENSIONAL DATA

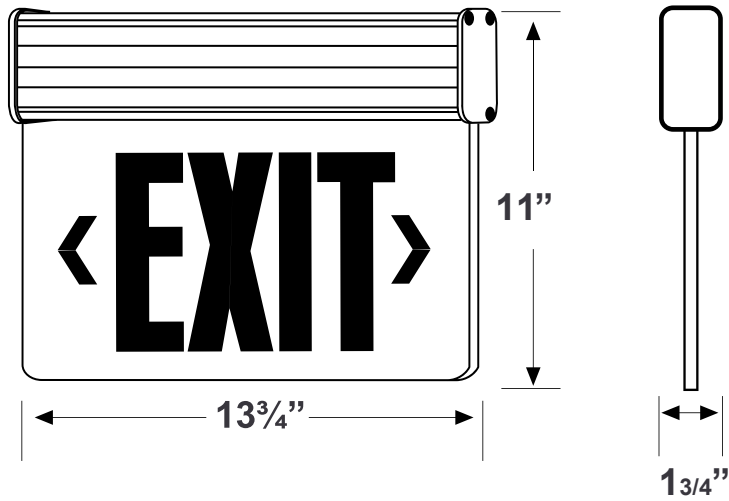

PHOTOMETRIC DATA

CONSULT FACTORY FOR PHOTOMETRICS



WORKING HARDER. LIGHTING SMARTER.®

8812 Frey Road, Houston, TX 77034 P(800) 678-6960 F(713) 943-2818 www.xlm.com customerservice@xlm.com

All information is believed to be accurate at the time of publication. XtraLight® reserves the right to change specifications without notice.