



FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency semi-specular integral reflector comes with 40° lighting distribution.
- ✓ Available with optional flat frame plate for NC installations.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ Choice of integrated reflector for standard downlight or asymmetric wallwash illumination.
- ✓ LED spot is rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

SPECIFICATION:

ED RD+

SIZE — SOURCE — VOLTAGE — DRIVER — MOUNTING — REFLECTOR — TRIM — CCT — OPTIONS

Enter the Product Code into the boxes above.

SIZE

- 4 Inch

SOURCE

- 10W LED
- 20W LED

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard
- DL - 0-10V Dimming
- DT - TRIAC
- *

* Please specify dimming method.

MOUNTING

- RT -Retrofit
- NC- New Const. Plate

REFLECTOR

- ST - Standard
- AS - Asymmetric

TRIM

- WH - White
- BK- Black
- GR - Grey

CCT

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin

*Other options are available.

OPTIONS

- No Options*
- 90 CRI


*Leave Empty.

DIMENSIONS:

| Height | Width | Cut Out |
|--------|--------|---------|
| 5.250" | 4.375" | 3.750" |

LUMEN OUTPUT:

| Watts | 30K | 35K | 40K |
|-------|---------|---------|---------|
| 10W | 975 lm | 1000 lm | 1025 lm |
| 20W | 1950 lm | 2000 lm | 2050 lm |

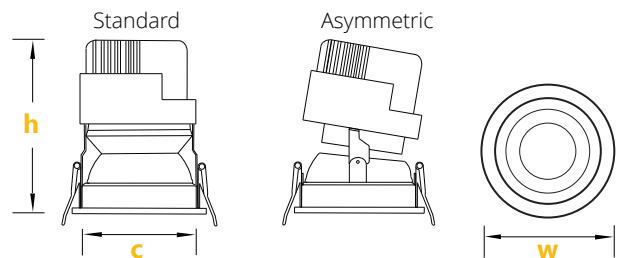

Project:

Type: