



**FEATURES:**

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency metalized integral reflector comes in following beam angles: Narrow Spot 10°, Spot 25° and Flood 40°.
- ✓ Adjustable trim assembly can be tilted up to 25° in both directions.
- ✓ Available with optional flat frame plate for NC installations.
- ✓ Suitable for recessed non insulated ceilings and dry locations.
- ✓ LED spot is rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**
**ED TS+**


Enter the Product Code into the boxes above.

**SIZE**

- 1x-Single
- 2x-Double
- 3x-Triple

**SOURCE**

- 10W LED
- 15W LED
- 20W LED

**VOLTAGE**

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

**DRIVER**

- ST - Standard
- DT - ELV
- DL - 0-10V Dimming (1%)
- \*

\* Please specify dimming method.

**MOUNTING**

- RT -Retrofit
- NC- New Const. Plate

**REFLECTOR**

- NP - Narrow Spot
- SP - Spot
- FL - Flood

**TRIM**

- WH - White
- BK- Black
- GR - Grey

**CCT**

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin

\*Other options are available.

**OPTIONS**

- No Options\*
- 90 CRI


\*Leave Empty.

**DIMENSIONS:**

Size	Height	Width	Length	Cut Out
Single	5.938"	7.09"	7.09"	6.25x6.25"
Double	5.938"	7.09"	14.17"	6.25"x12.25"
Triple	5.938"	7.09"	21.26"	6.25"x20.25"

**LUMEN OUTPUT:**

Watts	30K	35K	40K
10W	1050 lm	1070 lm	1090 lm
15W	1570 lm	1605 lm	1640 lm
20W	2090 lm	2145 lm	2200lm

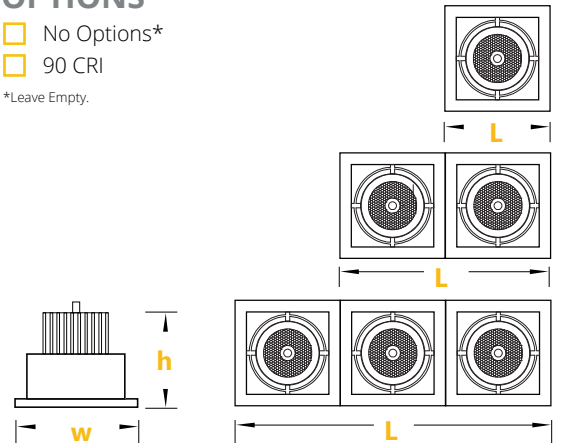

Project:

Type: