

Beam 3


PENDANT MOUNT - DIRECT / INDIRECT REGULAR LIT CORNER PATTERNS

Project _____

Type _____


Notes _____

*** Please see page 2 for example on how to specify various right angle patterns.**

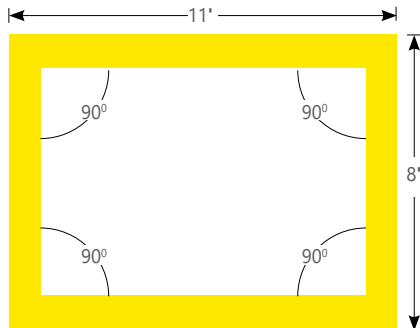


TB3DILEDPAT	R (11'X8')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Rectangle Corner Pattern

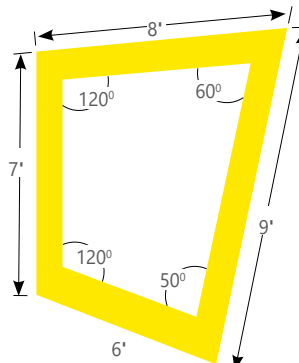

TB3DILEDPAT	FF(30)	OPR(120+60+50+120)
PRODUCT ID	PATTERNS AND LENGTH	CORNER DEGREES

TOP VIEW - Corner Pattern

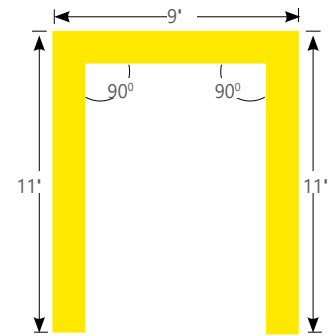

TB3DILEDPAT	U (9'X11'X11')
PRODUCT ID	PATTERNS AND LENGTH

TOP VIEW - Open Shape Corner Pattern

IMPORTANT! – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

Ordering Guide

PRODUCT ID	PATTERNS AND LENGTH (SELECT ONE)	CORNER DEGREES (OPT.)	LUMENS/FT INDIRECT	LUMENS/FT DIRECT	CRI
TB3DILEDPAT Beam 3 Direct/Indirect	S(L)* square shape (length) R(LxL)* rectangular shape (length) U(LxLxL)* U shape (length) L(LxL)* L shape (length) T(LxLxL)* T shape (length) X(LxLxLxL)* X shape (length)	FF(L) total pattern length OPR(#) regular lit corner degrees	400 400 lm/ft - Min. 1100 1100 lm/ft - Max.	400 400 lm/ft - Min 1000 1000 lm/ft - Max	80 80 CRI 90 90 CRI
	*Comes in 90 degree only.	FREE FORM for various angles. Minimum 2'.	Specify for FF option only. Please confirm corner degrees. Min 45°	Outputs between listed min and max are available. Consult factory for outputs outside of the listed range.	Outputs between listed min and max are available. Consult factory for outputs outside of the listed range.


COLOUR TEMP.	SHIELDING INDIRECT	SHIELDING DIRECT	SPECIFY LENGTH	FINISH	VOLTAGE	DRIVER
27 2700 K 35 3500 K 30 3000 K 40 4000 K	SO spotless lens SL surroundlite SLA surroundlite asymmetric 0.25G 0.25" Glo lens BW batwing, flush only	SO spotless lens ASO asymmetric, flush only 0.25G 0.25" Glo lens 1.25M StepLens, lum. end cap UB Ultra blend lens (Flush only) BW batwing, flush only NW narrow, flush only GZ graze, flush only WW wallwash, flush only	NL nominal EX exact	AP aluminum paint W white BLK black C custom	120 120V 277 277V 347 347V UNV universal DC low voltage*	DP dimming (0-10V) 1% LT(#) Lutron * BI bi-level dimming O(#) other ** POE(#) POE drivers*
		Choose only one of the options above; SurroundLite not available with direct			* Only available with POE drivers.	* Specify system; see page 3. **Please consult factory; see page 3

CIRCUITS	MOUNTING/SUSPENSION	BATTERY	OTHER	IC CONTROLS (OPTIONAL)	CUSTOM (OPT.)
1 1 circuit 2 2 circuits +E(#) emergency circuit * +NL(#) night light circuit * +GTD(#) generator transfer device *	CA(L) drywall+cable length (36"std) CT9(L) TB/TG 9/16+cable length (36" std.) CT15(L) TB/TG15/16+cable length (36" std.) CTS(L) ST+cable length (36" std.) SA(L) drywall+stem length>48 (18"std)	B(#) battery pack 4' sections	F fuse * D dust cover	DS(#) daylight sensor OS(#) occupancy sensor DOS(#) daylight & occupancy sensor EN(#) Enlighted integral * ENR(#) Enlighted remote * WC(#) wireless control dimming	C custom
* Specify quantity	Specify quantity	Requires 120V or 277V Please consult factory	* Requires 120V or 277V	* Please consult factory See integrated controls guide for more details.	Please specify


How to Specify 90 degree Corners and Patterns

Example

Defining R - Rectangular shape

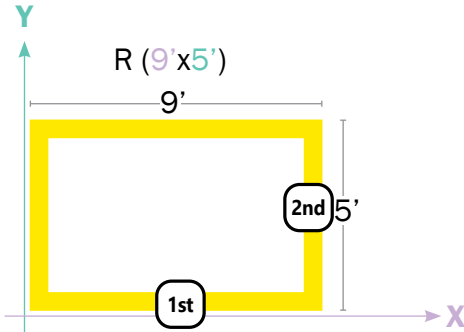


Defining L shape

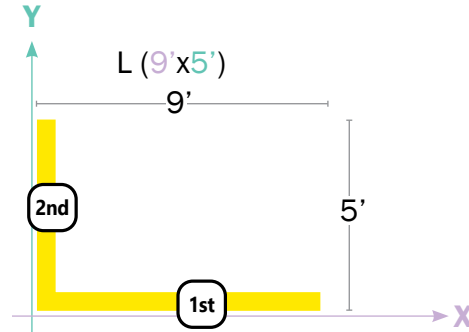


Note: The first number will always define the width, the second - the length.

Defining U shape

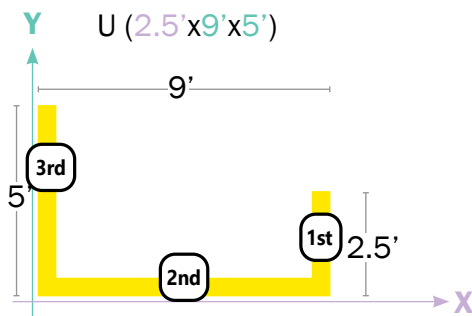


Note: The first number will always define the right arm length, the second - the width, and the third - the left arm length.

Defining T shape

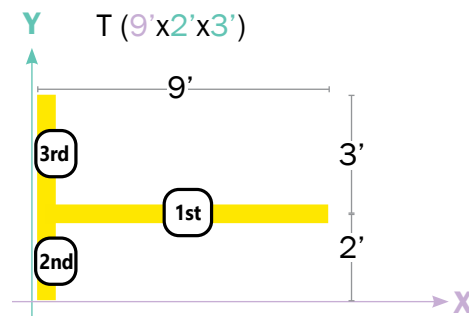


Note: The first number will always define the width, the second - the bottom arm length, and the third - the top arm length.

Defining S - Square shape

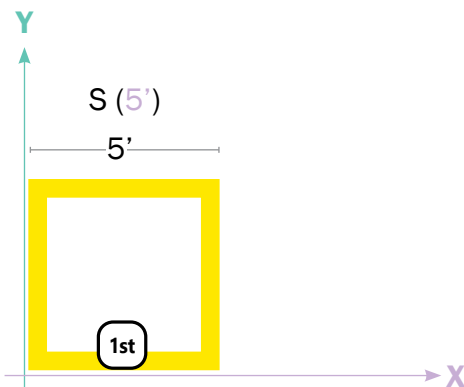

Note: The number will define the width. (All sides are the same length).

Defining X shape

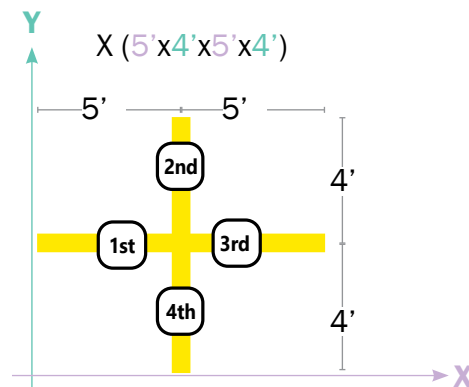

Note: The first number will define length of the left arm, the second - the arm length to the right from the first, and so on until the 4th arm.

● LIT CORNER FEATURES


The Lit Corner system allows continuous illumination all the way through the corner section

To optimize corner illumination, lit corners are created as integral components of the linear sections. Linear sections have mitered ends that connect to corresponding mitered ends of neighboring linear sections.

Illuminated Corners are more complex. Because the corner is fully illuminated, the corner is not independent of the straight sections, but integrated into the straight segment's housing. The corner is mitered, allowing a seamless line of light.

Regular Illuminated Corner - A fully illuminated corner that lies on the same plane, for example, the ceiling. There are two corner options available for Regular Lit Corners: **Open Shape Corner** and **Closed Shape Corner**

TIP: Provide sketches illustrating corner types and locations required.

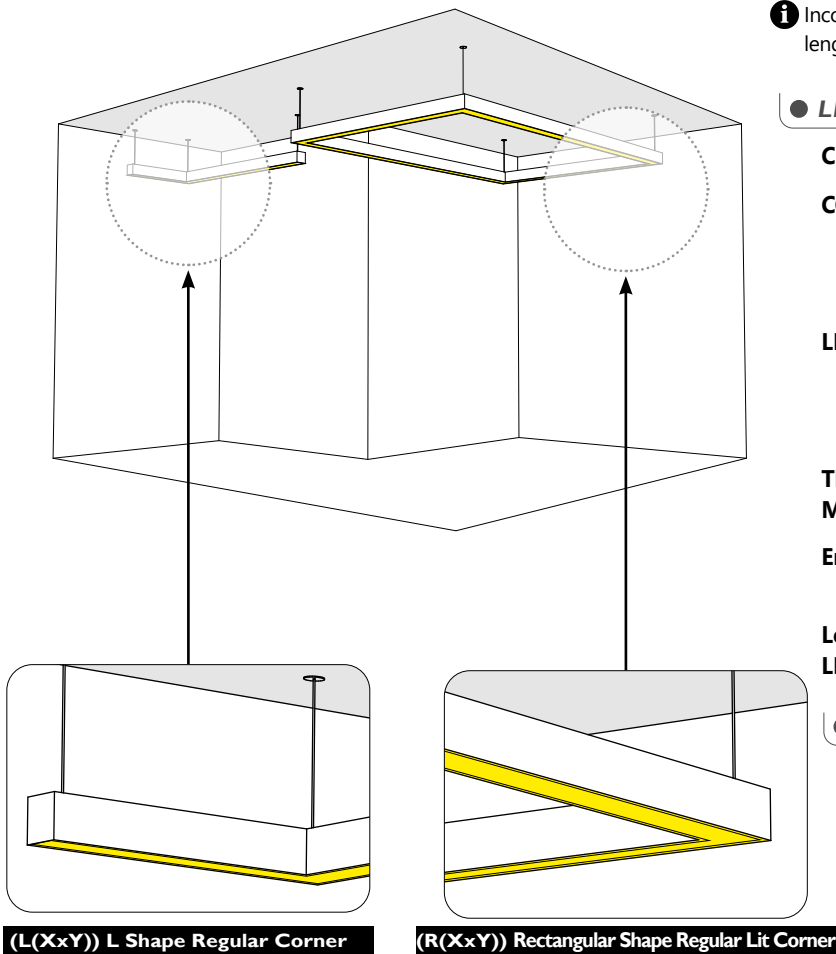

● ELECTRICAL

Lutron driver*	LDE1 - Hi-lume 1% EcoSystem with Soft-on, Fade-to-Black LTEA - Hi-lume 1% 2-wire (120V forward phase only) *Consult factory
Other drivers	DALI - Digital Addressable Lighting Interface DMX - Digital Multiplex LV - line voltage - Advance Mark 10 Xitanium SR - For wireless sensor
Power over Ethernet POE drivers* (consult factory for more information) UL2108 certified for integral or remote driver	MOLEX IGOR O - Other (Consult factory)
Emergency	Integral emergency battery pack or emergency circuit optional.
Input Voltage	120V, 277V, 347V, UNV.

i Incorporating these components may have limitations or affect the length of the luminaire. Please contact factory for more details.

● LED SYSTEM

CRI	Minimum 80 or 90 color rendering index.
CCT	Choice of 2700K, 3000K, 3500K and 4000K color temperature with a great color consistency (within 3-step MacAdam ellipse). Both within fixture and fixture to fixture.
LED life	Minimum 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.
Thermal Management	Aluminum housing acting as the heat sink to maximize life.
Environment	Dry and damp rated in operating ambient temperatures of 0-40°C (32-104°F).
Louver LED	Individual LED cluster in each louver cell.

● WARRANTY

Axis Lighting will warrant defective LEDs, boards, and drivers for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specifications. If defective, Axis will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Axis.



A large grid of squares, intended for drawing corner patterns. The grid consists of 30 columns and 30 rows of squares, providing a space for technical drawings.