Purist

T2RA-T | Standard LED

2" Round Adjustable

FEATURES

- Ø 2" [51mm] Aperture
- Damp location listed
- Wet location optional
- Rated for insulated airtight and non insulated ceilings.
- 25° Tilt
- Aluminum body
- Powder coated finishes
- Trim clips designed for up to 0.625" ceiling thickness
- Powered by a remodel driver (sold separately)

LISTINGS

Warm Dimming

Wet Location

FINISHES

- White
- Black
- Matte Silver
- Bronze
- Matte Nickel

COLOR TEMPERATURES

- 3000K–1800K (Warm Dim)
- 2700K
- 3000K
- 3500K
- 4000K

BEAM SPREADS (LXX)

30° 50° 65°

WARM DIM BEAM SPREADS (BXX)

25° 36° 55°

CERTIFICATIONS

Intertek

5 YEAR LIMITED WARRANTY

MADE IN CANADA FABRIQUÉ AU CANADA

PERFORMANCE SUMMARY

Color Accuracy (SDCM)	<3	
L70 Estimate (h)	50,000	
Color Rendering (CRI)	80	90
Lumen Series	2	
Source Lumens	800	700
LED Wattage	6	6
Lumen Series	3	
Source Lumens	1100	1000
LED Wattage	8.5	8.5
Lumen Series	4	
Source Lumens	1500	1300
LED Wattage	13	13

PERFORMANCE SUMMARY—WARM DIMMING

Color Rendering (CRI)	95
Lumen Series	1
Source Lumens	1000
LED Wattage	12

WARM DIMMING METRICS

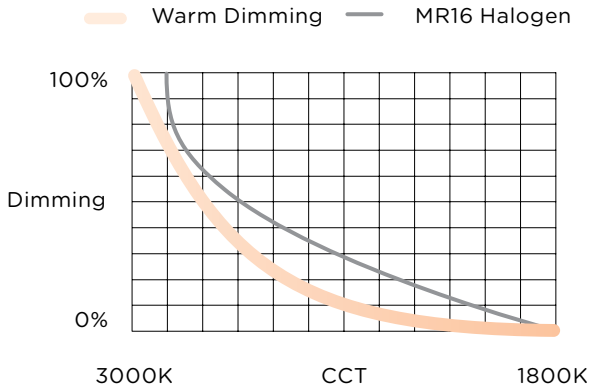

Product specifications and dimensions are subject to change without notice

All rights reserved. © 2020 Lightheaded Lighting Ltd. Rev 2020.10.07

info@lightheadedlighting.com **P.** 604.464.5644 **T.** 1.800.464.9544

LIGHTHEADED™

Purist

T2RA-T | Standard LED

2" Round Adjustable

TAG TYPE

ORDER FORM—TRIM

1	2	3	4	5	6	7

1. TRIM
T2RA-T

2. FLANGE FINISH
01 White
04 Black
05 Matte Silver
06 Bronze
11 Matte Nickel
CC Custom Color [1]

3. REFLECTOR FINISH
01 White
04 Black
05 Matte Silver
06 Bronze
11 Matte Nickel
CC Custom Color [1]

4. GLASS
[Blank] No Lens
CL Clear (Wet location) [2]

5. MODULE & BEAM
L30 30° Beam
L50 50° Beam
L65 65° Beam
B25 25° Beam (Warm Dim) [3]
B36 36° Beam (Warm Dim) [3]
B55 55° Beam (Warm Dim) [3]

6. COLOR TEMPERATURE
27 2700K
30 3000K
35 3500K
40 4000K
3018 3000–1800K (Warm Dim) [3]

7. CRI, LUMENS
8008 80 CRI, 800lm, 2 Series
9007 90 CRI, 700lm, 2 Series
8011 80 CRI, 1100lm, 3 Series
9010 90 CRI, 1000lm, 3 Series
8015 80 CRI, 1500lm, 4 Series
9013 90 CRI, 1300lm, 4 Series
9510 95 CRI, 1000lm, 1 Series (Warm Dim) [3]

NOTES
1 CC custom color requires consultation with Lightheaded sales personnel.
2 Glass is mounted to trim and is wet location listed when selected.
3 3018 warm dim color temperature is only available in 9510 CRI, Lumens Series, Bxx Series module and Beam Spread.

ORDER FORM—DRIVER

1	2	3	4

1. REMODEL DRIVER
DRC-T2

2. SERIES
1 1000 Lumens Max (Warm Dim) [1]
2 800 Lumens Max
3 1100 Lumens Max
4 1500 Lumens Max

3. DIMMING
LH Lutron EcoSystem (1%) [2]
P 0–10V Dimming (10%)
S Phase Dimming (10%) [3]

4. VOLTAGE
120 120V
277 277V

NOTES
1 1 series is only compatible with 9510 CRI, Lumens (Warm Dim) option.
2 LH dimming is only compatible with IC4A insulated airtight housings when using 2 or 3 series remodel drivers. It is not compatible with IC3A housings.
3 S dimming is only available in 120 voltage.

ORDER FORM—BASEPLATE

1	2	3	4

1. BASEPLATE
R2P

2. CEILING TYPE
F Non-Insulated
1C3A Insulated airtight (housing) [1]
1C4A Insulated airtight (housing) [2]

3. SHAPE
R Round

4. FLANGE TYPE
T Trimmed

NOTES
1 1C3A is only compatible with 2 and 3 series remodel drivers using P or S dimming.
2 1C4A is only compatible with 1, 2, 3 and 4 series remodel drivers using P or S dimming or 2 and 3 series remodel drivers using LH dimming.

Product specifications and dimensions are subject to change without notice
All rights reserved. © 2020 Lightheaded Lighting Ltd. Rev 2020.10.07
info@lightheadedlighting.com **P.** 604.464.5644 **T.** 1.800.464.9544

LIGHTHEADED™

SPECIFICATIONS

CEILING CUTOUTS

Ø 2.625″ [67mm]

TRIM DIMENSIONS

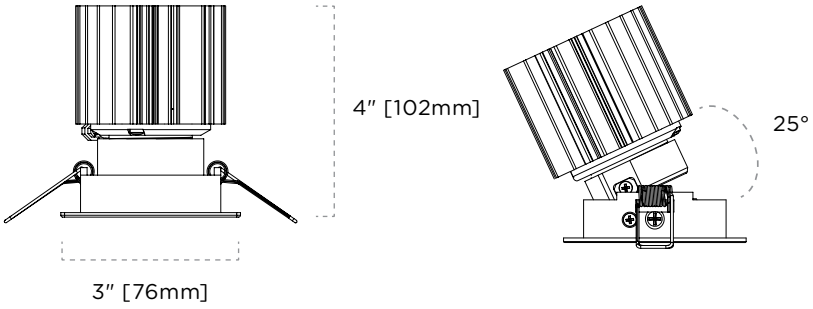

REMODEL DRIVER DIMENSIONS



Minimum Plenum Height
5.5″ [140mm]



BASEPLATE DIMENSIONS

NON INSULATED BASEPLATE (F)

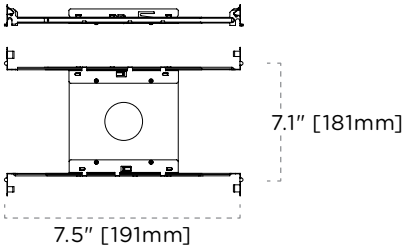

INSULATED AIRTIGHT HOUSING (IC3A)

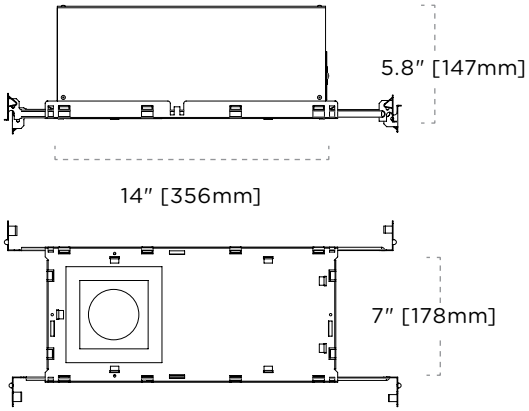

INSULATED AIRTIGHT HOUSING (IC4A)

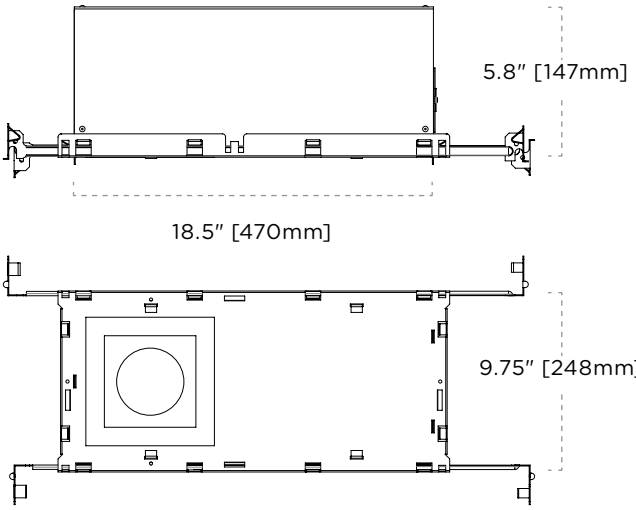

Product specifications and dimensions are subject to change without notice
All rights reserved. © 2020 Lightheaded Lighting Ltd. Rev 2020.10.07
info@lightheadedlighting.com **P.** 604.464.5644 **T.** 1.800.464.9544

LIGHTHEADED™