



# NIMBUS

## HPDL PENDANT

### STANDARD FEATURES

- Heavy gauge spun aluminum housing
- UV stabilized acrylic reflector
- All hardware stainless steel
- 5 year limited warranty
- Dimming driver(s) 0-10V
- Operating temperatures 40 degrees C/104 degrees F
- Buy American Act
- ETL listed and tested to UL Standard No. 1598 and CSA Listed for damp location indoor location



SERIES	MODEL	SIZE	STYLE	VOLT	LIGHT SOURCE	LUMENS	CCT	COLOR	MOUNTING	COMMON OPTIONS	SPECIFIC OPTIONS
HPDL	500	812	DT: Dome Top RT: Round Top	120-277UNV 347-480UNV	2X PLT 32	3840		TAL: Textured Aluminum TBK: Textured Black TBZ: Textured Bronze TWH: Textured White	CBXX: Black Cord & Canopy, Specify Length CWXX: White Cord & Canopy, Specify Length ACXX: Aircraft Cable & Canopy, Specify Length SMXX: Stem & Canopy, Specify Length HHCP-BK: Hook Hanger, Black Cord & Plug HHCP-WH: Hook Hanger, Black Cord & Plug	CFL: Clear Flat Lens PCR: Polycarbonate Refractor RMB: Remote Mount Ballast EM: Emergency Back-up Power Supply DC: Dual Cable Suspension & Curly Cord (FT ONLY) OS: Occupancy Sensor**	EMI: Integral, Suspended Back-up Power Supply WG: Wire Guard SC30: 30 Degree Hang Straight SF: Single Fuse BT = Bluetooth sensor RD = Remote dimming PE = Photocell installed at factory MS = Motion sensor CC = Coil Cord
					2X PLT 42	5120					
					35W*	4500	3500				
						4600	4000				
					4900	5000					
					4X PLT 32	7680					
		4X PLT 42			10240						
		35W			4500	3500					
					4600	4000					
					4900	5000					
		50W			5200	3500					
					5440	4000					
					5540	5000					
		70W*			8660	3500					
					9020	4000					
					9120	5000					
		8X PLT 32			15360						
		8X PLT 42*			20480						
		105W*			12990	3500					
					13530	4000					
					13680	5000					
		140W*			17320	3500					
					18040	4000					
					18240	5000					
30310	3500										
245W*	31570	4000									
	31920	5000									

\* Active cooling US patent number 8,708,530 B2 /  
 \*\* Available only on HPAL and HPGL models /  
 \*\*\* Available only with PDR, DBR, KGD, KPD, and KDB

### ORDERING INFORMATION

SERIES	MODEL	SIZE	STYLE	VOLT	LIGHT SOURCE	LUMENS	CCT	COLOR	MOUNTING	COMMON OPTIONS	SPECIFIC OPTIONS

Consult factory for voltage and other lamp options. Product specifications subject to change without notice.

1. Programmable drivers at the PACE factory
2. Color tunable
3. Capable of remote dimming
4. Can be equipped with motion sensors for on/off functioning
5. Can be equipped with light sensors for dusk-to-dawn automatic on/off operation
6. Bluetooth commissioning sensor capability for Android and iOS

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used. In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.



**PACE**  
ILLUMINATION


**NIMBUS**  
HPDL PENDANT

**SIZES**  
Small = 14.911 diameter  
Medium = 18.7" diameter  
Large = 24.811 diameter


**MOUNTING**  
Air craft cable and cord standard

**COLOR**  
Textured or smooth polyester powder coat finishes RAL colors available

DT = Dome top

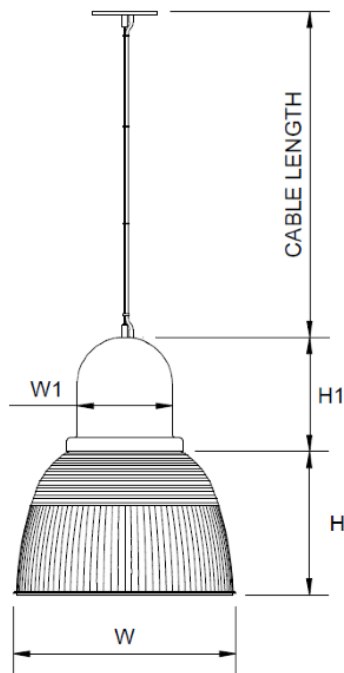

RT = Round top

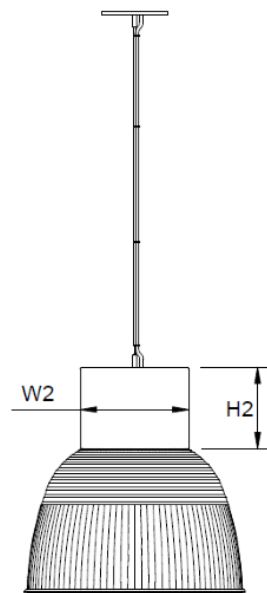

	W	W1	W3	H	H1	H3
Small	Ø12.4"	Ø5.5"	Ø6.0"	7.0"	7.3"	2.0"
Medium	Ø16.3"	Ø7.0"	Ø8.0"	10.5"	8.4"	2.0"
Large	Ø22.4"	Ø10.5"	Ø12.0"	12.1"	11.5"	2.5"

Although PACE has prepared the information contained in this document with all due care, PACE does not warrant or represent that the information is free from errors or omission. Whilst the information is considered to be true and correct at the date of publication, changes in circumstances after the time of publication may impact on the accuracy of the information. The information may change without notice and PACE is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

In the interest of product improvement, Pace reserves the right to make technical and product specification changes without notice. Consult factory for voltage and other lamp options.