


EMBD is a recessed mounted aluminum extrusion. It is offered with Q-Tran's standard lens as well as an optical lens option, that when paired with an adjustable tray creates a plethora of light beam angles. EMBD can be mounted with a magnetic bar along with recessable spring clip technology.

### Finish

SATIN

### Dimensions

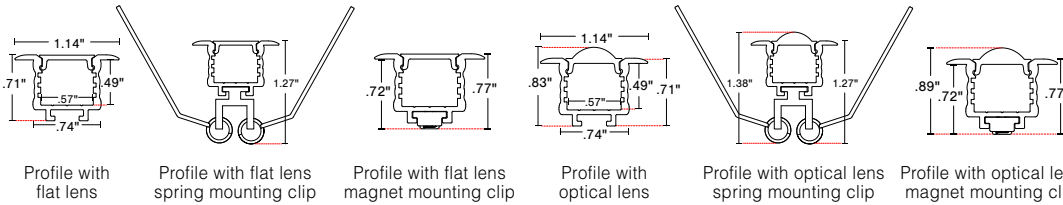

Profile with flat lens

Profile with flat lens spring mounting clip


Profile with flat lens magnet mounting clip

Profile with optical lens

Profile with optical lens spring mounting clip

Profile with optical lens magnet mounting clip


### Mounting



2 clips provided for 4' or less; 4 clips provided for greater than 4'

One MG provided per foot

### Part Number Builder

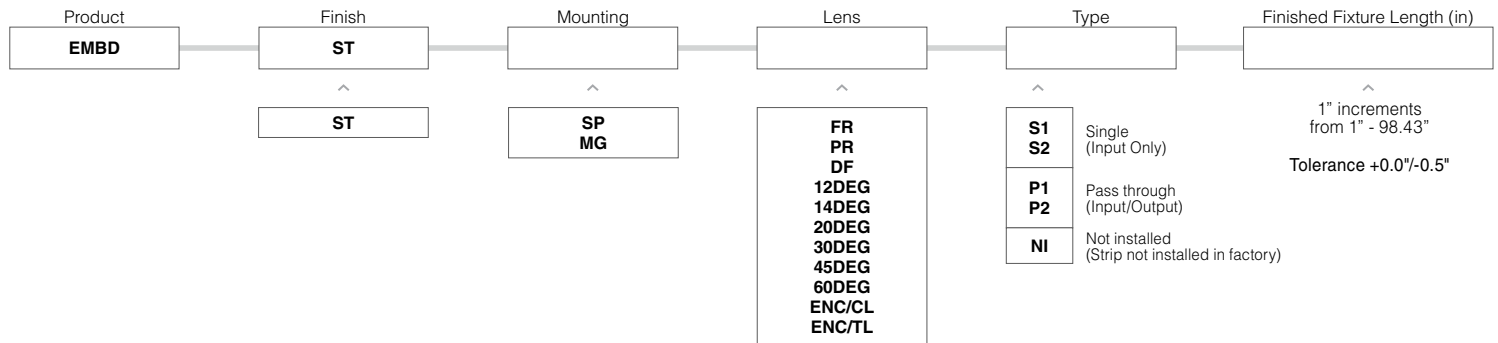

- Field modifications must comply with Q-Tran's installation methods otherwise warranty is null & void
- UL Listed when assembled with STRIP LEDs at Q-Tran
- Spring clip technology
- Optical lens option
- Suitable for installation in the storage area of a clothes closet when assembled as a fixture at Q-Tran facility (Not applicable for encapsulation or LED strips exceeding 4W/ft)
- UL 2108: Type IC recessed inherently protected
- Suitable for installation in drywall




## Compatible Strips


	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STOCKING DISTRIBUTOR (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	DYNAMIC WHITE (DW)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	STATIC COLOR (SC)	WARM DIM (WD)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)*
	1.5W/ft 3.0W/ft 4.0W/ft 5.0W/ft 6.0W/ft	5.0W/ft	2.0W/ft 4.0W/ft 6.0W/ft	1.5W/ft 3.0W/ft 6.0W/ft 9.0W/ft	3.0W/ft 6.0W/ft	6.0W/ft	3.0W/ft 5.0W/ft 8.0W/ft	5.0W/ft	6.0W/ft	6.0W/ft	6.0W/ft	4.0W/ft 8.0W/ft
DRY	✓	✓	✓	✓ <small>Not compatible with 9.0</small>	✓	✓	✓ <small>Not compatible with 8.0</small>	✓	✓	✓	✓	✓ <small>Not compatible with 8.0</small>
DMP	✓ <small>Not compatible with 6.0</small>			✓ <small>Not compatible with 9.0</small>		✓	✓ <small>Not compatible with 8.0</small>	✓		✓	✓	✓ <small>Not compatible with 8.0</small>
ENC	✓ <small>Not compatible with 6.0</small>			✓ <small>Not compatible with 9.0</small>		✓	✓ <small>Not compatible with 8.0</small>	✓		✓	✓	✓ <small>Not compatible with 8.0</small>
WET	✓ <small>Not compatible with 6.0</small>		✓ <small>Not compatible with 6.0</small>		✓ <small>Not compatible with 6.0</small>	✓	✓ <small>Not compatible with 8.0</small>	✓	✓	✓		✓ <small>Not compatible with 8.0</small>

\*Not recommended for use with optical lenses

## Length (in) Add to nominal LED length for fixture length

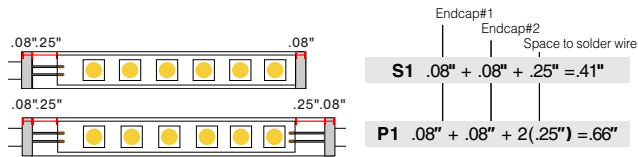


## End Caps

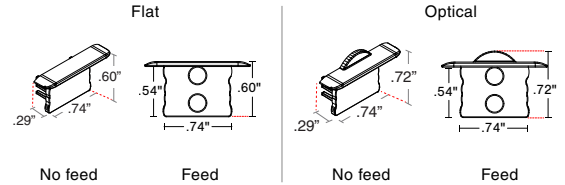


## Lens

with LED visibility

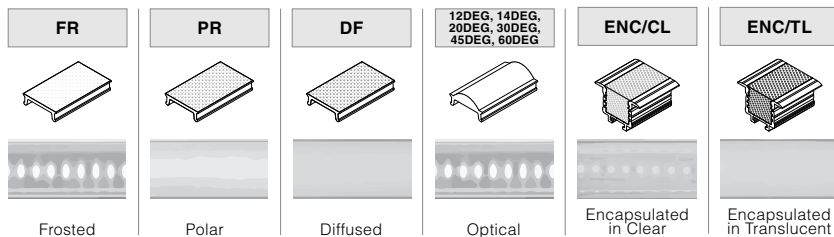

## Cut Off

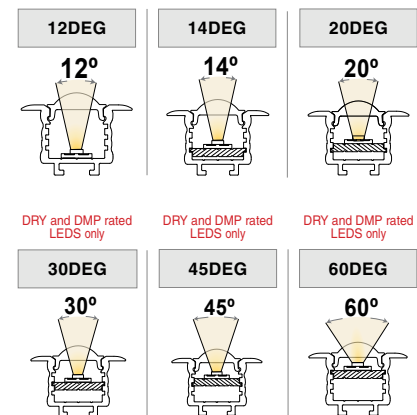

## Type

SINGLE (Input only)

PASS THROUGH (Input/Output)

