ROND

ALUMINUM EXTRUSION

The ROND LED extrusion is a unique round profile extrusion that can be adjusted to a variety of angles in the field with the included mounting clips. It can be rotated by 45 degrees. ROND is offered in satin and black finishes. Their unique stainless steel clips are also available in satin or black finishes. Lens options are clear, frosted, and diffused. Available in lengths up to 98.43”.

Finish

SATIN

BLACK

Dimensions



Profile with flat lens



Profile with stainless steel mounting clip

Mounting

2 clips provided for 4' or less; 4 clips provided for greater than 4'

SST



Stainless steel clip

Part Number Builder

Product	Finish	Mounting	Lens	Type	Finished Fixture Length (in)
ROND	ST BK	SST	CL FR DF	S1 Single (Input Only) P1 Pass through (Input/Output) NI Not installed (Strip not installed in factory)	1” increments from 1” - 98.43” Tolerance +0.0"/-0.5"

- Field modifications must comply with Q-Tran’s installation methods otherwise warranty is null & void
- UL Listed when assembled with STRIP LEDs at Q-Tran
- Surface mount
- Suitable for installation in the storage area of a clothes closet when assembled as a fixture at Q-Tran facility (Not applicable for encapsulation or LED strips exceeding 4W/ft)
- 45˚ rotation

c UL us LISTED

NEC 410.2 and 410.16

RoHS COMPLIANT

© 2022 Q-Tran Inc. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@q-tran.com | www.q-tran.com

Specification subject to change. Rev-06-06-22

ROND

ALUMINUM EXTRUSION

Compatible Strips

	STATIC WHITE (SW)	STATIC WHITE INDIVIDUALLY ADDRESSABLE (SW-IA)	STATIC WHITE STOCKING DISTRIBUTOR (SD-SW)	STATIC WHITE HIGH EFFICACY (SW-HE)	STATIC WHITE HIGH EFFICACY PLUS (SW-HE+)	DYNAMIC WHITE (DW)	DYNAMIC WHITE HIGH EFFICACY (DW-HE)	STATIC COLOR (SC)	WARM DIM (WD)	RGB	RGBW	RGBW HIGH EFFICACY (RGBW-HE)
	1.5W/ft 3.0W/ft 4.0W/ft 5.0W/ft 6.0W/ft	5.0W/ft	2.0W/ft 4.0W/ft 6.0W/ft	1.5W/ft 3.0W/ft 6.0W/ft 9.0W/ft	3.0W/ft 6.0W/ft	6.0W/ft	3.0W/ft 5.0W/ft 8.0W/ft	5.0W/ft	6.0W/ft	6.0W/ft	6.0W/ft	4.0W/ft 8.0W/ft
DRY	✓	✓	✓		✓	✓	✓ Not compatible with 8.0	✓	✓	✓		✓ Not compatible with 8.0
DMP	✓ Not compatible with 6.0					✓	✓ Not compatible with 8.0	✓		✓		✓ Not compatible with 8.0
ENC												
WET												

Length (in) Add to nominal LED length for fixture length

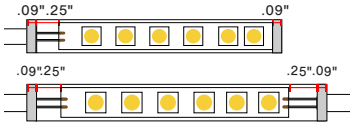



Rotation 45° rotation



End Caps



Lens with LED visibility

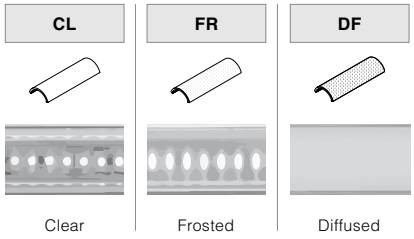

Cut Off



Type

SINGLE (Input only)

S1



End feed

PASS THROUGH (Input/Output)

P1



End feed

© 2022 Q-Tran Inc. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@q-tran.com | www.q-tran.com

Specification subject to change. Rev-06-06-22