

SD-SW24/6.0

STRIP: Static White



Part of our Standard collection, SD-SW24/6.0 is an energy-efficient 24-volt, 6.0-watt/foot strip and is available in CCTs of 2400K, 2700K, 3000K, 3500K, and 4000K. Offered in dry.


The SD-SW24/6.0 strip is Quick Ship eligible in CCT's of 2700K, 3000K, and 3500K and is available in full reels or custom cut lengths.

Technical Information [Calculated L70 = 70000 hours]


Tested with SD-SW24/6.0-DRY

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
● 2400K	487	84 Lm/W	97	88	95	103
● 2700K	493	86 Lm/W	98	95	96	102
● 3000K	522	91 Lm/W	97	92	94	102
● 3500K	548	95 Lm/W	97	87	94	99
○ 4000K	593	103 Lm/W	97	93	93	101

Dimensions

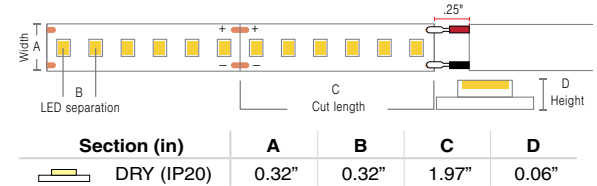

Part Number Builder

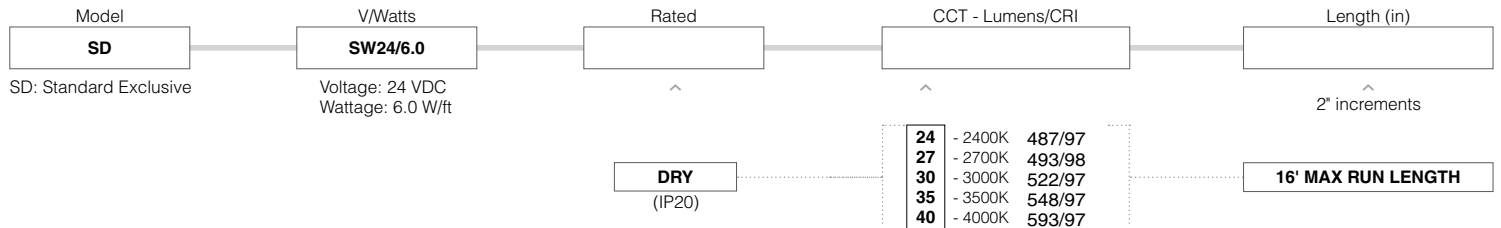

- 5 year warranty
- Field modifications must comply with Q-Tran's installation methods otherwise warranty is null & void
- All data has +/- 5% tolerance
- UL Listed
- Title 24 - JA8-2016 Strips: DRY rated, 2700K and above
- Available in DRY 25' & 100' reels for field installation. Contact factory



SD-SW24/6.0

STRIP: Static White



Compatible Extrusions

	SLIM	WIDE	ROND	TORQ	TRE3	LALO	TALO
DRY	✓	✓	✓	✓	✓	✓	✓
DMP							
ENC							
WET							

	ARKA	TELA	VEEVE	FLUR	EMBD	LATO	MDIN	OPTI
DRY	✓	✓	✓	✓	✓	✓	✓	✓
DMP								
ENC								
WET								

Compatible Accessories

SNP-LEAD .45" .17" .61" DRY only 22 - 20 AWG	SNP-INLINE .45" .17" .85" DRY only 22 - 20 AWG	CLP-LEAD .96" .30" .50" DRY only 22 - 18 AWG	CLP-INLINE .78" .30" .50" DRY only 22 - 18 AWG	Q-mini-J 	iQ-LED-24-KIT 	iQ-JUMP-6-KIT
--	--	--	--	---------------------	--------------------------	--------------------------