



PIVOT MODULE

LUMENWERX


HLO/BLANK

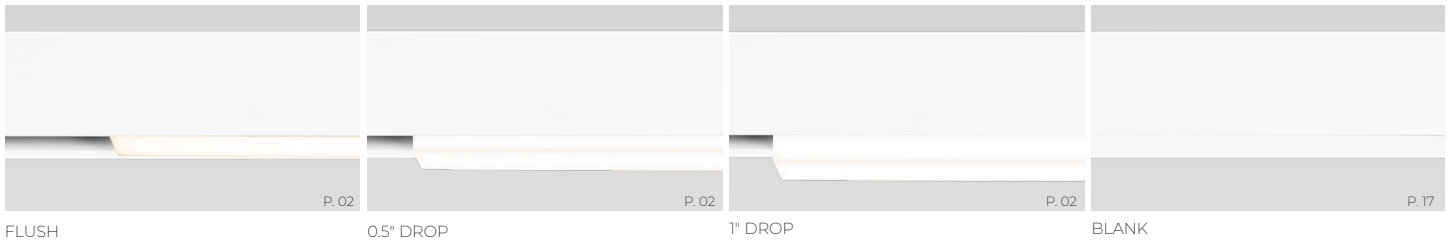

CLUSTER/WALL WASH

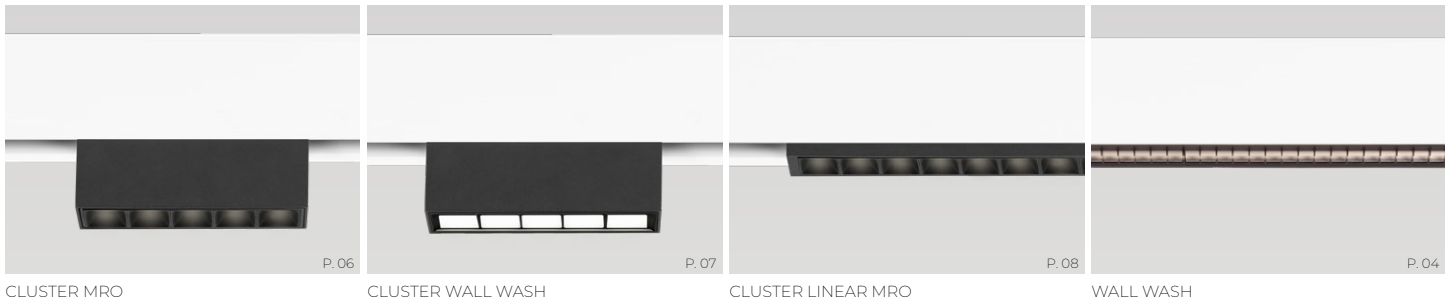

DOT/BOX

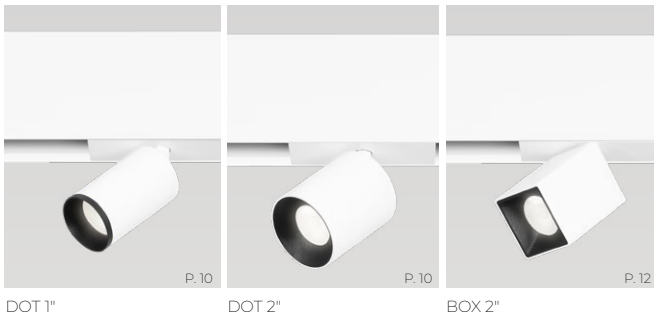

CYLINDER



GLOBE



PIVOT MODULE

STATIC WHITE, FULL SPECTRUM


LUMENWERX



Project: _____

Type: _____

PIVOT HLO

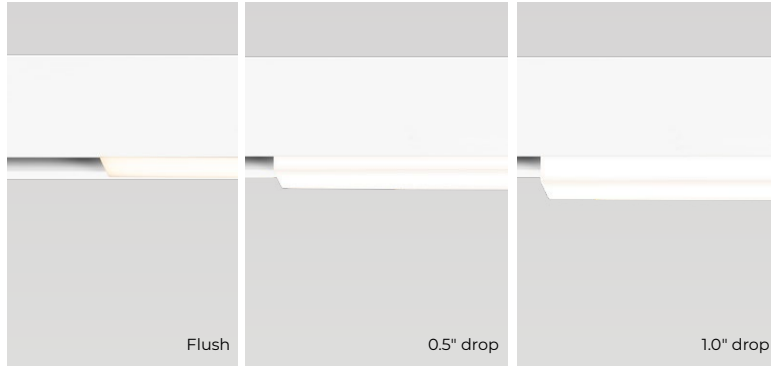

DESCRIPTION

Pivot HLO modules offer smooth, elegant lighting with an impressive power output of up to 1000 lm/ft, perfect for areas that require an added punch of illumination. The HLO (High-Efficiency Lambertian Optic) Flush and Drop modules come in 1-foot to 8-foot increments.

Pivot HLO

LUMINAIRE ID	LENS POSITION	LENGTH	LIGHT SOURCE	CRI	LUMEN PACKAGE	COLOR TEMP.
PIVHLO - Pivot HLO PIVHLOD - Pivot HLO Drop	FH ¹ - Flush 0.5D ² - 0.5" drop 1.0D ² - 1.0" drop ¹ Available for Pivot HLO. ² Available for Pivot HLO Drop.	1FT - 1' 2FT - 2' 3FT - 3' 4FT - 4' 5FT - 5' 6FT - 6' 7FT - 7' 8FT - 8'	SW - Static white FS - Full spectrum	80CRI ³ - 80 CRI 90CRI ³ - 90 CRI 95CRI - 95 CRI ³ Not available with full spectrum.	500LMF - 500 lm/ft 750LMF - 750 lm/ft 1000LMF ⁴ - 1000 lm/ft ⁴ Not available with 95 CRI.	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K

MODULE FINISH	CHANNEL POSITION ⁵
TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options.	USC - Unified single channel DUC1 - Dual channel 1 DUC2 - Dual channel 2 ⁵ The channel position of each module must correspond to the channel option selected for the track. With USC, all modules will be controlled together. With DUC, specify either DUC1 or DUC2 for each module.

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM


LUMENWERX




Project: _____

Type: _____


Dimensions




PIVHLO - Pivot HLO - Flush



PIVHLO - Pivot HLO - Side view




PIVHLOD - Pivot HLO Drop - 0.5D




PIVHLOD - Pivot HLO Drop - 1D

NOMINAL LENGTH	A		WEIGHT	
	TOTAL LENGTH			
1FT	12 7/16"		0.4 lb	0.18 kg
2FT	23 11/16"		0.73 lb	0.33 kg
3FT	35 11/16"		1.08 lb	0.49 kg
4FT	46 15/16"		1.41 lb	0.64 kg
5FT	58 7/8"		1.75 lb	0.8 kg
6FT	70 7/8"		2.09 lb	0.95 kg
7FT	82 7/8"		2.43 lb	1.11 kg
8FT	94 7/8"		2.78 lb	1.26 kg


Photometrics



PIVOT HLO - Flush



PIVOT HLO Drop - 0.5D



PIVOT HLO Drop - 1D

Module Wattage (W)

NOMINAL LENGTH	LUMEN PACKAGE at 35K/80 CRI		
	500	750	1000
1FT	5.1 W	7.7 W	10.3 W
2FT	10.2 W	15.4 W	20.6 W
3FT	15.3 W	28.1 W	30.9 W
4FT	20.4 W	30.8 W	41.2 W
5FT	25.5 W	38.5 W	51.5 W
6FT	30.6 W	46.2 W	61.8 W
7FT	35.7 W	53.9 W	72.1 W
8FT	40.8 W	61.6 W	82.4 W

Multiplier - CCT/CRI

CCT (K)	Lumens		
	CRI80	CRI90	CRI95
2700	0.96	0.81	0.80
3000	0.99	0.83	0.83
3500	1.00	0.85	0.84
4000	1.03	0.87	0.86

Multiplier - Drop lens

Lens position	Watts	Lumens
Flush Lens	1.00	1.00
Drop Lens 0.5"	1.00	1.30
Drop Lens 1.0"	1.00	1.30

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM


LUMENWERX



Project: _____

Type: _____

PIVOT WALL WASH

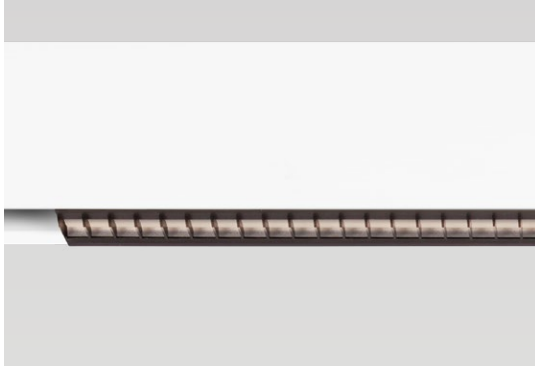

DESCRIPTION

Pivot Wall Wash offers a fresh, two-tiered strategy to wall washing with its Total Internal Reflector (TIR) optic and a louver available in black or white. This approach results in an impressive minimal 5% light spill, which differentiates Pivot's wall wash from others. Pivot Wall Wash is almost as fluid as a gentle wall grazer due to its impressive uniformity. It comes in 1-foot to 8-foot increments. Recommended spacing for 1-foot increments is 3 feet, 4 feet, and 5 feet on center. Pivot Wall Wash is an elegant asymmetric distribution and can achieve uniformity ratios of <3:1.

Pivot Wall Wash

LUMINAIRE ID	LENGTH	LIGHT SOURCE	CRI	LUMEN PACKAGE	COLOR TEMP.	LOUVER FINISH
PIVWW						
PIVWW - Pivot Wall Wash	1FT - 1' 2FT - 2' 3FT - 3' 4FT - 4' 5FT - 5' 6FT - 6' 7FT - 7' 8FT - 8'	SW - Static white FS - Full spectrum	80CRI ¹ - 80 CRI 90CRI ¹ - 90 CRI 95CRI - 95 CRI ¹ Not available with full spectrum.	350LMF - 350 lm/ft 500LMF ^{2,3} - 500 lm/ft 750LMF ^{4,5,6,7} - 750 lm/ft ² Not available with black louver at 95 CRI. ³ Not available with black louver at 7FT or 8FT. ⁴ Available for pendant track only. ⁵ Not available with black louver. ⁶ Not available with 95 CRI. ⁷ Not available with 8FT.	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	MF01 - Matte white MF04 - Matte black

MODULE FINISH	CHANNEL POSITION ⁸
TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options.	USC - Unified single channel DUC1 - Dual channel 1 DUC2 - Dual channel 2 ⁸ The channel position of each module must correspond to the channel option selected for the track. With USC, all modules will be controlled together. With DUC, specify either DUC1 or DUC2 for each module.

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM


LUMENWERX




Project: _____

Type: _____

Dimensions




PIVWW - Pivot Wall Wash



PIVWW - Pivot Wall Wash - Side view

NOMINAL LENGTH	A		WEIGHT	
	TOTAL LENGTH			
1FT	12 7/16"		0.53 lb	0.24 kg
2FT	28 7/16"		0.99 lb	0.45 kg
3FT	36 7/16"		1.48 lb	0.67 kg
4FT	48 7/16"		1.94 lb	0.88 kg
5FT	60 7/16"		2.42 lb	1.1 kg
6FT	72 7/16"		2.91 lb	1.32 kg
7FT	84 7/16"		3.39 lb	1.54 kg
8FT	96 7/16"		3.88 lb	1.76 kg

Photometrics



Module Wattage (W)

NOMINAL LENGTH	WHITE LOUVER			BLACK LOUVER	
	LUMEN PACKAGE at 35K/80 CRI			LUMEN PACKAGE at 35K/80 CRI	
	350	500	750	350	500
1FT	5.9 W	8.5 W	12.7 W	10.4 W	14.9 W
2FT	11.8 W	17 W	25.4 W	20.8 W	29.8 W
3FT	17.7 W	25.5 W	38.1 W	31.2 W	44.7 W
4FT	28.6 W	34 W	50.8 W	41.6 W	59.6 W
5FT	29.5 W	42.5 W	63.5 W	52 W	74.5 W
6FT	35.4 W	51 W	76.2 W	62.4 W	89.4 W
7FT	41.3 W	59.5 W	88.9 W	72.8 W	N/A
8FT	47.2 W	68 W	N/A	83.2 W	N/A

Multiplier - CCT/CRI

CCT (K)	Lumens		
	CRI80	CRI90	CRI95
2700	0.95	0.79	0.74
3000	0.98	0.81	0.76
3500	1.00	0.84	0.77
4000	1.00	0.84	0.79

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM

LUMENWERX



Project: _____

Type: _____

PIVOT CLUSTER MRO



DESCRIPTION


Pivot Cluster MRO adds the beneficial precision and scalability of the Cluster family of luminaires to the Pivot Track Lighting System. Based on a 1.2-inch square form, Pivot Cluster modules offer two optic options—soft edge MRO (Mini Reflector Optics), and sharp edge MRO (Mini Reflector Optics), as well as three baffle options—square, hyperbolic, and conical.

Pivot Cluster MRO

LUMINAIRE ID	LENGTH	OPTIC	LIGHT SOURCE	BEAM ANGLE	CRI	LUMEN PACKAGE ⁵
PIVCLUM	6IN					750LM
PIVCLUM - Pivot Cluster MRO 1x5	6IN - 6"	SOF - Soft edge downlight REF - Sharp edge downlight	SW - Static white FS - Full spectrum	SPT ¹ - Spot NFL ² - Narrow flood FLD - Flood WFL - Wide flood	80CRI ³ - 80 CRI 90CRI ³ - 90 CRI 95CRI ⁴ - 95 CRI	750LM - 750 lm, 9.4W ⁵ Lumen outputs are reduced with full spectrum, consult factory.

COLOR TEMP.	LOUVER TYPE	LOUVER FINISH	MODULE FINISH	CHANNEL POSITION ⁷
27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	HYP - Hyperbolic SQR - Square CON ⁶ - Conical ⁶ Faceplate finish matches the module finish. Only available in black or white.	MF01 - Matte white MF04 - Matte black BL05 - Black chrome GL06 - Gold CP06 - Copper	TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options.	USC - Unified single channel DUC1 - Dual channel 1 DUC2 - Dual channel 2 ⁷ The channel position of each module must correspond to the channel option selected for the track. With USC, all modules will be controlled together. With DUC, specify either DUC1 or DUC2 for each module.

Dimensions




PIVCLUM - Pivot Cluster MRO


NOMINAL LENGTH	WEIGHT	
6 IN	1.1 lb	0.5 kg

Photometrics

SOFT-EDGE DOWNLIGHT

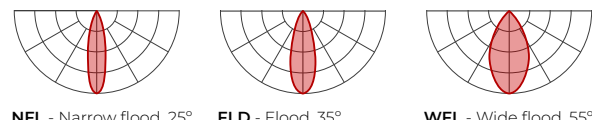

SHARP-EDGE DOWNLIGHT

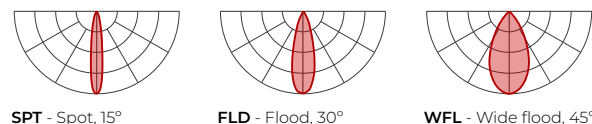

Module Wattage (W)

NOMINAL LENGTH	LUMEN PACKAGE at 35K/80 CRI
6 IN	750
	9.4 W

Multiplier - CCT/CRI

CCT (K)	Lumens	
	CRI80	CRI90
2700	0.96	0.84
3000	1.00	0.87
3500	1.00	0.89
4000	1.01	0.91

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM


LUMENWERX



Project: _____

Type: _____

PIVOT CLUSTER WALL WASH

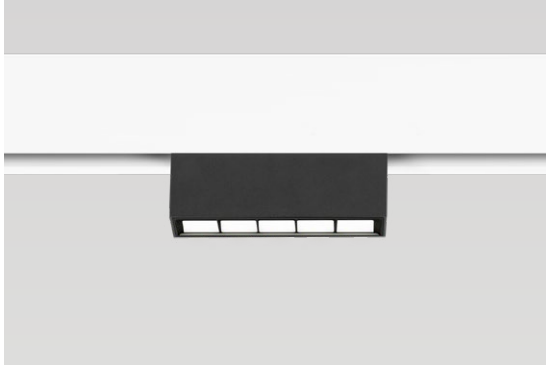

DESCRIPTION


Pivot Cluster Wall Wash 1x5 adds the beneficial precision and scalability of the Cluster family of luminaires to the Pivot Track Lighting System. Pivot Cluster Wall Wash maintain the small cell look of Cluster MRO option for Pivot. Based on a 1.2-inch square form, Pivot Cluster Wall Wash features an asymmetric distribution and is offered in both black and white louvered options.

Pivot Cluster Wall Wash

LUMINAIRE ID	LENGTH	LIGHT SOURCE	CRI	LUMEN PACKAGE ³	COLOR TEMP.	LOUVER FINISH
PIVCLUWW	6IN			500LM		
PIVCLUWW - Pivot Cluster Wall Wash 1x5	6IN - 6"	SW - Static white FS - Full spectrum	80CRI ¹ - 80 CRI 90CRI ¹ - 90 CRI 95CRI ² - 95 CRI ¹ Not available with full spectrum. ² Available with full spectrum only.	500LM - 500 lm, 9 W ³ Lumen outputs are reduced with full spectrum, consult factory.	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	MF01 - Matte white MF04 - Matte black

MODULE FINISH	CHANNEL POSITION ⁴
TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options.	USC - Unified single channel DUC1 - Dual channel 1 DUC2 - Dual channel 2 ⁴ The channel position of each module must correspond to the channel option selected for the track. With USC, all modules will be controlled together. With DUC, specify either DUC1 or DUC2 for each module.


Dimensions



PIVCLUWW
- Pivot Cluster Wall Wash

NOMINAL LENGTH	WEIGHT	
6 IN	1.1 lb	0.5 kg

Photometrics



Module Wattage (W)

NOMINAL LENGTH	LUMEN PACKAGE at 35K/80 CRI
	500
6 IN	9 W

Multiplier - CCT/CRI

CCT (K)	Lumens	
	CRI80	CRI90
2700	0.96	0.84
3000	1.00	0.87
3500	1.00	0.89
4000	1.01	0.91

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM


LUMENWERX



Project: _____

Type: _____

PIVOT CLUSTER LINEAR MRO

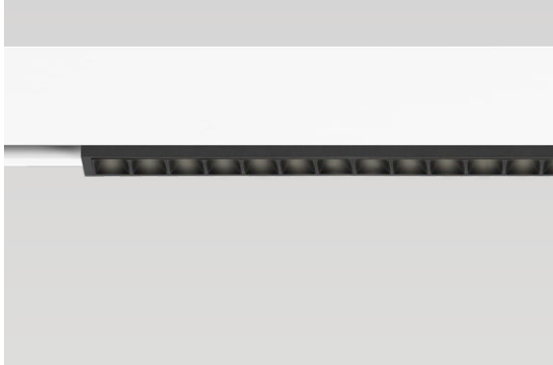

DESCRIPTION

Pivot Cluster Linear MRO adds the beneficial precision and scalability of the Cluster family of luminaires to the Pivot Track Lighting System. Based on a 1.2-inch square form, Pivot Cluster modules offer two optic options—soft edge and sharp edge, as well as three baffle options—square, hyperbolic, and conical. Pivot Cluster Linear MRO (Mini Reflector Optics) is offered in 4 lengths: 6" (1x5), 9" (1x7), 17" (1x14), and 25" (1x21).

Pivot Cluster Linear MRO

LUMINAIRE ID	LENGTH	OPTIC	LIGHT SOURCE	BEAM ANGLE	CRI	LUMEN PACKAGE ⁵
PIVCLULM						
PIVCLULM - Pivot Cluster Linear MRO	6IN - 6" (1x5) 9IN - 9" (1x7) 17IN - 17" (1x14) 25IN - 25" (1x21)	SOF - Soft edge downlight REF - Sharp edge downlight	SW - Static white FS - Full spectrum	SPT ¹ - Spot NFL ² - Narrow flood FLD - Flood WFL - Wide flood	80CRI ³ - 80 CRI 90CRI ³ - 90 CRI 95CRI ⁴ - 95 CRI	750LM - 750 lm, 9.4W (1x5) 1000LM - 1000 lm, 9.2W (1x7) 2000LM - 2000 lm, 18.4W (1x14) 3000LM - 3000 lm, 27.6W (1x21)
				¹ Available with REF optic option only. ² Available with SOF optic option only.	³ Not available with full spectrum. ⁴ Available with full spectrum only.	⁵ Lumen outputs are reduced with full spectrum, consult factory.

COLOR TEMP.	LOUVER TYPE	LOUVER FINISH	MODULE FINISH	CHANNEL POSITION ⁷
27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	HYP - Hyperbolic SQR - Square CON ⁶ - Conical ⁶ Faceplate finish matches the module finish. Only available in black or white.	MF01 - Matte white MF04 - Matte black BL05 - Black chrome GL06 - Gold CP06 - Copper	TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options.	USC - Unified single channel DUCC1 - Dual channel 1 DUCC2 - Dual channel 2 ⁷ The channel position of each module must correspond to the channel option selected for the track. With USC, all modules will be controlled together. With DUC, specify either DUC1 or DUC2 for each module.

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM


LUMENWERX




Project: _____

Type: _____

Dimensions




NOMINAL LENGTH	A		WEIGHT	
	TOTAL			
6IN	7 3/16"		0.57 lb	0.26 kg
9IN	9 9/16"		0.62 lb	0.28 kg
17IN	17 15/16"		1.1 lb	0.5 kg
25IN	26 3/8"		1.59 lb	0.72 kg




PIVCLULM - Pivot Cluster Linear MRO

Photometrics


SOFT-EDGE DOWNLIGHT



NFL - Narrow flood, 25°




FLD - Flood, 35°




WFL - Wide flood, 55°


SHARP-EDGE DOWNLIGHT



SPT - Spot, 15°



FLD - Flood, 30°



WFL - Wide flood, 45°

Module Wattage (W)

NOMINAL LENGTH	LUMEN PACKAGE at 35K/80 CRI	WATTAGE
6IN	750	9.4 W
9IN	1000	9.2 W
17IN	2000	18.4 W
25IN	3000	27.6 W

Multiplier - CCT/CRI

CCT (K)	Lumens	
	CRI80	CRI90
2700	0.96	0.84
3000	1.00	0.87
3500	1.00	0.89
4000	1.01	0.91

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM


LUMENWERX



Project: _____

Type: _____

PIVOT DOT

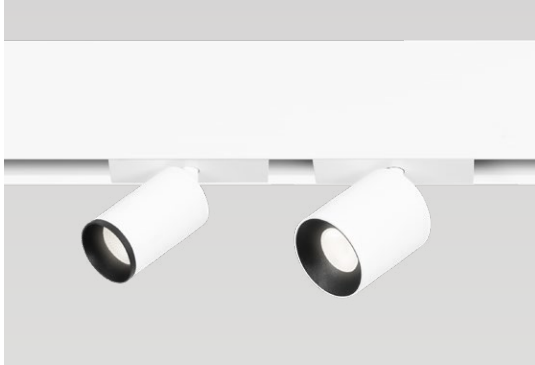

DESCRIPTION

Pivot Dot is a round spotlight offered in two sizes, and features three beam angles of 20, 35 and 50 degrees. Pivot Dot emits a subtle punch of light with 360-degree infinite rotation ability along with 90-degree vertical flexibility. It can be adapter mounted or 3-inch-stem mounted and is offered in 2.65-inch and 4-inch heights with two bevel options: standard and decorative. Pivot Dot is available in a wide range of colors.

Pivot Dot


LUMINAIRE ID	HEIGHT	LIGHT SOURCE	BEAM ANGLE	CRI	LUMEN PACKAGE ²	COLOR TEMP.
PIV1DT - Pivot 1" Dot PIV2DT - Pivot 2" Dot	2.65IN - 2.65" 4IN - 4"	SW - Static white FS - Full spectrum	SPT - Spot, 20° FLD - Flood, 35° WFL - Wide flood, 50°	80CRI ¹ - 80 CRI 90CRI ¹ - 90 CRI 95CRI - 95 CRI	700LM - 700 lm, 9.4 W (1IN at 2.65" height) 750LM - 750 lm, 11 W (2IN at 2.65" height) 850LM - 850 lm, 12.8 W (1IN at 4" height) 900LM - 900 lm, 15.8 W (2IN at 4" height)	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K

¹ Not available with full spectrum.


² Lumen outputs are reduced with full spectrum, consult factory.

BAFFLE	BAFFLE FINISH	AIMABLE ARM ⁴	MODULE FINISH ⁵	TRACK ADAPTER FINISH	CHANNEL POSITION ⁶
SDB - Standard baffle DCB ³ - Decorative baffle	TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL # See page 18 for more finish options.	FH - Flush STEM - 3" long stem ⁴ 90° tilt, infinite rotation.	TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options.	TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options.	USC - Unified single channel DUC1 - Dual channel 1 DUC2 - Dual channel 2 ⁶ The channel position of each module must correspond to the channel option selected for the track. With USC, all modules will be controlled together. With DUC, specify either DUC1 or DUC2 for each module.


Photometrics



SPT - Spot, 20°



FLD - Flood, 35°



WFL - Wide flood, 50°

Module Wattage (W)

SIZE	HEIGHT	LUMEN PACKAGE at 35K/80 CRI	WATTAGE
1IN	2.65"	700	9.4 W
	4"	850	12.8 W
2IN	2.65"	750	11 W
	4"	900	15.8 W

Multiplier - CCT/CRI

CCT (K)	Lumens		
	CRI80	CRI90	CRI95
2700	0.94	0.77	0.72
3000	0.96	0.82	0.75
3500	1.00	0.85	0.81
4000	1.02	0.87	0.79

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM

LUMENWERX




Project: _____


Type: _____

DIMENSIONS


Flush Arm (shown with Pivot Dot 2IN)




Flush arm
- Standard baffle



Flush arm
- Decorative baffle




Maximum length
- 90° tilt




SIZE	A ACTUAL SIZE	B TOTAL LENGTH		C MAX. LENGTH (90° tilt)		WEIGHT	
		Standard baffle	Decorative baffle	Standard baffle	Decorative baffle		
1IN	Ø 1 21/32"	2 5/8"	2 13/16"	2 15/16"	3 1/8"	0.55 lb	0.25 kg
		4"	4 3/16"	4 5/16"	4 7/16"	0.77 lb	0.35 kg
2IN	Ø 2 3/16"	2 5/8"	2 13/16"	2 15/16"	3 1/8"	0.66 lb	0.3 kg
		4"	4 3/16"	4 5/16"	4 7/16"	1.1 lb	0.5 kg


Stem (shown with Pivot Dot 2IN)



Stem
- Standard baffle



Stem
- Decorative baffle



Maximum length
- 90° tilt

SIZE	A ACTUAL SIZE	B TOTAL LENGTH		C MAX. LENGTH (90° tilt)		WEIGHT	
		Standard baffle	Decorative baffle	Standard baffle	Decorative baffle		
1IN	Ø 1 21/32"	2 5/8"	2 13/16"	2 15/16"	3 1/8"	0.55 lb	0.25 kg
		4"	4 3/16"	4 5/16"	4 7/16"	0.77 lb	0.35 kg
2IN	Ø 2 3/16"	2 5/8"	2 13/16"	2 15/16"	3 1/8"	0.66 lb	0.3 kg
		4"	4 3/16"	4 5/16"	4 7/16"	1.1 lb	0.5 kg

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM

LUMENWERX



Project: _____

Type: _____

PIVOT BOX



DESCRIPTION


Pivot Box is a square spotlight offered in two sizes, and features three beam angles of 20, 35 and 50 degrees. Pivot Box emits a subtle punch of light with 360-degree infinite rotation ability along with 90-degree vertical flexibility. It can be adapter mounted or 3-inch-stem mounted and is offered in 2.65-inch and 4-inch heights with two bevel options: standard and decorative. Pivot Box is available in a wide range of colors.

Pivot Box


LUMINAIRE ID	HEIGHT	LIGHT SOURCE	BEAM ANGLE	CRI	LUMEN PACKAGE ²	COLOR TEMP.
PIV2BX						
PIV2BX - Pivot 2" Box	2.65IN - 2.65" 4IN - 4"	SW - Static white FS - Full spectrum	SPT - Spot, 20° FLD - Flood, 35° WFL - Wide flood, 50°	80CRI ¹ - 80 CRI 90CRI ¹ - 90 CRI 95CRI - 95 CRI	750LM - 750 lm, 11 W (2.65" height) 900LM - 900 lm, 15.8 W (4" height)	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K
				¹ Not available with full spectrum.	² Lumen outputs are reduced with full spectrum, consult factory.	

BAFFLE	BAFFLE FINISH	AIMABLE ARM ³	MODULE FINISH ⁴	TRACK ADAPTER FINISH	CHANNEL POSITION ⁵
SDB - Standard baffle DCB ³ - Decorative baffle	TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options.	FH - Flush STEM - 3" long stem ³ 90° tilt, infinite rotation.	TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options. ⁴ Arm finish will match module.	TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options.	USC - Unified single channel DUC1 - Dual channel 1 DUC2 - Dual channel 2 ⁵ The channel position of each module must correspond to the channel option selected for the track. With USC, all modules will be controlled together. With DUC, specify either DUC1 or DUC2 for each module.
³ Recommended when a different finish is desired for the baffle.					


Photometrics



SPT - Spot, 20°



FLD - Flood, 35°



WFL - Wide flood, 50°

Module Wattage (W)

SIZE	HEIGHT	LUMEN PACKAGE at 35K/80 CRI	WATTAGE
2IN	2.65"	750	11 W
	4"	900	15.8 W

Multiplier - CCT/CRI

CCT (K)	Lumens		
	CRI80	CRI90	CRI95
2700	0.94	0.77	0.72
3000	0.96	0.82	0.75
3500	1.00	0.85	0.81
4000	1.02	0.87	0.79

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM

LUMENWERX




Project: _____


Type: _____

DIMENSIONS


Flush Arm




PIV2BX - Pivot 2" Box - Flush
- Standard baffle



PIV2BX - Pivot 2" Box - Flush
- Decorative baffle




Maximum length
- Standard baffle
- 90° tilt




Maximum length
- Decorative baffle
- 90° tilt

SIZE	HEIGHT	WEIGHT	
2IN	2 5/8"	0.68 lb	0.31 kg
	4"	1.12 lb	0.51 kg


Stem




PIV2BX - Pivot 2" Box - Stem
- Standard baffle



PIV2BX - Pivot 2" Box - Stem
- Decorative baffle



Maximum length
- Standard baffle
- 90° tilt



Maximum length
- Decorative baffle
- 90° tilt

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM

LUMENWERX



Project: _____

Type: _____

PIVOT CYLINDER



DESCRIPTION


Pivot Cylinder is our most powerful point source module with slim 1.5- and 2-inch profiles and four height options: 6-inch, 9-inch, 12-inch, and 18-inch. Pivot Cylinder is offered in three beam angles of 20, 35 and 50 degrees. Pivot Cylinders come with the option of a standard or decorative bevel.

Pivot Cylinder


LUMINAIRE ID	HEIGHT	LIGHT SOURCE	BEAM ANGLE	CRI	LUMEN PACKAGE ²	COLOR TEMP.
PIV1CY - Pivot 1" Cylinder PIV2CY - Pivot 2" Cylinder	6IN - 6" 9IN - 9" 12IN - 12" 18IN - 18"	SW - Static white FS - Full spectrum	SPT - Spot, 20° FLD - Flood, 35° WFL - Wide flood, 50°	80CRI ¹ - 80 CRI 90CRI ¹ - 90 CRI 95CRI - 95 CRI	700LM - 700 lm, 9.4 W (1IN) 750LM - 750 lm, 11 W (2IN) 850LM - 850 lm, 12.8 W (1IN) 900LM - 900 lm, 15.8 W (2IN)	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K
				¹ Not available with full spectrum.	² Lumen outputs are reduced with full spectrum, consult factory.	

BAFFLE	BAFFLE FINISH	MODULE FINISH	TRACK ADAPTER FINISH	SUSPENSION	SUSPENSION LENGTH	CHANNEL POSITION ⁴
SDB - Standard baffle DCB ³ - Decorative baffle	TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options.	TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options.	TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options.	PCB - Black power cord PCW - White power cord	12IN - 12" 28IN - 28" 36IN - 36" 48IN - 48"	USC - Unified single channel DUC1 - Dual channel 1 DUC2 - Dual channel 2 ⁴ The channel position of each module must correspond to the channel option selected for the track. With USC, all modules will be controlled together. With DUC, specify either DUC1 or DUC2 for each module.
³ Recommended when a different finish is desired for the baffle.						


Photometrics



SPT - Spot, 20°



FLD - Flood, 35°



WFL - Wide flood, 50°

Module Wattage (W)

SIZE	LUMEN PACKAGE at 35K/80 CRI	WATTAGE
1IN	700	9.4 W
	850	12.8 W
2IN	750	11 W
	900	15.8 W

Multiplier - CCT/CRI

CCT (K)	Lumens		
	CRI80	CRI90	CRI95
2700	0.94	0.77	0.72
3000	0.96	0.82	0.75
3500	1.00	0.85	0.81
4000	1.02	0.87	0.79

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM


LUMENWERX




Project: _____

Type: _____


DIMENSIONS

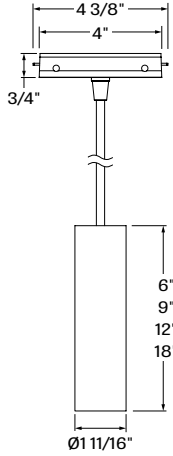


PIV1CY - Pivot 1" Cylinder
- Standard baffle

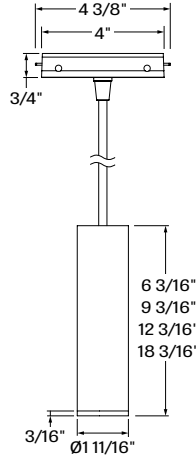

PIV1CY - Pivot 1" Cylinder
- Decorative baffle

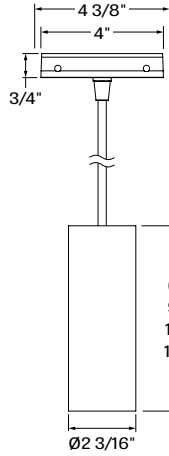

PIV2CY - Pivot 2" Cylinder
- Standard baffle

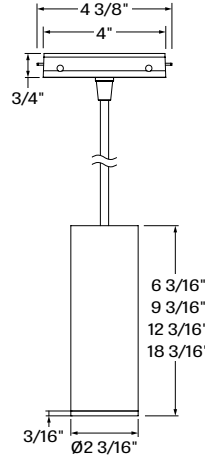

PIV2CY - Pivot 2" Cylinder
- Decorative baffle

SIZE	HEIGHT	WEIGHT	
1IN	6IN	0.88 lb	0.4 kg
	9IN	0.99 lb	0.45 kg
	12IN	1.1 lb	0.5 kg
	18IN	1.43 lb	0.65 kg
2IN	6IN	1.21 lb	0.55 kg
	9IN	1.43 lb	0.65 kg
	12IN	1.54 lb	0.7 kg
	18IN	1.87 lb	0.85 kg

PIVOT MODULE

STATIC WHITE


LUMENWERX



Project: _____

Type: _____

PIVOT GLOBE

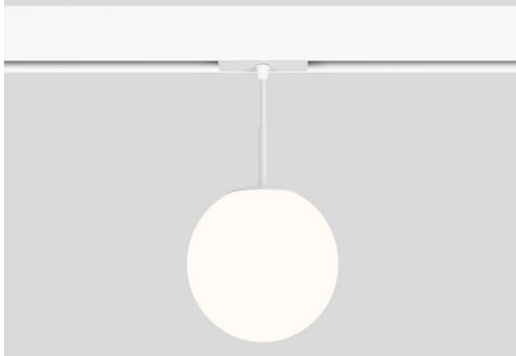


DESCRIPTION

Pivot Globe offers uniform light distribution and the timeless appeal of the spherical form. Made from frosted glass, the luminaire is lit fully with our Isotropic Radiant Optic™ (IRO™) that distributes light smoothly and evenly in all directions, thereby avoiding undesirable hotspots. Available in 4", 6", and 8" diameters.

Pivot Globe

LUMINAIRE ID	SIZE	OPTIC	LIGHT SOURCE	CRI	LUMEN PACKAGE
PIVGLB		IRO	SW		
PIVGLB - Pivot Globe	4IN - 4" diameter 6IN - 6" diameter 8IN - 8" diameter	IRO - Isotropic Radiant Optic	SW - Static white	80CRI - 80 CRI 90CRI - 90 CRI 95CRI - 95 CRI	300LM - 300 lm (Ø4") 600LM - 600 lm (Ø6") 900LM - 900 lm (Ø8")
COLOR TEMPERATURE	MODULE FINISH	TRACK ADAPTER FINISH	SUSPENSION	SUSPENSION LENGTH	CHANNEL POSITION ¹
27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options.	TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options.	PCB - Black power cord PCW - White power cord	12IN - 12" 28IN - 28" 36IN - 36" 48IN - 48"	USC - Unified single channel DUC1 - Dual channel 1 DUC2 - Dual channel 2 ¹ The channel position of each module must correspond to the channel option selected for the track. With USC, all modules will be controlled together. With DUC, specify either DUC1 or DUC2 for each module.

Photometrics




Module Wattage (W)

SIZE	LUMEN PACKAGE at 35K/80 CRI	WATTAGE
4 IN	300	8 W
6 IN	600	15 W
8 IN	900	23 W

Multiplier - CCT/CRI

CCT (K)	Lumens		
	CRI80	CRI90	CRI95
2700	0.94	0.77	0.72
3000	0.96	0.82	0.75
3500	1.00	0.85	0.81
4000	1.02	0.87	0.79

Dimensions

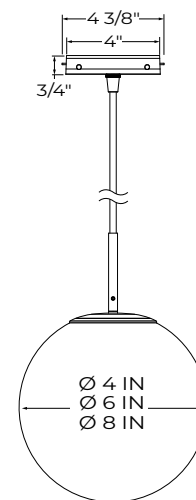

SIZE	WEIGHT	
4 IN	1.1 lb	0.5 kg
6 IN	1.8 lb	0.8 kg
8 IN	2.6 lb	1.2 kg

PIVOT MODULE


LUMENWERX



Project: _____

Type: _____

PIVOT BLANK

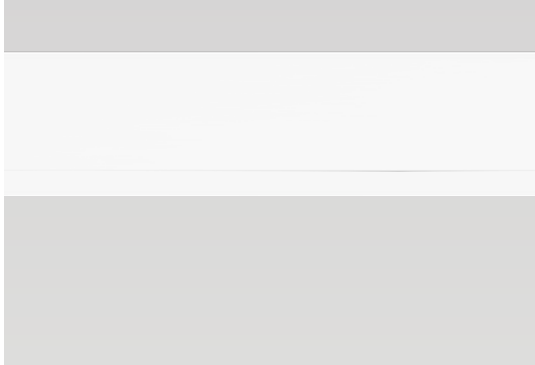


DESCRIPTION

Pivot Blank modules are unlit modules that click into the bottom of the Pivot Track system. Their purpose is to mask unlit track portions. Blank modules fit smoothly and securely to the track and are offered in 31 colors.


Pivot Blank

LUMINAIRE ID	LENGTH	MODULE FINISH
PIVBLA		
PIVBLA - Pivot Blank	1FT - 1' 2FT - 2' 3FT - 3' 4FT - 4' 5FT - 5' 6FT - 6' 7FT - 7' 8FT - 8'	TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 18 for more finish options.

Dimensions



PIVBLA - Pivot Blank



PIVBLA - Pivot Blank - Side view

NOMINAL LENGTH	A		WEIGHT	
	TOTAL LENGTH			
1FT	12 7/16"		0.4 lb	0.18 kg
2FT	28 7/16"		0.73 lb	0.33 kg
3FT	36 7/16"		1.08 lb	0.49 kg
4FT	48 7/16"		1.41 lb	0.64 kg
5FT	60 7/16"		1.75 lb	0.8 kg
6FT	72 7/16"		2.09 lb	0.95 kg
7FT	84 7/16"		2.43 lb	1.11 kg
8FT	96 7/16"		2.78 lb	1.26 kg

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM

LUMENWERX




Project: _____


Type: _____

Finishes

Standard




TMW - Textured Matte White




TMB - Textured Matte Black

Custom


Neutrals




CRM - Cream



GRY - Gray



STG - Steel Gray



SAG - Sage Gray




MOG - Moss Gray



BLB - Black Blue

Designer



ALM - Almond



QRZ - Quartzite Texture



RST - Rust Fine Texture




GRB - Green Beige



YLW - Yellow




SLM - Salmon Pink




VIO - Pastel Violet



RED - Red



PRR - Purple Red



SMB - Storm Blue




DPB - Deep Blue




OCB - Ocean Blue



BLG - Blue Green



GNS - Green Smoke




MNG - Mint Green




LMG - Lime Green


Metallics




SND - Sand



GLD - Gold




DGD - Dark Gold



IRN - Iron Ore



CNY - Canyon



SBP - Sandblast Copper



SWD - Sandalwood

Some colors may have longer lead time.

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM

LUMENWERX



Project: _____

Type: _____

Technical Specifications

OPTICS

High-Efficiency Lambertian Optic (HLO)

Shielding of diffusing 0.075" thick acrylic provides up to 88% transmission and good obscuration. Matte white reflectors distribute LED output across the shielding. Luminaire brightness is controlled by the ratio of luminous flux to shielding area.

Wall Wash Optic (WW)

Wall Wash optics use multiple mid-flux emitters in a continuous array, supported by an angled board. An aluminum reflector collects and redirects emitter flux, while a refractive film adjusts both vertical and horizontal intensity and eliminates source image. The result is excellent uniformity up and down the wall, as well as between luminaires.

Soft-Edged Feathered Beam (SOF)

The Soft-Edged Feathered Beam blends the light into darker areas for a gentle brightness transition. Each LED emitter directs light through a single, custom molded circular optic using total internal reflection (TIR) to shape the light. A 0.5" reflective square louver provides a cut off with a UGR of 10. Three different TIR elements create a choice of beam spread: 25° narrow flood (NFL), 35° flood (FLD), or 55° wide flood (WFL).

Sharp-Edged Cut-Off Beam (REF)

The Sharp-Edged Cut-Off Beam creates dramatic impact, limiting the spread of light outside of the primary beam. A molded conical reflector redirects light from each emitter into the desired beam angle. A 0.5" reflective square louver provides a cut off with a UGR of 10. Three different TIR elements create a choice of beam spread: 15° spot (SPT), 30° flood (FLD), or 45° wide flood (WFL).

CircaFlex™ Optic

The Pivot Dot/Box/Cylinder CircaFlex™ Optic, at just 1.2", uses advanced beam-splitting technology to allow light to follow an intended optical path with maximal precision, minimal spread, and even distribution.

Isotropic Radiant Optic™ (IRO™)

The Isotropic Radiant Optic™ (IRO™) is a spherical lens designed with a spike-textured surface through which light rays are diffused outward and equally in all directions.

LIGHT SOURCE - STATIC WHITE

LEDs are available in 2700K, 3000K, 3500K and 4000K with a choice of 80 CRI, 90 CRI, or 95 CRI, with elevated R9 value for 90 CRI and above. Color consistency is maintained to within 2 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

LIGHT SOURCE - FULL SPECTRUM

The full spectrum LED option offers improved color particularly in the cyan region that is beneficial in both healthcare and circadian lighting strategies. The cyan region in full spectrum LED is richer at the 480 nm range.



WELL for Light - The WELL building standard focuses on light quality in several features. There are three categories that are fully attributed to the construction and features of a luminaire. In WELL V1, it's Feature 54 Circadian Lighting, Feature 55 Glare Control, and Feature 58 Color Quality. In WELL V2, it's Feature L03 Circadian Lighting, Feature L04 Glare Control, and Feature L07 Electric Light Quality.

This fixture meets Features:

- Feature 54 or L03 when full spectrum LED is selected
- Feature 58 or L07 when 90 CRI or above is selected

All LED drivers used at Lumenwerx are deemed to have a low risk level of flicker, of 5 % or less below 90Hz operational as defined by IEEE standard 1789-2015 LED.



WELL for Mind - This luminaire meets WELL for mind as it is a human centric luminaire offering quality light, excellent color, and smooth optics. If any of these features are incorporated in a luminaire, it can improve the ability to focus, concentrate, and persist longer on a given task. This fixture harmoniously operates in a space to assist the mind.

For more information, please contact well@lumenwerx.com

PIVOT MODULE

STATIC WHITE, FULL SPECTRUM

LUMENWERX




Project: _____

Type: _____

LOCKING MECHANISM

The Pivot module vertical V-Lock is a micro mechanism that is easy to use and ensures that each module is secured to the Track. It is activated with a simple push of a button located on the surface of the end cap adapter. To release the module, pull down the tab of the locking mechanism.

The Pivot module horizontal V-Lock is a micro mechanism that is easy to use and ensures that each module is secured to the Track. The V-Lock is automatic when the module is pushed in place. To release the module, simply push the two side buttons to remove from the track.



Pivot Module Vertical V-Lock



Pivot Module Horizontal V-Lock

CONSTRUCTION

Track adapter - Extruded aluminum, up to 90% recycled content

Module housing - Extruded aluminum, up to 90% recycled content

Reflectors - Cold rolled steel die formed, 95% reflective matte white painted

Diffuser

HLO - Extruded acrylic

WW - Extruded acrylic with optic overlay

Drop diffuser - Extruded with glued end caps

End caps - Die cast aluminum

CERTIFICATIONS

ETL - Rated for Indoor Dry locations. Conforms to UL Standard 1574 and certified to CAN/CSA Standard C22.2 No. 250.0.

WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.