

PIVOT

TRACK - RECESSED

LUMENWERX



Project: _____

Type: _____

DESCRIPTION

Pivot is an architectural 48V linear magnetic track lighting system for recessed mounting. The Recessed Track is low voltage and accommodates the Pivot Track Modules. It possesses infinite run capabilities in segments of up to 8 feet with smooth transitions at the joint. It can also be branched out horizontally and vertically to create a multitude of shapes, patterns, and effects for various architectural applications. The Track is offered in different circuit and control channel variations.





Project: _____

Type: _____

Track

Example: PIVR-CR-9FT6IN(2X3FT-1X3FT6IN)-NA-120V-D1-USC-1C1CCUD-NA-DMF-TMB-B-NA


A drawing of your pattern is required - anything from a line drawing to an architectural drawing. You can also use the grid on page 3 to sketch your layout.

LUMINAIRE ID	TRACK TYPE	LUMINAIRE LENGTH ³	CORNER TYPE ⁴
PIVR			
PIVR - Pivot Recessed	CR ¹ - Continuous run PAT ² - Pattern ¹ A straight linear shape with no corners. ² A shape or pattern containing at least 1 corner.	##FT##IN (#X#FT#IN-#X#FT#IN-...) - ##FT##IN : total nominal length of continuous run or pattern in feet or inches (2' or longer) #X : quantity of each section #FT#IN : nominal length of each section in feet, specify between 2' and 8' ³ Consult the Maximum Track Wattage table on page 3 to determine the maximum load allowed per section.	#LEVC90 ⁵ - Leveled 90° corner in ceiling #INN90 - Inside 90° corner NA - None ⁴ Specify number of corners (#) for each required corner type. ⁵ Consult factory for other degree angles.


VOLTAGE	DIMMING	TRACK CHANNEL	CONTROL CHANNEL ⁹	EMERGENCY SECTION
120V - 120V 277V - 277V UNV - 120V-277V	ND - Non-dimming D1 - 1% 0-10V DA ⁶ - DALI LECS ^{6,7,8} - Lutron EcoSystem ⁶ On-site commissioning is required. ⁷ Only available with USC, 1 circuit, and 1 control channel option (1C1CCUD). ⁸ Comes with a control box that must be installed remotely.	USC - Unified single channel DUC - Dual channel	1C1CCUD - 1 circuit, 1 control channel (USC) 1C2CCDD - 1 circuit, 2 control channels (DUC channel 1 - DUC channel 2) 2C2CCDD - 2 circuits, 2 control channels (DUC channel 1 - DUC channel 2) ⁹ For more details, please see the circuit and channel specification below.	EC ¹⁰ - Emergency light section NA - None ¹⁰ Consult factory.

MOUNTING	OUTSIDE FINISH	INSIDE FINISH	OPTIONS
GRD - Grid ceiling DMF - Drywall mud flange	TMB - Textured matte black TMW - Textured matte white CF# - Custom finish, specify RAL# See page 4 for more finish options.	B - Black W - White	FU120 - Fuse 120V FU277 - Fuse 277V NA - None

Dimensions

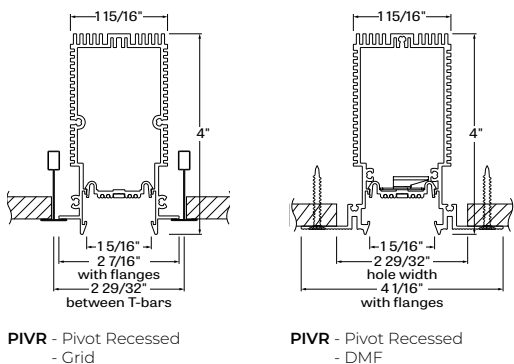

Circuit and channel specification

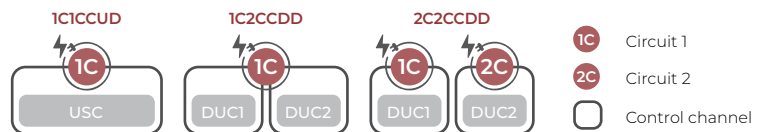

CURRENT LIMITER

The Pivot Track system is based on a low-voltage (48VDC) design that integrates the AC/DC conversion inside the body of the track (except for Surface). The AC/DC 48V power supplies inside the fixture are inherently limited to specific wattages intended to provide at least 12W/ft. Accordingly, if a track section is overloaded with modules, the system can never draw more than the rating of the power supply inside. In situations where the wattage of the modules installed exceeds the rated wattage of the integral power supply, flashing will typically occur to indicate an overload event.


Project: _____

Type: _____

Track Details

Use the grid below to sketch and label the layout of your Pivot Track.

- Build your continuous run or pattern using track sections of 2' to 8'.
- The total wattage of all the modules installed in a track section must not exceed the maximum track wattage per section length (see table). Consult the Pivot Module spec sheet for the wattages of each module.
- Leveled corners (LEV) are not available with grid ceilings.
- Corners are unlit with 6" x 6" blanks.
- Track length is not field adjustable.



LEVC90
- Leveled 90° corner in ceiling



INN90
- Inside 90° corner

Maximum Track Wattage *

at 35K at 80 CRI

! Do not exceed the maximum wattage allowed per section of track.

LENGTH	USC	DUC	
		Channel 1	Channel 2
2FT	24 W	12 W	12 W
3FT	36 W	18 W	18 W
4FT	48 W	24 W	24 W
5FT	60 W	30 W	30 W
6FT	72 W	36 W	36 W
7FT	84 W	42 W	42 W
8FT	96 W	48 W	48 W


* To determine the maximum wattage allowed per section of track, multiply the length of your section by 12 W/ft.

Maximum Track Length Per Power Feed *

VOLTAGE	LENGTH
120V	60FT
277V	140FT

* Assuming 12W/ft, track with 1 circuit (1C1CCUD or 1C2CCUD). For other scenarios, consult factory.

Pattern example




1. Specify the **TOTAL LUMINAIRE LENGTH** in feet or inches.

Example: 16FT(4X4FT)


2. Specify the quantity of each **CORNER TYPE**.

Example: 4LEVC90

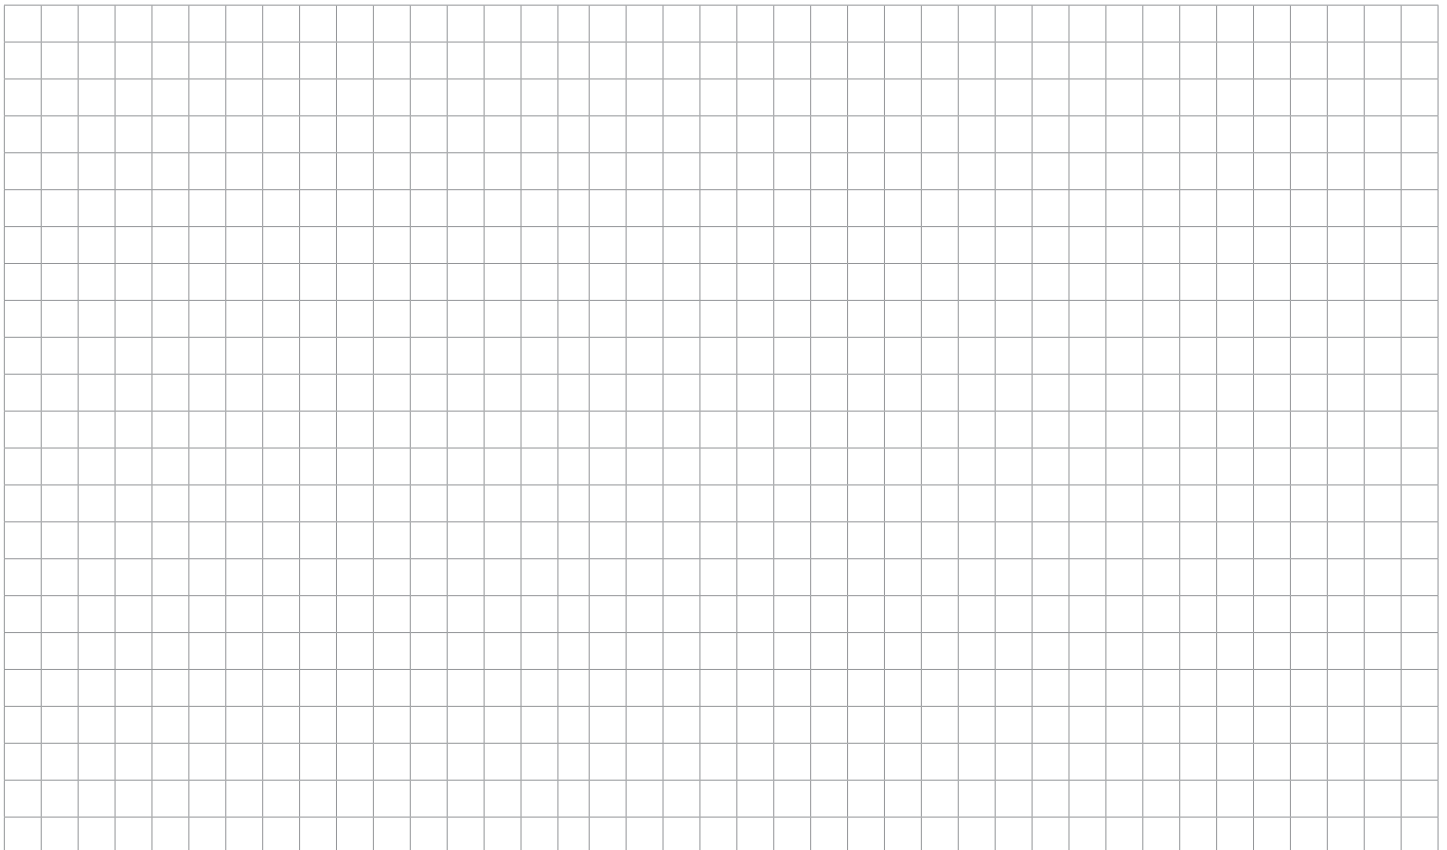

Finishes

Standard




TMW - Textured Matte White




TMB - Textured Matte Black

Custom


Neutrals



CRM - Cream



GRY - Gray



STG - Steel Gray



SAG - Sage Gray




MOG - Moss Gray



BLB - Black Blue

Designer



ALM - Almond



QRZ - Quartzite Texture



RST - Rust Fine Texture



GRB - Green Beige



YLW - Yellow



SLM - Salmon Pink



VIO - Pastel Violet



RED - Red



PRR - Purple Red



SMB - Storm Blue



DPB - Deep Blue




OCB - Ocean Blue



BLG - Blue Green



GNS - Green Smoke




MNG - Mint Green




LMG - Lime Green


Metallics




SND - Sand




GLD - Gold




DGD - Dark Gold



IRN - Iron Ore



CNY - Canyon



SBP - Sandblast Copper



SWD - Sandalwood

Some colors may have longer lead time.

Technical Specifications

LUMINAIRE LENGTH

Pivot track is available as either as a continuous run (straight linear shape with no Linx) or as a pattern (shape or pattern containing at least 1 Linx). It is built using track sections of 2' to 8'. The total nominal length must be specified in the product code, as well as the quantity and nominal length of each section. Lengths can be ordered in 1 foot increments. The track length is not field adjustable.

All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.



ELECTRICAL

The Pivot Track is powered by an integral (except for Surface) 48VDC, Class 2, SELV power supply with universal (120-277VAC) input. Rated lifetime of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 90%, PF > 0.9, THD < 20%. The power supply is coupled to a proprietary dimming interface which allows one or both track channels to be controlled together or independently using a 0-10V or DALI signal. Both the power supply and the dimming interface can be serviced from below. For applications requiring Lutron Ecosystem control, a separate, remote interface can be provided to translate Ecosystem to 0-10V.


MOUNTING OPTIONS

Recessed fixtures can be mounted into exposed or concealed T-bar or tegular ceiling, as well as in drywall ceilings/walls.

FINISH

Outside - Standard powder-coat paint available in textured matte white and black. Custom colors are also available in over 30 colors.

Inside - White or black



CONSTRUCTION

Track housing - Extruded aluminum, up to 90% recycled content

Joining system - Die cast zinc

Blank cover - Extruded aluminum

End plate - Aluminum sheet 0.19" thick

WEIGHT

2ft - 5.5 lbs - 2.5 kg

4ft - 9.9 lbs - 4.5 kg

6ft - 14.6 lbs - 6.6 kg

8ft - 19.4 lbs - 8.8 kg

CERTIFICATIONS

ETL - Rated for Indoor Dry locations. Conforms to UL Standard 1574 and certified to CAN/CSA Standard C22.2 No. 250.0.

WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.