


Our Slip Fit Arms are constructed of square or round steel tubing (11G) with 2-3/8" OD horizontal tenons. Each adaptor is secured with 3/8" stainless steel Allen Sets Screws and use black plastic snap-in end caps. They are easy to install by slipping over any existing pole or tenon. Slip Fit Arms feature a very low EPA and are available up to 24" in length. Consult with factory for a custom configurations.



Cat #	Tenon Length	Pole Diameter To Fit Over	Color
Square Slip Fit Arm Single (SSFA-SGL)	9" (9) <i>* Fixture Size 1</i>	4" SQ (4S) 5" SQ (5S)	Bronze (BRZ) White (WHT) Silver (SVR)
Square Slip Fit Arm Double 90° (SSFA-D90)	18" (18) <i>* Fixture Sizes 2 + 3</i>	5½" SQ (512S)	Black (BLK) Green (GRN)
Square Slip Fit Arm Double 180° (SSFA-D180)	24" (24) <i>* Extended Option</i>		Hunter Green (HGN) Graphite (GPH) Grey (GRY) Custom (CS)
Square Slip Fit Arm Triple 90° (SSFA-T90)			
Square Slip Fit Arm Quad (SSFA-QD)			

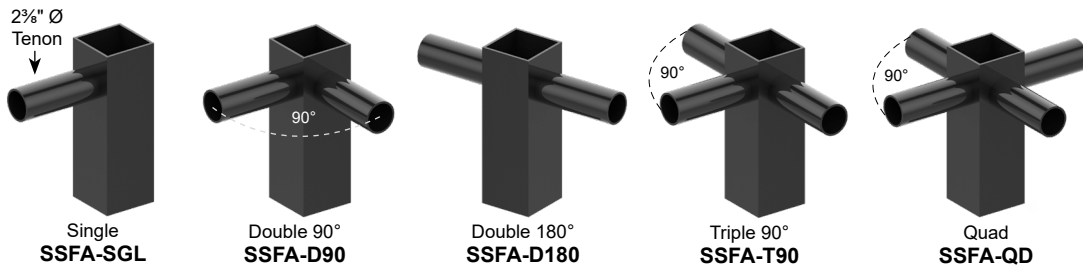

Cat #	Tenon Length	Pole Diameter To Fit Over	Color
Round Slip Fit Arm Single (RSFA-SGL)	9" (9) <i>* Fixture Size 1</i>	2¾" OD (238R) 3" OD (3R)	Bronze (BRZ) White (WHT) Silver (SVR)
Round Slip Fit Arm Double 90° (RSFA-D90)	18" (18) <i>* Fixture Sizes 2 + 3</i>	3½" OD (312R) 4" OD (4R)	Black (BLK) Green (GRN)
Round Slip Fit Arm Double 180° (RSFA-D180)	24" (24) <i>* Extended Option</i>	4½" OD (412R) 5" OD (5R)	Hunter Green (HGN) Graphite (GPH) Grey (GRY) Custom (CS)
Round Slip Fit Arm Triple 90° (RSFA-T90)		5½" OD (512R)	
Round Slip Fit Arm Triple 120° (RSFA-T120)			
Round Slip Fit Arm Quad (RSFA-QD)			