

APEX II

Outer Acrylic Interior Pendant

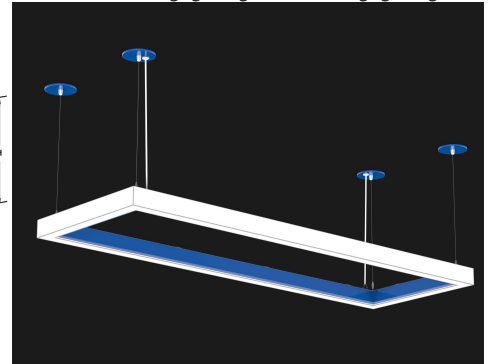







9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs are field serviceable.
 Lower Output: Lamping code ending with LO features lower lumen output.
 LED Dimming: Standard 1% 0-10V dimming.
 Driver: Max remote driver installation distance:
 White LED 25ft from fixture body and RGB 45ft from fixture body.
 See Cubix/Apex Hanger Guide for more information.
 RGB: DMX controller supplied by others.
 Cable Hanger: Standard 150" cable and white cord for on-site adjustability.
 Canopy: Matches fixture finish.
 Finish: Highly durable oven cured no VOC premium powder coat.
 Surge Protection: External surge protector provided as standard.



SAMPLE CATALOG NUMBER:		B-	BLK-	1-	A
GL-2780-					
MODEL NO.	LAMPING	FINISH	HANGER	OPTIONS	
GL-2780 W in 24"x48" 10lbs B in 3" 4.5kg H in 11"-145"	A. 36LED30 AL. 36LED30LO B. 36LED35 BL. 36LED35LO C. 36LED40 CL. 36LED40LO D. RGB	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBN-Terra Brown TBZ-Textured Bronze Premium: SA-Satin Aluminum	1. Cable - Standard  Drivers mounted remotely. See Apex Hanger Guide for more information.	A. No Options BC. Black Cord Fixture supplied with black power cord. EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.	
GL-2781 W in 24"x72" 15lbs B in 3" 6.8kg H in 18.75"-145"	E. 48LED30 EL. 48LED30LO F. 48LED35 FL. 48LED35LO G. 48LED40 GL. 48LED40LO H. RGB		2. Oversized  Drivers mounted inside oversized canopy. See Apex Hanger Guide for more information.		
			3. Vertical Remote Canopy  Drivers mounted remotely. See Apex Hanger Guide for more information.		
			4. Vertical Integral Canopy  Drivers mounted inside 12.5" oversized canopy. See Apex Hanger Guide for more information. Hanger options 1&3 supplied with remote driver box.		

All Dimensions are nominal.

Light Source Definition

High Lumen Output						Low Lumen Output					
Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
36LED30/35/40	112	+85	50000	10203*	3000/3500/4000	36LED30/35/40LO	56	+85	50000	5577*	3000/3500/4000
48LED30/35/40	157	+85	50000	15935	3000/3500/4000	48LED30/35/40LO	85	+85	50000	7968*	3000/3500/4000
RGB	Contact Factory for Details										

*Pending IES Testing

Universal Voltage unless otherwise specified.