

CARDIFF

Indoor ADA Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.



LED Dimming: Integral 0-10V dimming driver standard.

Acrylic: Acrylic is UL-94 HB Flame Class rated.

Body: Formed 18ga steel or .050 aluminum body. Optional painted white perforated top and bottom diffuser.

Finish: Highly durable oven cured no VOC premium powder coat.

Custom: Contact factory for custom lengths and lamping.

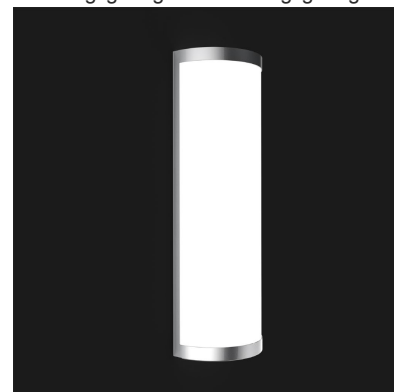

SAMPLE CATALOG NUMBER:					
GL-4515-		F5-	W-	NSN-	A
MODEL NO.		LAMPING	ACRYLIC	FINISH	OPTION(S)
GL-4515	W in 6"	F0. 1LED30	Standard: W. White Opal S. Satin White Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBN -Terra Brown TBZ -Textured Bronze	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. B. Top Perforated Cover Painted white. C. BTM Perforated Cover Painted white.
	H in 18"	F5. 1LED35			
	D in 4"	F4. 1LED40			

All dimensions are nominal.

Light Source Definition

Lamp	LED	CRI	Rated Life Hrs	Board Lumens	Board Kelvin
1LED30	14W	80	50000	1950	3000
1LED35	14W	80	50000	1950	3500
1LED40	14W	80	50000	1950	4000

Universal Voltage unless otherwise specified.