

CARDIFF RGB+W

Indoor ADA Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

RGB+White: LED option (RGB30, RGB35, & RGB40) features a full power white and RGB color changing light source. A second circuit controls the white channel. RGB channel wired DMX ready, full white 1% 0-10V dimming standard.

RGB: LED option features RGB color changing light source. RGB channel wired DMX ready. Remote driver.

Static Color: LED options (Red, Green, or Blue) feature static color.

Acrylic: Acrylic is UL-94 HB Flame Class rated.



Body: Formed 18ga steel or .050 aluminum body. Optional painted white perforated top and bottom diffuser.

Finish: Highly durable oven cured no VOC premium powder coat.

Custom: Contact factory for custom lengths and lamping.

DMX: Controls by others.

Surge Protection: External surge protector provided as standard.

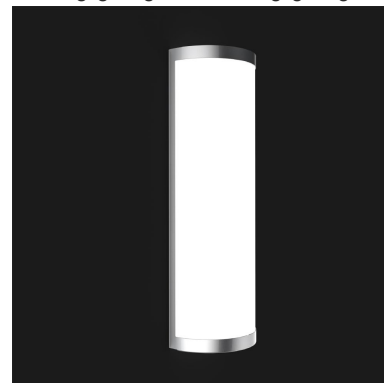

SAMPLE CATALOG NUMBER:					
GL-4515-		L-	W-	NSN-	A
MODEL NO.	LAMPING		ACRYLIC	FINISH	OPTION(S)
GL-4515	W in 6"	G. RED	Standard:	Standard:	A. No Options
	H in 18"	H. GREEN	W. White Opal	Powder Coat	EL. Emergency LED
	D in 4"	I. BLUE	S. Satin White	BLK-Black	Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
		J. RGB*	Acrylic is UL-94 HB Flame Class rated.	BL-Blue	B. Top Perforated Cover
		K. RGB30*		GR-Gray	Painted white.
		L. RGB35*		LG-Light Gray	C. BTM Perforated Cover
		M. RGB40*		BE-Beige	Painted white.
				PAB-Antique Brass	
				PA-Painted Aluminum	
				PTC-Painted Copper	
				WH-White	
				DBZ-Dark Bronze	
				NSN-New Satin Nickel	
				BRN-Brown	
				RD-Red	
				CH-Champagne	
				RG-Reed Green	
				SG-Sungold	
				GM-Gun Metal	
				POR-Oil Rubbed Bronze	
				Textured Powder	
				TLV-Light Verdigris	
				TWH-Textured White	
				TBL-Textured Black	
				TS-Textured Silver	
				TBN-Terra Brown	
				TBZ-Textured Bronze	

All dimensions are nominal.
*DMX controls supplied by others.

Light Source Definition

Code	LED	CRI	Rated Life Hrs	Board Lumens	Board Kelvin
RGB30	14W	+80	50000	1950	3000
RGB35	14W	+80	50000	1950	3500
RGB40	14W	+80	50000	1950	4000

Universal Voltage unless otherwise specified.