

CARDIFF WARM DIM

Indoor ADA Sconce



9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

Warm Dim: LED option (WD) features warm dimming technology that dims smoothly from 3500K-1800K with standard 0-10V dimming.

LED Dimming: Standard integral 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.



Acrylic: Acrylic is UL-94 HB Flame Class rated.

Body: Formed 18ga steel or .050 aluminum body. Optional painted white perforated top and bottom diffuser.

Finish: Highly durable oven cured no VOC premium powder coat.

Custom: Contact factory for custom lengths and lamping.

Surge Protection: External surge protector provided as standard.

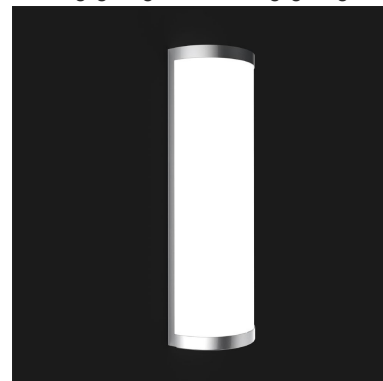

SAMPLE CATALOG NUMBER:				
GL-4515-	WD1-	W-	NSN-	A
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)
GL-4515 W in 6" mm 150 H in 18" mm 460 D in 4" mm 100	WD1	Standard: W. White Opal S. Satin White Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK -Black BL -Blue GR -Gray LG -Light Gray BE -Beige PAB -Antique Brass PA -Painted Aluminum PTC -Painted Copper WH -White DBZ -Dark Bronze NSN -New Satin Nickel BRN -Brown RD -Red CH -Champagne RG -Reed Green SG -Sungold GM -Gun Metal POR -Oil Rubbed Bronze Textured Powder TLV -Light Verdigris TWH -Textured White TBL -Textured Black TS -Textured Silver TBN -Terra Brown TBZ -Textured Bronze	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage. B. Top Perforated Cover Painted white. C. BTM Perforated Cover Painted white.

All dimensions are nominal.

Light Source Definition

Code	Total Wattage	Rated CRI	Rated Life Hrs	Board Lumens	Board Kelvin
WD1	21W	+90	50000	1950	3500-1800

Universal Voltage unless otherwise specified.