

CROSSROAD

Indoor Surface Mount





9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@lighting.com www.lighting.com

GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** 1% 0-10V dimming standard with LED lamping option.
- Body:** Body formed with 18ga steel.
- Acrylic:** UL-94 HB Flame Class rated.
- Modifications:** Consult factory for lamping, cluster, or sizing options.
- Finish:** Highly durable oven cured no VOC premium powder coat.
- Surge Protection:** External surge protector provided as standard.

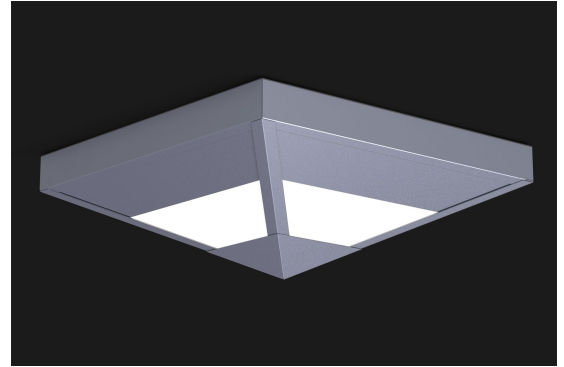

SAMPLE CATALOG NUMBER: GL-3607-		L85-	W-	NSN-	A-
MODEL NO.	LAMPING	ACRYLIC	FINISH	OPTION(S)	
GL-3605 21lbs W in 24" mm 610 10kg D in 9" mm 225	L40. 4LED30 F4. 4CF L45. 4LED35 IN4. 4MED L44. 4LED40	Standard: W. White Opal Optional: S. Satin White F. Faux Alabaster M. Earth Marble Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat BLK- Black BL- Blue GR- Gray LG- Light Gray BE- Beige PAB- Antique Brass PA- Painted Aluminum PTC- Painted Copper WH- White DBZ- Dark Bronze NSN- New Satin Nickel BRN- Brown RD- Red CH- Champagne RG- Reed Green SG- Sungold GM- Gun Metal POR- Oil Rubbed Bronze Textured Powder TLV- Light Verdigris TWH- Textured White TBL- Textured Black TS- Textured Silver TBN- Terra Brown TBZ- Textured Bronze	A. No Options B. Damp Location Available in powder coat finish. DE. ECO Dimming Lutron Ecosystem dimming CF lamping option. Specify voltage and wattage after dimming code. DV. Mark VII Dimming Advance Mark VII dimming CF lamping option. Specify voltage and wattage after dimming code. DX. Mark X Dimming Advance Mark X dimming CF lamping option. Specify voltage and wattage after dimming code. E. Emergency Ballast Operates one fluorescent lamp. Remote mount up to 5' from lamps in controlled environment with an area temperature range of 32°- 131°F. Non-dimming compact fluorescent only. Specify 120 or 277 voltage. EL. Emergency LED Remote mount up to 10' from lamping in controlled environment with an area temperature range of 32°-131°F. LED only. Specify 120 or 277 voltage.	
GL-3606 28lbs W in 30" mm 760 13kg D in 10 1/2" mm 265	L80. 8LED30 F4. 4CF L85. 8LED35 IN4. 4MED L84. 8LED40				
GL-3607 37lbs W in 36" mm 915 17kg D in 12 1/8" mm 310	L80. 8LED30 F8. 8CF L85. 8LED35 IN8. 8MED L84. 8LED40				
GL-3608 52lbs W in 46" mm 1170 24kg D in 14 3/4" mm 375	L80. 8LED30 F8. 8CF L85. 8LED35 IN8. 8MED L84. 8LED40				

Fixtures over 50 lbs require reinforced junction box
All dimensions are nominal.

Light Source Definition

Code	Total Wattage	Kelvin	Board Lumens	Code	Lamp	Fluorescent	Lamp Base	Lamp Lumens ¹
L40	57	3000	7580	F4, F8	CF	CF 26W/32W/42W	GX24q-3/4 4PIN	1530/2040/2690
L45	57	3500	7580	IN4, IN8	Med	A-19	Medium	
L44	57	4000	7580					
L80	113	3000	15160					
L85	113	3500	15160					
L84	113	4000	15160					

Universal Voltage unless otherwise specified.

¹Per MAXLITE & GE lamp products catalog

Contact factory for availability of other lamp configurations including induction and metal halide.

