

CUBIX II - Acoustic

Outer Acrylic Interior Surface Mount





9777 Reavis Park Drive
St. Louis, MO 63123
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

GENERAL SPECIFICATION

LED: High efficiency mid-power LEDs.
Lower Output: Lamping code ending with LO features lower lumen output.
LED Dimming: Standard 1% 0-10V dimming.
Driver: Max remote driver installation distance:
White LED 25ft from fixture body and RGB 45ft from fixture body.
RGB: DMX controller supplied by others.
Finish: Highly durable oven cured no VOC premium powder coat.
Mounting Plate: Matches fixture finish.
Surge Protection: External surge protector provided as standard.

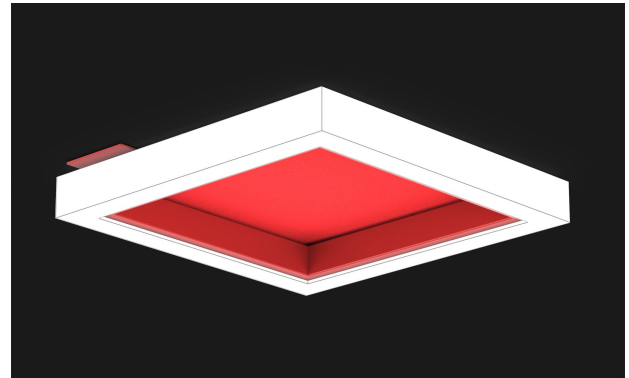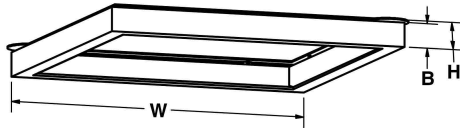

SAMPLE CATALOG NUMBER:					
GL-3832-	J-	BLK-	ABLK-	A	
MODEL NO.	LAMPING		FINISH	ACOUSTIC	OPTIONS
GL-3830 W in 24"x24" 10lbs B in 3" 4.5kg H in 3.5"	A. 24LED30 B. 24LED35 C. 24LED40 D. RGB	AL. 24LED30LO BL. 24LED35LO CL. 24LED40LO	Standard: Powder Coat BLK-Black BL-Blue GR-Gray LG-Light Gray BE-Beige PAB-Antique Brass PA-Painted Aluminum PTC-Painted Copper WH-White DBZ-Dark Bronze NSN-New Satin Nickel BRN-Brown RD-Red CH-Champagne RG-Reed Green SG-Sungold GM-Gun Metal POR-Oil Rubbed Bronze PG-Pine Green DO-Deep Orange PV-Purple Violet NB-Navy Blue	Standard: Acoustic ABLK-Black ABL-Blue AGR-Gray ALG-Light Gray ARD-Red	A. No Options EL. Emergency LED Must be remotely mounted in a controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
GL-3831 W in 36"x36" 15lbs B in 3" 6.8kg H in 3.5"	E. 36LED30 F. 36LED35 G. 36LED40 H. RGB	EL. 36LED30LO FL. 36LED35LO GL. 36LED40LO			
GL-3832 W in 48"x48" 15lbs B in 3" 6.8kg H in 3.5"	I. 48LED30 J. 48LED35 K. 48LED40 L. RGB	IL. 48LED30LO JL. 48LED35LO KL. 48LED40LO			
GL-3833 W in 60"x60" 19lbs B in 3" 10kg H in 3.5"	M. 60LED30 N. 60LED35 O. 60LED40 P. RGB	ML. 60LED30LO NL. 60LED35LO OL. 60LED40LO	Textured Powder TLV-Light Verdigris TWH-Textured White TBL-Textured Black TS-Textured Silver TBN-Terra Brown TBZ-Textured Bronze		
			Premium: SA-Satin Aluminum*		
			*Mounting Plate Painted Aluminum		

All Dimensions are nominal.

Light Source Definition

High Lumen Output						Low Lumen Output					
Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
24LED30/35/40	80	+85	50000	6802	3000/3500/4000	24LED30/35/40LO	43	+85	50000	3605*	3000/3500/4000
36LED30/35/40	112	+85	50000	10203*	3000/3500/4000	36LED30/35/40LO	56	+85	50000	5102*	3000/3500/4000
48LED30/35/40	160	+85	50000	13604*	3000/3500/4000	48LED30/35/40LO	85	+85	50000	7210*	3000/3500/4000
60LED30/35/40	200	+85	50000	17005*	3000/3500/4000	60LED30/35/40LO	112	+85	50000	9523*	3000/3500/4000
RGB	Contact Factory for Details										

*Pending IES Testing

Universal Voltage unless otherwise specified.